



HITACHI  
Air conditioning solutions

HITACHI

# SET FREE Σ

**VARIABLE REFRIGERANT FLOW**  
**AIR SOURCE COOLING ONLY TYPE**  
**CNCQ SERIES**

air

-  
Company Name

-  
CUSTOMER SERVICE

-  
SALES OFFICE


-  
SPARE PARTS

-  
DISTRIBUTOR

-  
CERTIFICATION

-  
WARRANTY

-  
SOCIAL MEDIA

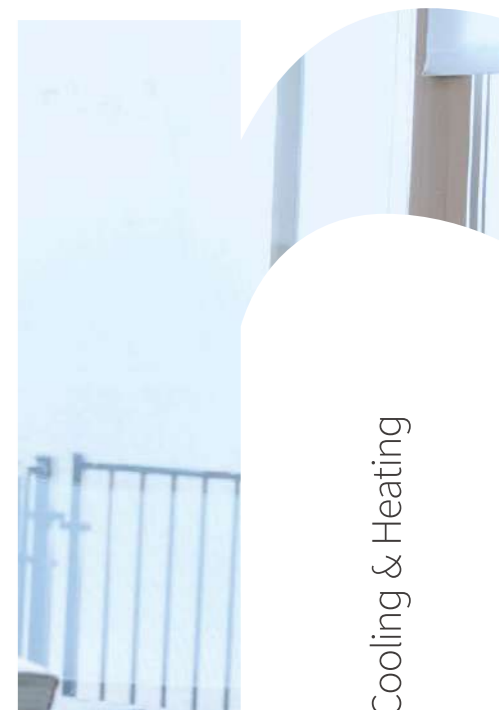

Cooling & Heating

# Welcome

## Air. It's a wonderful thing.

Invisible, silent and life-giving, air makes our entire world possible. It surrounds us, continuously energizing, cooling and warming. It can be unpredictable and sometimes challenging, but when air is in harmony with us, everything seems that much easier.

**This is our vision.  
To create the air that makes life better.**

## The beauty of balance

No matter what the weather is like outside, when you're indoors, you want to have complete control over your environment. At work or play, awake or asleep, you're free to create your own atmosphere; balancing energy with calm, sound with silence and light with shade. It's the same for cooling and heating.

**When the air around you is in balance, you can enjoy life indoors that much more.**

## Living Harmony

At Hitachi Cooling & Heating we like to think of this as creating harmony with your interior environment. When we achieve that wonderful balance, productivity, learning, happiness and health can thrive.

**We call this 'Living Harmony' and it's at the center of everything we do.**

## The future together

Living Harmony puts people first. By balancing the human needs of our customers with an uncompromising approach to innovation and quality, we can continue to create the technologies for a more comfortable and balanced world.

**Your world. We live in it together.**

# Your world and Hitachi

## Change in the air.

Change is one of the few constants in life. The world around us changes continuously and as it does, so do our own comfort levels and our requirements of our buildings.

Creating harmony in the face of change has always been the driving force behind Hitachi Cooling & Heating. From maintaining a perfect indoor climate indoors as the seasons change, to developing new technology to address the needs of our changing cities, we're committed to solutions that help people adapt to changes today and in the future.



## Design for tomorrow's urban spaces.

Space in our cities is under increasing pressure and as new buildings become more space efficient, the areas allocated to cooling and heating are shrinking. We are responding to these changes with a new generation of space-efficient outdoor units, giving architects, building managers and owners greater levels of flexibility.

Learn more about Outdoor Unit on page 07



SET FREE Σ CNCQ series

## Redefining comfort.

Comfort can be felt in a variety of ways, from the temperature to quietness and even the air flow itself. Our wide-ranging lineup of indoor units can meet various comfort requirements. We offer two different types of ventilation units, and optional motion sensors are also available for superior energy saving.

Learn more about Indoor Unit on page 29



YOUR WORLD AND Hitachi

## You are in control.

Whether you wish to create a relaxing atmosphere in your home, improve productivity at work or manage the energy and maintenance costs for your building, We give you the technology to achieve your goals. From setting individual climate zones in every room, to centralized monitoring and reporting for multiple buildings.

Learn more about Controller on page 61



# INDEX

## 07 OUTDOOR UNITS

- 09 LINE UP OVERVIEW
- 11 HIGH EFFICIENCY
- 13 DESIGN FLEXIBILITY
- 15 ADAPTABILITY
- 17 SPECIFICATIONS
- 27 OPTIONAL PARTS

## 29 INDOOR UNITS & VENTILATION

- 31 LINE UP OVERVIEW
- 35 CEILING CASSETTE
- 43 DUCTED
- 49 EXPOSED & CONCEALED
- 57 VENTILATION
- 59 OPTIONAL PARTS
- 60 INTRODUCTION OF MOTION SENSOR KIT

## 61 CONTROLLERS

- 63 LINE UP OVERVIEW
- 65 INDIVIDUAL CONTROLLERS
- 71 CENTRALIZED CONTROLLERS
- 81 H-LINK
- 83 OTHERS
- 85 OUR HERITAGE

---

# Raising the standard

The path to creating your perfect indoor environment begins outdoors with Hitachi Cooling & Heating's range of outdoor units — the first step toward achieving Living Harmony.

Protected by lighter and compact cabinets and powered by the world's most advanced compressor controller technology, the next generation SET FREE  $\Sigma$  outdoor units deliver superior performance, maximum installation flexibility and design flexibility.




# LINE UP OVERVIEW

## Widest Range: from 8 to 96HP class


The CNCQ Series is newly launched with a wide range of models in its lineup, as well as a variety of performance enhancements in design, power and economy. Select the product(s) most suitable for your application, either as a single unit or a combination of single units.

(HP Class / Cooling Capacity / Net Weight)




1,725mm  
958mm 782mm

**8HP Class / 22.4kW / 212kg**  
**10HP Class / 28.0kW / 213kg**  
**12HP Class / 33.5kW / 238kg**



1,725mm  
1,218mm 782mm


**14HP Class / 40.0kW / 295kg**  
**16HP Class / 45.0kW / 296kg**  
**18HP Class / 50.0kW / 341kg**



1,725mm  
1,608mm 782mm


**20HP Class / 56.0kW / 380kg**  
**22HP Class / 61.5kW / 402kg**  
**24HP Class / 68.0kW / 403kg**

Single module up to 24HP class!




1,725mm  
4,474mm 782mm

**60HP Class / 169.0kW / 1,079kg**  
**62HP Class / 174.5kW / 1,101kg**  
**64HP Class / 181.0kW / 1,102kg**  
**66HP Class / 186.0kW / 1,147kg**




1,725mm  
4,864mm 782mm

**68HP Class / 192.0kW / 1,186kg**  
**70HP Class / 197.5kW / 1,208kg**  
**72HP Class / 204.0kW / 1,209kg**




1,725mm  
5,322mm 782mm

**74HP Class / 208.0kW / 1,336kg**




1,725mm  
2,196mm 782mm

**26HP Class / 73.0kW / 509kg**  
**28HP Class / 78.5kW / 534kg**




1,725mm  
2,456mm 782mm

**30HP Class / 85.0kW / 591kg**  
**32HP Class / 90.0kW / 592kg**  
**34HP Class / 95.0kW / 637kg**




1,725mm  
2,846mm 782mm

**36HP Class / 101.0kW / 676kg**  
**38HP Class / 106.5kW / 698kg**  
**40HP Class / 113.0kW / 699kg**  
**42HP Class / 118.0kW / 744kg**



1,725mm  
5,712mm 782mm


**76HP Class / 214.0kW / 1,375kg**  
**78HP Class / 219.5kW / 1,397kg**



1,725mm  
6,492mm 782mm


**80HP Class / 224.0kW / 1,520kg**  
**82HP Class / 229.5kW / 1,542kg**  
**84HP Class / 236.0kW / 1,543kg**  
**86HP Class / 241.5kW / 1,565kg**  
**88HP Class / 248.0kW / 1,566kg**

Whole range up to 96HP class!




1,725mm  
6,492mm 782mm

**90HP Class / 253.5kW / 1,588kg**  
**92HP Class / 260.0kW / 1,589kg**  
**94HP Class / 265.5kW / 1,611kg**  
**96HP Class / 272.0kW / 1,612kg**




1,725mm  
3,236mm 782mm

**44HP Class / 124.0kW / 783kg**  
**46HP Class / 129.5kW / 805kg**  
**48HP Class / 136.0kW / 806kg**



1,725mm  
3,694mm 782mm

**50HP Class / 140.0kW / 933kg**



1,725mm  
4,084mm 782mm

**52HP Class / 146.0kW / 972kg**  
**54HP Class / 151.5kW / 994kg**  
**56HP Class / 158.0kW / 995kg**  
**58HP Class / 163.0kW / 1,040kg**

## SUMMARY TABLE


Item	Unit	CNCQ Series
Capacity	HP class	8- 96
	Nominal Cooling	kW 22.4 - 272.0
Maximum connectable indoor unit quantity		13 - 64
Combination capacity ratio between ODU and IDU		% 50 - 130
	Total piping length	m 1,000
Maximum piping length	Refrigerant piping length	Actual m 165
		Equivalent m 190
	Between piping connection kit and each outdoor unit	m 10
	Between 1st branch multi kit and farthest indoor unit	m 90
	Between multi kit and each indoor unit	m 40
	Between outdoor units (combination of base units)	m 0.1
Maximum level difference **	Between outdoor unit and indoor units	ODU above IDU m 50 (standard) / up to 110m (custom order)
		IDU above ODU m 40
	Between indoor units	m 30
Cooling operation range *	°C DB	10 to 52

\* For more details, please consult your distributors or dealer, or, refer to technical catalogue.  
 \*\* Concerning maximum level difference between ODU and IDU (ODU above IDU), Standard: up to 50 metre/Custom Order: up to 110 metre.  
 Longer piping (up to 110 metre) is available for 8 to 54HP class models only.  
 Maximum level difference for 56-96HP class is 90 metre.

# HIGH EFFICIENCY

## EFFICIENCY RATIO

EER: Energy Efficiency Ratio

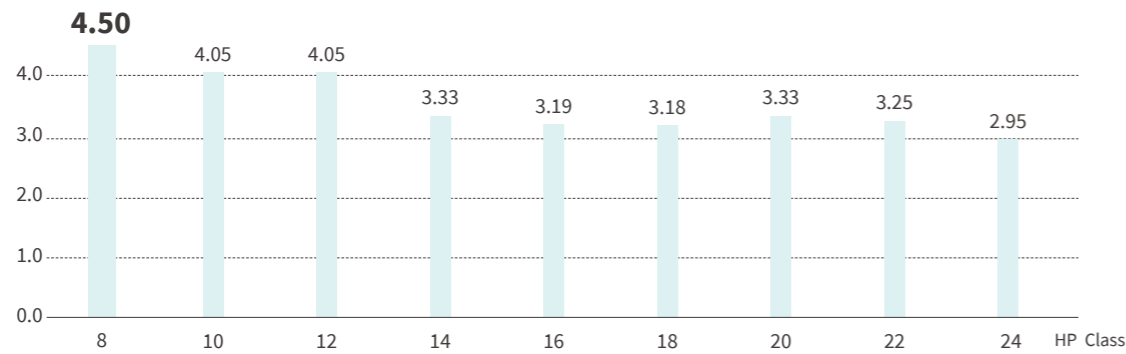


Notes:  
 1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre  
 2. Please see the technical catalogues for more details.

## 3 POINTS IMPROVEMENT

### 1) COMPRESSOR

#### Greater capacity control


The highly improved performance as well as greater energy saving is achieved by adopting newly developed high efficiency DC inverter compressor, with outstandingly precise control technology of 0.1Hz increments inverter frequency. Another feature is the dramatically extended working range, enabled by expanding the compressor's operating frequency band, both upwards and downwards.

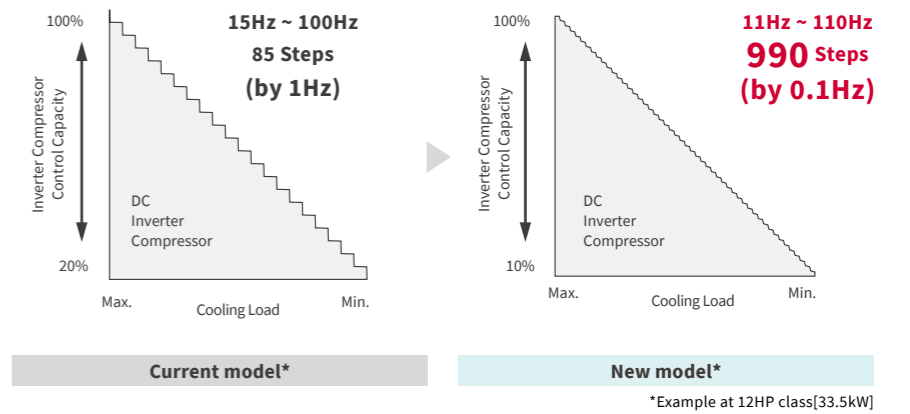

### 2) HEAT EXCHANGER

- The heat exchange area has been increased by more than **10%** (single module)
- Greater heat exchange efficiency


#### New shape

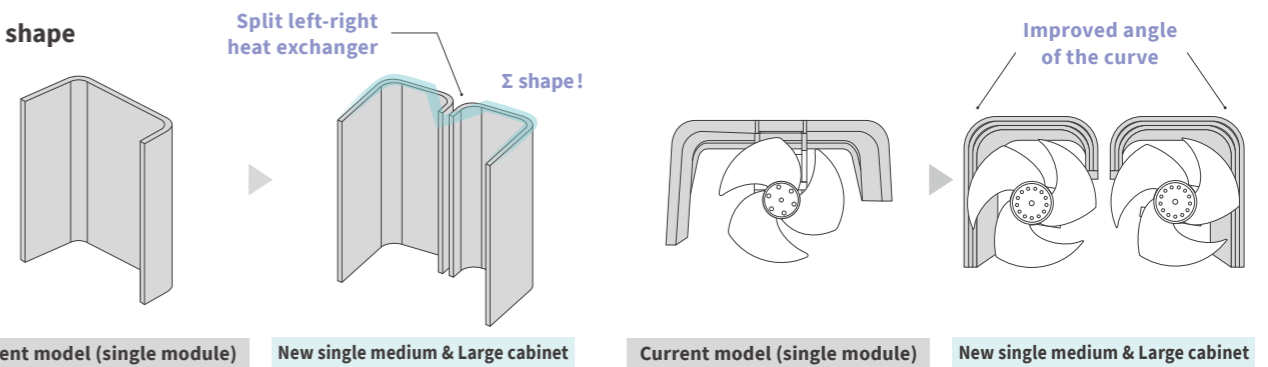

### 3) AIR OUTLET

- Improvement of airflow volume by **23%** (single module)
- Energy consumption in the driving shaft has decreased by **20%** on average

#### Expansion of air outlet

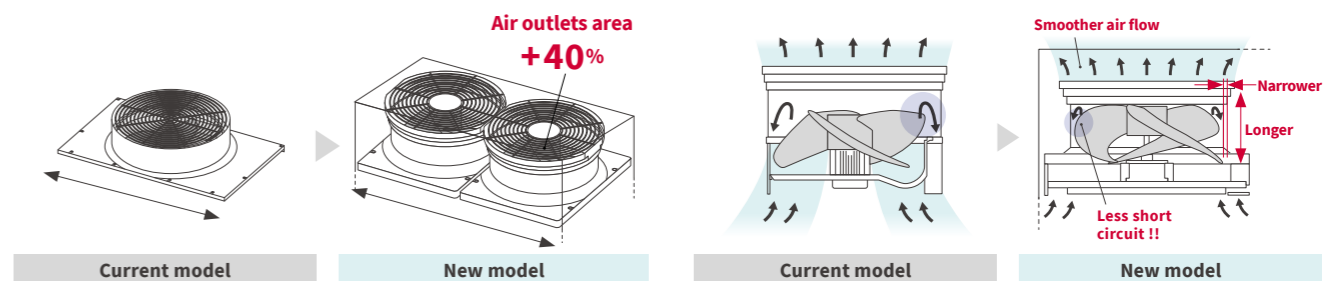

## WHAT'S IMPROVED?


1) COMPRESSOR   2) HEAT EXCHANGER   3) AIR OUTLET



## DESIGN FLEXIBILITY

### EASY TRANSPORTATION

- Smaller cabinet

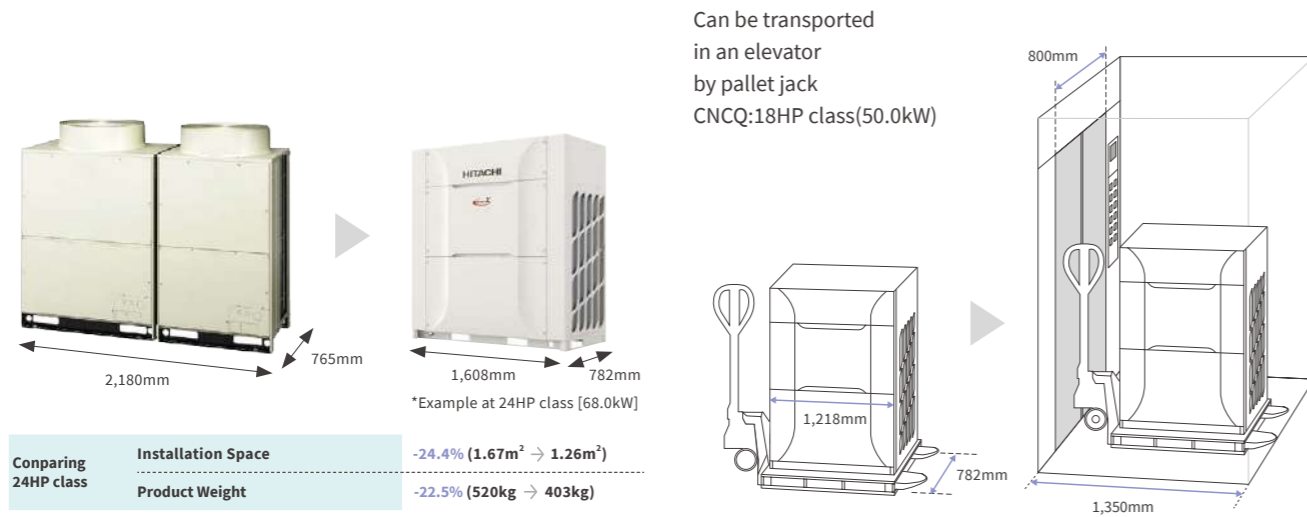


Comparing 24HP class	Installation Space	-24.4% (1.67m <sup>2</sup> → 1.26m <sup>2</sup> )
	Product Weight	-22.5% (520kg → 403kg)

### IMPROVED EXTERNAL STATIC PRESSURE

Both more numbers of setting of ESP (up to 4), and, higher ESP (up to 80Pa) of outdoor unit, offer better options for the indoor installation of the outdoor unit, which leads to 3 benefits for you.

- Less piping length
- Lower installation cost
- Visual aesthetics

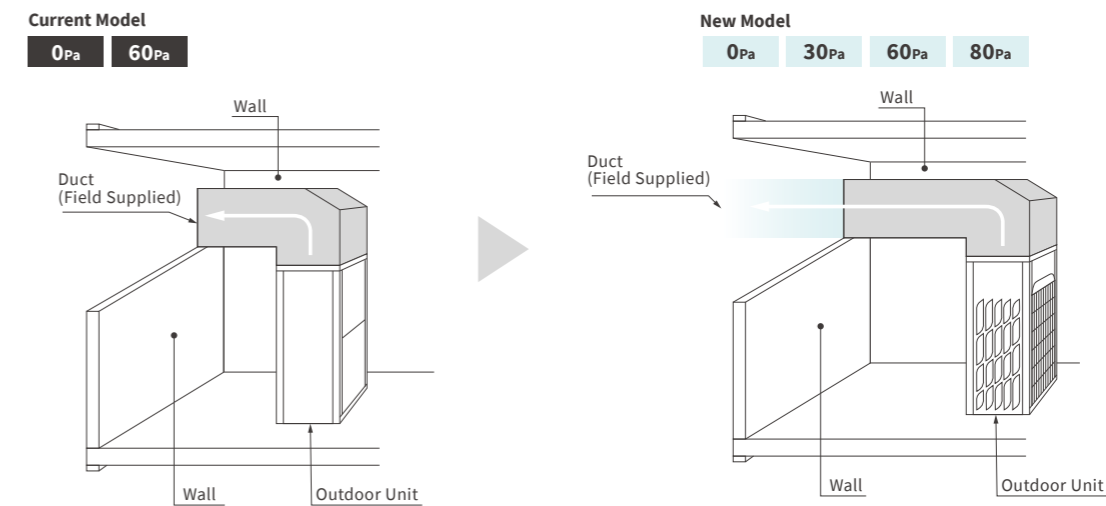

### PIPING CONNECTION WORKABILITY

- Suitable for a high-rise building or complex facilities.
- Leads to cost/time saving for designers, with more efficient design.


#### Maximum piping length

	Unit	
Total piping length	m	1,000
Refrigerant piping length	Actual	m 165
	Equivalent	m 190
Between "Piping connection kit" and each ODU	m	10
Between "1st branch Multi Kit" and farthest IDU	m	90
Between "Multi Kit" and each IDU	m	40

#### Maximum level difference


	Unit	
Between ODU (combination of base units)	m	0.1
Between ODU and IDU	ODU above IDU	m 50 (standard) / up to 110 (custom order)*
	IDU above ODU	m 40
Between indoor units	m	30

Each maximum length or level difference has several conditions, please refer to the technical documents in inquiry.  
 \* Standard: up to 50 metre/Custom Order: up to 110 metre.  
 Longer piping (up to 110 metre) is available for 8 to 54HP Class models only.  
 Maximum level difference for 56-96HP Class is 90 metre.

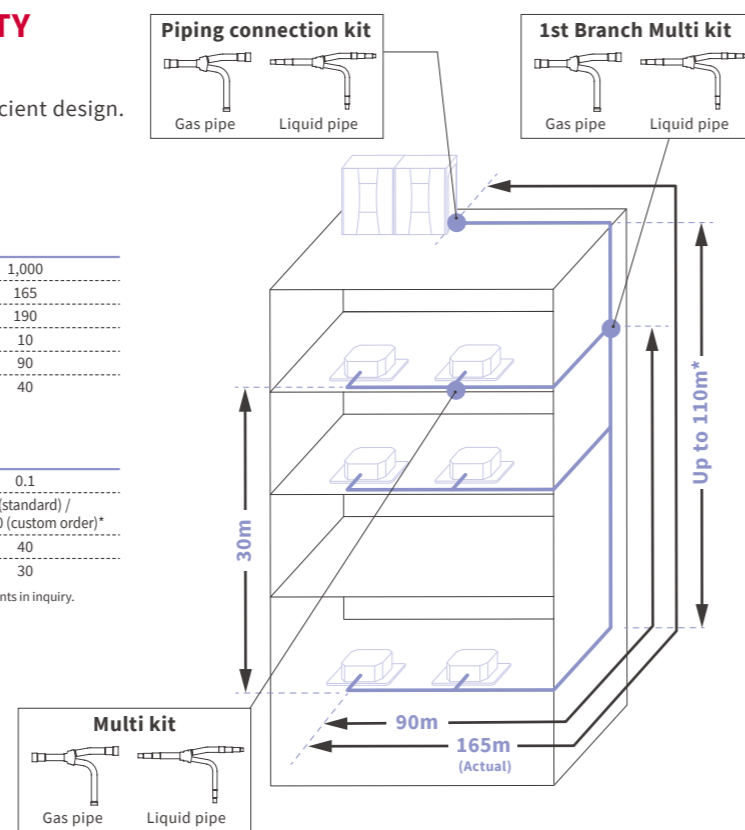

### OPERATION TEMPERATURE RANGE

Enhanced performance in consideration of the actual installation environment of the outdoor unit

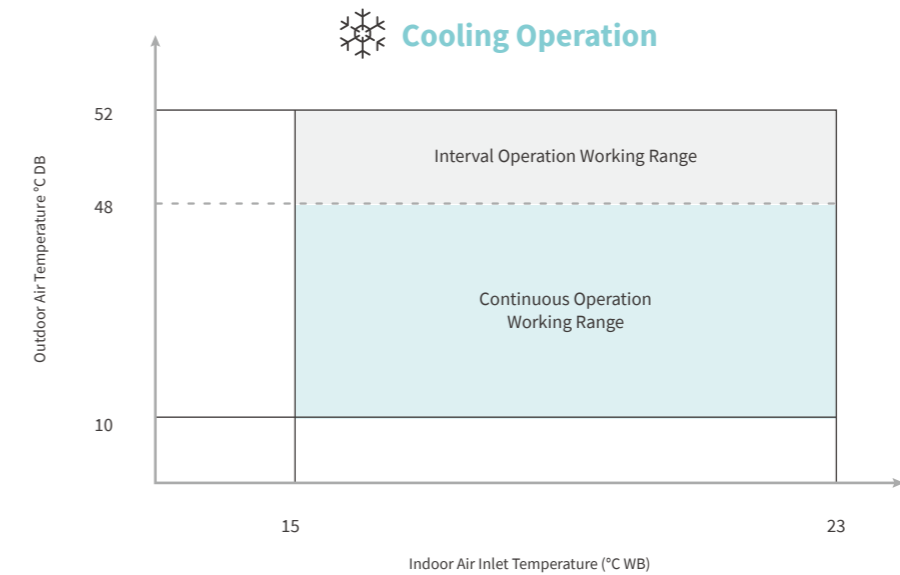




# ADAPTABILITY


## IMPROVED COMPRESSOR CONTROL

### Smooth drive

The model calculates the appropriate amount of refrigerant supplied by the outdoor units on the basis of information about the required load from the individual indoor units. The model employs smooth operation control to control the number of revolutions of the inverter compressor. The model supplies the appropriate amount of refrigerant to the indoor units according to the required load. The model increases energy-saving efficiency by operating smoothly while controlling the switching on and off of the compressor at low-load operation.

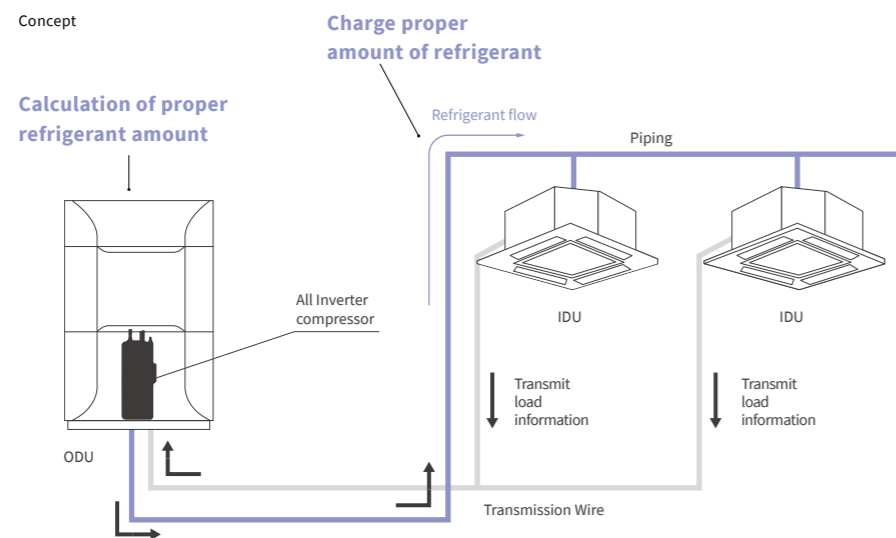


### Actual example of the new compressor control

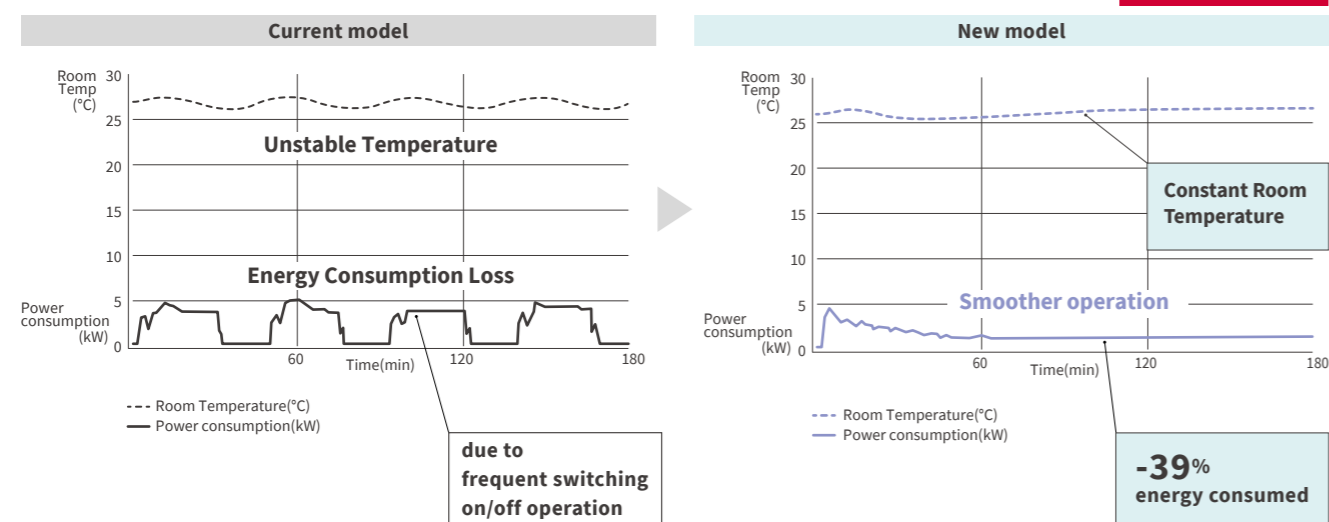


## TO PREVENT FAILURE

Standardize the running time of the individual outdoor units and distribute the load by rotating the order of operation of the compressors of the outdoor units.

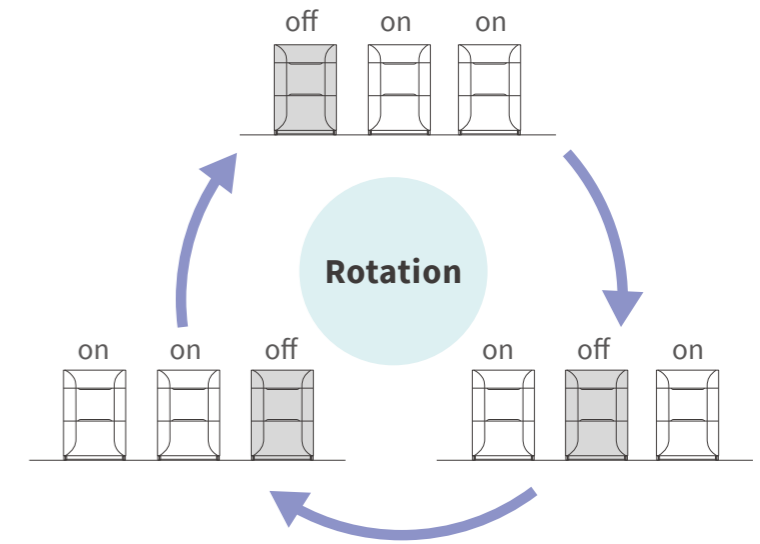


## BACK UP FUNCTION

Full introduction of backup operation function. If one outdoor unit should fail, the model can continue to operate using the remaining outdoor units, thereby preventing total system failure.

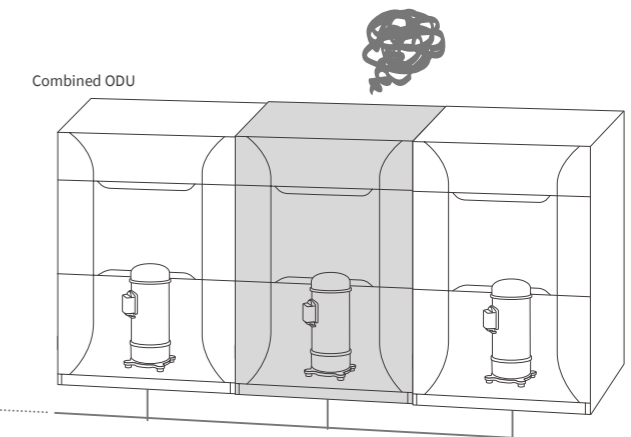

## GECKO-PROOF DESIGN

### 2 STEP GECKO-PROOF

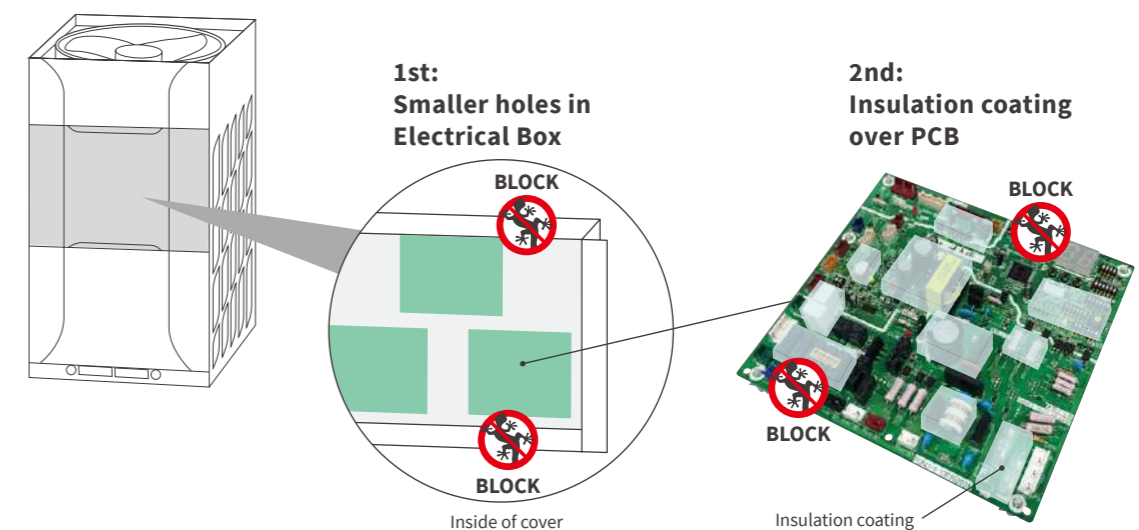

# SPECIFICATIONS



Model			RAS-8.0CNBCM-Q	RAS-10CNBCM-Q	RAS-12CNBCM-Q	RAS-14CNBCM-Q	RAS-16CNBCM-Q	RAS-18CNBCM-Q	RAS-20CNBCM-Q	RAS-22CNBCM-Q	RAS-24CNBCM-Q	
<b>Power Supply</b>			3N~, [380-415V/50Hz]			3N~, [380-415V/50Hz]						
<b>Cooling (1) 35°C (Nominal)</b>	<b>Capacity</b>	<b>kW</b>	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	
		<b>Btu/h</b>	76,000	96,000	114,000	136,000	154,000	171,000	191,000	210,000	232,000	
	<b>Power Input</b>	<b>kW</b>	4.98	6.91	8.27	12.00	14.10	15.70	16.80	18.90	23.05	
		<b>(Btu/h)/W</b>	15.26	13.89	13.78	11.33	10.92	10.89	11.37	11.11	10.07	
<b>EER</b>	<b>kW/kW</b>	4.50	4.05	4.05	3.33	3.19	3.18	3.33	3.25	2.95		
<b>Unit Color (Munsell Color System)</b>			Natural White			Natural White						
<b>Max. Sound Pressure Level</b>			Normal			Normal						
			<b>dB (A)</b>	58	60	60	62	63	64	65	65	66
<b>Dimensions</b>	<b>Unit</b>	<b>mm</b>	1,725×958×782	1,725×958×782	1,725×958×782	1,725×1,218×782	1,725×1,218×782	1,725×1,218×782	1,725×1,608×782	1,725×1,608×782	1,725×1,608×782	
	<b>(H×W×D)</b>											
<b>Package</b>	<b>mm</b>	1,888×1,020×841	1,888×1,020×841	1,888×1,020×841	1,888×1,280×841	1,888×1,280×841	1,888×1,280×841	1,888×1,680×841	1,888×1,680×841	1,888×1,680×841	1,888×1,680×841	
<b>Weight</b>	<b>Net</b>	<b>kg</b>	212	213	238	295	296	341	380	402	403	
	<b>Gross</b>	<b>kg</b>	237	238	263	321	322	367	408	430	431	
<b>Refrigerant</b>	<b>Type</b>		R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	
	<b>Charge</b>	<b>kg</b>	5	5	7.2	8.9	9.9	10.7	11.3	11.3	12.6	
<b>Compressor (Scroll)</b>	<b>Quantity</b>		1	1	1	1	1	2	2	2	2	
	<b>Motor Output (Pole)</b>	<b>kW</b>	4.1(6)	6.2(6)	7.4(6)	9.8(6)	11.3(6)	6.7×2(6)	6.8×2(6)	7.9×2(6)	9.0×2(6)	
<b>Condenser Fan (Propeller Fan)</b>	<b>Quantity</b>		1	1	1	2	2	2	2	2	2	
	<b>Air Flow Rate</b>	<b>m<sup>3</sup>/min</b>	165	170	190	239	256	256	329	329	348	
	<b>Motor Output (Pole)</b>	<b>kW</b>	0.26(8)	0.28(8)	0.42(8)	0.33×2(8)	0.39×2(8)	0.39×2(8)	0.48×2(8)	0.48×2(8)	0.56×2(8)	
<b>Main Refrigerant Piping</b>	<b>2-pipe cooling only System</b>	<b>Liquid Line</b>	<b>mm[in.]</b>	φ9.52[3/8]	φ9.52[3/8]	φ12.7[1/2]	φ12.7[1/2]	φ12.7[1/2]	φ15.88[5/8]	φ15.88[5/8]	φ15.88[5/8]	
		<b>Gas Line Low Pressure</b>	<b>mm[in.]</b>	φ19.05[3/4]	φ22.2[7/8]	φ25.4[1]	φ25.4[1]	φ28.58[1-1/8]	φ28.58[1-1/8]	φ28.58[1-1/8]	φ28.58[1-1/8]	φ28.58[1-1/8]
<b>Approx. Packing Measurement</b>			<b>m<sup>3</sup></b>	1.62	1.62	1.62	2.03	2.03	2.03	2.67	2.67	2.67

Notes:  
 1. The cooling performances are the values when combined with our specified indoor units (piping length: 7.5 metre, piping lift: 0 metre).  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27.0°C DB  
 19.0°C WB  
 Outdoor Air Inlet Temperature: 35°C DB  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions:  
 1 metre from the unit service cover surface, and 1.5 metre from floor level.  
 The above data is based on the cooling mode.  
 3. Except for the specified combination in the table (26-96HP class), there is no other combination of the base unit.  
 4. The width (outer dimensions) is the value when each distance between the base outer units is specified to 20mm.

# SPECIFICATIONS

## Model



RAS-26CNBCMQ



RAS-28CNBCMQ



RAS-30CNBCMQ

RAS-32CNBCMQ

RAS-34CNBCMQ

RAS-36CNBCMQ

RAS-38CNBCMQ

RAS-40CNBCMQ

RAS-42CNBCMQ

Combination of base module unit			RAS-10CNBCMQ RAS-16CNBCMQ	RAS-12CNBCMQ RAS-16CNBCMQ	RAS-14CNBCMQ RAS-16CNBCMQ	RAS-16CNBCMQ RAS-16CNBCMQ	RAS-16CNBCMQ RAS-18CNBCMQ	RAS-16CNBCMQ RAS-20CNBCMQ	RAS-16CNBCMQ RAS-22CNBCMQ	RAS-16CNBCMQ RAS-24CNBCMQ	RAS-18CNBCMQ RAS-24CNBCMQ	
Power Supply			3N~, [380-415V/50Hz]			3N~, [380-415V/50Hz]						
Cooling (1) 35°C (Nominal)	Capacity	kW	73.0	78.5	85.0	90.0	95.0	101.0	106.5	113.0	118.0	
		Btu/h	249,000	268,000	290,000	307,000	324,000	345,000	363,000	386,000	403,000	
	Power Input	kW	21.01	22.37	26.10	28.20	29.80	30.90	33.00	37.15	38.75	
		(Btu/h)/W	11.85	11.98	11.11	10.89	10.87	11.17	11.00	10.39	10.40	
EER	kW/kW	3.47	3.51	3.26	3.19	3.19	3.27	3.23	3.04	3.05		
Unit Color (Munsell Color System)			Natural White			Natural White						
Max. Sound Pressure Level		Normal	dB (A)	66	66	66	66	67	67	68	68	
Dimensions	Unit	(H×W×D)	mm	1,725×2,196×782			1,725×2,456×782		1,725×2,846×782		1,725×2,846×782	
				1,725×2,196×782			1,725×2,456×782		1,725×2,846×782		1,725×2,846×782	
Weight			kg	213+296			296+296		296+380		296+403	
				238+322			321+322		322+408		322+430	
Refrigerant			kg	R410A			R410A		R410A		R410A	
				14.9			18.8		20.6		22.5	
Compressor (Scroll)			kW	1+1			1+1		1+2		1+2	
				6.2(6)+11.3(6)			9.8(6)+11.3(6)		11.3(6)+11.3(6)		11.3(6)+6.7×2(6)	
Condenser Fan (Propeller Fan)			m <sup>3</sup> /min	170+256			256+256		256+329		256+348	
				190+256			239+256		256+256		256+329	
Main Refrigerant Piping	2-pipe cooling only System		mm[in.]	φ19.05[3/4]			φ19.05[3/4]		φ19.05[3/4]		φ19.05[3/4]	
				φ31.75[1-1/4]			φ31.75[1-1/4]		φ31.75[1-1/4]		φ38.1[1-1/2]	

Notes:  
 1. The cooling performances are the values when combined with our specified indoor units (piping length: 7.5 metre, piping lift: 0 metre).  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27.0°C DB  
 19.0°C WB  
 Outdoor Air Inlet Temperature: 35°C DB  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions:  
 1 metre from the unit service cover surface, and 1.5 metre from floor level.  
 The above data is based on the cooling mode.  
 3. Except for the specified combination in the table (26-96HP class), there is no other combination of the base unit.  
 4. The width (outer dimensions) is the value when each distance between the base outer units is specified to 20mm.

# SPECIFICATIONS



Model			RAS-44CNBCMQ	RAS-46CNBCMQ	RAS-48CNBCMQ	RAS-50CNBCMQ	RAS-52CNBCMQ	RAS-54CNBCMQ	RAS-56CNBCMQ	RAS-58CNBCMQ	RAS-60CNBCMQ	
Combination of base module unit			RAS-20CNBCMQ RAS-24CNBCMQ	RAS-22CNBCMQ RAS-24CNBCMQ	RAS-24CNBCMQ RAS-24CNBCMQ	RAS-16CNBCMQ RAS-16CNBCMQ RAS-18CNBCMQ	RAS-16CNBCMQ RAS-16CNBCMQ RAS-20CNBCMQ	RAS-16CNBCMQ RAS-16CNBCMQ RAS-22CNBCMQ	RAS-16CNBCMQ RAS-16CNBCMQ RAS-24CNBCMQ	RAS-16CNBCMQ RAS-18CNBCMQ RAS-24CNBCMQ	RAS-16CNBCMQ RAS-20CNBCMQ RAS-24CNBCMQ	
Power Supply			3N~, [380-415V/50Hz]			3N~, [380-415V/50Hz]						
Cooling (1) 35°C (Nominal)	Capacity	kW	124.0	129.5	136.0	140.0	146.0	151.5	158.0	163.0	169.0	
		Btu/h	423,000	442,000	464,000	478,000	498,000	517,000	539,000	556,000	577,000	
	Power Input	kW	39.85	41.95	46.10	43.90	45.00	47.10	51.25	52.85	53.95	
		(Btu/h)/W	10.61	10.54	10.07	10.89	11.07	10.98	10.52	10.52	10.70	
EER	kW/kW	3.11	3.09	2.95	3.19	3.24	3.22	3.08	3.08	3.13		
Unit Color (Munsell Color System)			Natural White			Natural White						
Max. Sound Pressure Level		Normal	dB (A)	69	69	69	69	69	69	70	70	
Dimensions	Unit	(H×W×D)	mm	1,725×3,236×782	1,725×3,236×782	1,725×3,236×782	1,725×3,694×782	1,725×4,084×782	1,725×4,084×782	1,725×4,084×782	1,725×4,474×782	
	Weight	Net	kg	380+403	402+403	403+403	296+296+341	296+296+380	296+296+402	296+296+403	296+341+403	296+380+403
		Gross	kg	408+431	430+431	431+431	322+322+367	322+322+408	322+322+430	322+322+431	322+367+431	322+408+431
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	
	Charge	kg	23.9	23.9	25.2	30.5	31.1	31.1	32.4	33.2	33.8	
	Quantity		2+2	2+2	2+2	1+1+2	1+1+2	1+1+2	1+1+2	1+2+2	1+2+2	
Compressor (Scroll)	Motor Output (Pole)	kW	6.8×2(6)+9.0×2(6)	7.9×2(6)+9.0×2(6)	9.0×2(6)+9.0×2(6)	11.3(6)+11.3(6)+6.7×2(6)	11.3(6)+11.3(6)+6.8×2(6)	11.3(6)+11.3(6)+7.9×2(6)	11.3(6)+11.3(6)+9.0×2(6)	11.3(6)+6.7×2(6)+9.0×2(6)	11.3(6)+6.8×2(6)+9.0×2(6)	
	Quantity		4	4	4	6	6	6	6	6	6	
	Air Flow Rate	m <sup>3</sup> /min	329+348	329+348	348+348	256+256+256	256+256+329	256+256+329	256+256+348	256+256+348	256+329+348	
Condenser Fan (Propeller Fan)	Motor Output (Pole)	kW	0.48×2(8)+0.56×2(8)	0.48×2(8)+0.56×2(8)	0.56×2(8)+0.56×2(8)	0.39×2(8)+0.39×2(8)+0.39×2(8)	0.39×2(8)+0.39×2(8)+0.48×2(8)	0.39×2(8)+0.39×2(8)+0.48×2(8)	0.39×2(8)+0.39×2(8)+0.56×2(8)	0.39×2(8)+0.39×2(8)+0.56×2(8)	0.39×2(8)+0.48×2(8)+0.56×2(8)	
	Quantity		4	4	4	6	6	6	6	6	6	
Main Refrigerant Piping	2-pipe cooling only System	Liquid Line	mm[in.]	φ19.05[3/4]	φ19.05[3/4]	φ19.05[3/4]	φ19.05[3/4]	φ19.05[3/4]	φ19.05[3/4]	φ19.05[3/4]	φ19.05[3/4]	
		Gas Line Low Pressure	mm[in.]	φ38.1[1-1/2]	φ38.1[1-1/2]	φ38.1[1-1/2]	φ38.1[1-1/2]	φ38.1[1-1/2]	φ38.1[1-1/2]	φ44.45[1-3/4]	φ44.45[1-3/4]	

Notes:  
 1. The cooling performances are the values when combined with our specified indoor units (piping length: 7.5 metre, piping lift: 0 metre).  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27.0°C DB  
 19.0°C WB  
 Outdoor Air Inlet Temperature: 35°C DB  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions:  
 1 metre from the unit service cover surface, and 1.5 metre from floor level.  
 The above data is based on the cooling mode.  
 3. Except for the specified combination in the table (26-96HP class), there is no other combination of the base unit.  
 4. The width (outer dimensions) is the value when each distance between the base outer units is specified to 20mm.

SPECIFICATIONS

Model

Combination of base module unit



RAS-62CNBCMQ

RAS-16CNBCMQ  
RAS-22CNBCMQ  
RAS-24CNBCMQ



RAS-64CNBCMQ

RAS-16CNBCMQ  
RAS-24CNBCMQ  
RAS-24CNBCMQ



RAS-66CNBCMQ

RAS-18CNBCMQ  
RAS-24CNBCMQ  
RAS-24CNBCMQ



RAS-68CNBCMQ

RAS-20CNBCMQ  
RAS-24CNBCMQ  
RAS-24CNBCMQ



RAS-70CNBCMQ

RAS-22CNBCMQ  
RAS-24CNBCMQ  
RAS-24CNBCMQ



RAS-72CNBCMQ

RAS-24CNBCMQ  
RAS-24CNBCMQ  
RAS-24CNBCMQ



RAS-74CNBCMQ

RAS-16CNBCMQ  
RAS-16CNBCMQ  
RAS-18CNBCMQ  
RAS-24CNBCMQ



RAS-76CNBCMQ

RAS-16CNBCMQ  
RAS-16CNBCMQ  
RAS-20CNBCMQ  
RAS-24CNBCMQ



RAS-78CNBCMQ

RAS-16CNBCMQ  
RAS-16CNBCMQ  
RAS-22CNBCMQ  
RAS-24CNBCMQ

Power Supply			3N~, [380-415V/50Hz]			3N~, [380-415V/50Hz]			3N~, [380-415V/50Hz]					
Cooling (1) 35°C (Nominal)	Capacity	kW	174.5	181.0	186.0	192.0	197.5	204.0	208.0	214.0	219.5			
		Btu/h	595,000	618,000	635,000	655,000	674,000	696,000	710,000	730,000	749,000			
	Power Input	kW	56.05	60.20	61.80	62.90	65.00	69.15	66.95	68.05	70.15			
		EER	(Btu/h)/W	10.62	10.27	10.28	10.41	10.37	10.07	10.60	10.73	10.68		
		kW/kW	3.11	3.01	3.01	3.05	3.04	2.95	3.11	3.14	3.13			
Unit Color (Munsell Color System)			Natural White			Natural White			Natural White					
Max. Sound Pressure Level			Normal	dB (A)	70	70	70	71	71	71	71			
Dimensions			Unit	(H×W×D)	mm	1,725×4,474×782	1,725×4,474×782	1,725×4,474×782	1,725×4,864×782	1,725×4,864×782	1,725×4,864×782	1,725×5,322×782	1,725×5,712×782	1,725×5,712×782
Weight	Net		kg	296+402+403	296+403+403	341+403+403	380+403+403	402+403+403	403+403+403	296+296+341+403	296+296+380+403	296+296+402+403		
	Gross		kg	322+430+431	322+431+431	367+431+431	408+431+431	430+431+431	431+431+431	322+322+367+431	322+322+408+431	322+322+430+431		
Refrigerant	Type			R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A		
	Charge		kg	33.8	35.1	35.9	36.5	36.5	37.8	43.1	43.7	43.7		
Compressor (Scroll)	Quantity			1+2+2	1+2+2	2+2+2	2+2+2	2+2+2	2+2+2	1+1+2+2	1+1+2+2	1+1+2+2		
	Motor Output (Pole)		kW	11.3(6)+7.9×2(6)+9.0×2(6)	11.3(6)+9.0×2(6)+9.0×2(6)	6.7×2(6)+9.0×2(6)+9.0×2(6)	6.8×2(6)+9.0×2(6)+9.0×2(6)	7.9×2(6)+9.0×2(6)+9.0×2(6)	9.0×2(6)+9.0×2(6)+9.0×2(6)	11.3(6)+11.3(6)+6.7×2(6)+9.0×2(6)	11.3(6)+11.3(6)+6.8×2(6)+9.0×2(6)	11.3(6)+11.3(6)+7.9×2(6)+9.0×2(6)		
		Quantity		6	6	6	6	6	6	8	8	8		
Condenser Fan (Propeller Fan)	Air Flow Rate		m <sup>3</sup> /min	256+329+348	256+348+348	256+348+348	329+348+348	329+348+348	348+348+348	256+256+256+348	256+256+329+348	256+256+329+348		
	Motor Output (Pole)		kW	0.39×2(8)+0.48×2(8)+0.56×2(8)	0.39×2(8)+0.56×2(8)+0.56×2(8)	0.39×2(8)+0.56×2(8)+0.56×2(8)	0.48×2(8)+0.56×2(8)+0.56×2(8)	0.48×2(8)+0.56×2(8)+0.56×2(8)	0.56×2(8)+0.56×2(8)+0.56×2(8)	0.39×2(8)+0.39×2(8)+0.39×2(8)+0.56×2(8)	0.39×2(8)+0.39×2(8)+0.48×2(8)+0.56×2(8)	0.39×2(8)+0.39×2(8)+0.48×2(8)+0.56×2(8)		
Main Refrigerant Piping	2-pipe cooling only System		Liquid Line	mm[in.]	φ19.05[3/4]	φ19.05[3/4]	φ19.05[3/4]	φ22.2[7/8]	φ22.2[7/8]	φ22.2[7/8]	φ22.2[7/8]	φ22.2[7/8]	φ22.2[7/8]	
			Gas Line Low Pressure	mm[in.]	φ44.45[1-3/4]	φ44.45[1-3/4]	φ44.45[1-3/4]	φ44.45[1-3/4]	φ44.45[1-3/4]	φ44.45[1-3/4]	φ50.8[2]	φ50.8[2]	φ50.8[2]	

Notes:  
 1. The cooling performances are the values when combined with our specified indoor units (piping length: 7.5 metre, piping lift: 0 metre).  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27.0°C DB  
 19.0°C WB  
 Outdoor Air Inlet Temperature: 35°C DB  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions:  
 1 metre from the unit service cover surface, and 1.5 metre from floor level.  
 The above data is based on the cooling mode.  
 3. Except for the specified combination in the table (26-96HP class), there is no other combination of the base unit.  
 4. The width (outer dimensions) is the value when each distance between the base outer units is specified to 20mm.

SET FREE Σ CNCQ series

SPECIFICATIONS

# SPECIFICATIONS



Model			RAS-80CNBCM	RAS-82CNBCM	RAS-84CNBCM	RAS-86CNBCM	RAS-88CNBCM	RAS-90CNBCM	RAS-92CNBCM	RAS-94CNBCM	RAS-96CNBCM
Combination of base module unit			RAS-20CNBCM RAS-20CNBCM RAS-20CNBCM RAS-20CNBCM	RAS-20CNBCM RAS-20CNBCM RAS-20CNBCM RAS-22CNBCM	RAS-20CNBCM RAS-20CNBCM RAS-20CNBCM RAS-24CNBCM	RAS-20CNBCM RAS-20CNBCM RAS-22CNBCM RAS-24CNBCM	RAS-20CNBCM RAS-20CNBCM RAS-24CNBCM RAS-24CNBCM	RAS-20CNBCM RAS-22CNBCM RAS-24CNBCM RAS-24CNBCM	RAS-20CNBCM RAS-24CNBCM RAS-24CNBCM RAS-24CNBCM	RAS-22CNBCM RAS-24CNBCM RAS-24CNBCM RAS-24CNBCM	RAS-24CNBCM RAS-24CNBCM RAS-24CNBCM RAS-24CNBCM
Power Supply			3N~, [380-415V/50Hz]			3N~, [380-415V/50Hz]					
Cooling (1) 35°C (Nominal)	Capacity	kW	224.0	229.5	236.0	241.5	248.0	253.5	260.0	265.5	272.0
		Btu/h	764,000	783,000	805,000	824,000	846,000	865,000	887,000	906,000	928,000
	Power Input	kW	67.20	69.30	73.45	75.55	79.70	81.80	85.95	88.05	92.20
		(Btu/h)/W	11.37	11.30	10.96	10.91	10.61	10.57	10.32	10.29	10.07
EER	kW/kW	3.33	3.31	3.21	3.20	3.11	3.10	3.03	3.02	2.95	
	Unit Color (Munsell Color System)			Natural White			Natural White				
Max. Sound Pressure Level			Normal			dB (A)					
Dimensions			Unit			(H×W×D)					
Weight			Net			kg					
Refrigerant			Type			R410A					
Compressor (Scroll)			Charge			kg					
Condenser Fan (Propeller Fan)			Quantity			2+2+2+2					
Main Refrigerant Piping			Motor Output (Pole)			kW					
2-pipe cooling only System			Quantity			8					
Liquid Line			Air Flow Rate			m <sup>3</sup> /min					
Gas Line Low Pressure			Motor Output (Pole)			kW					

Notes:  
 1. The cooling performances are the values when combined with our specified indoor units (piping length: 7.5 metre, piping lift: 0 metre).  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27.0°C DB  
 19.0°C WB  
 Outdoor Air Inlet Temperature: 35°C DB  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions:  
 1 metre from the unit service cover surface, and 1.5 metre from floor level.  
 The above data is based on the cooling mode.

3. Except for the specified combination in the table (26-96HP class), there is no other combination of the base unit.

4. The width (outer dimensions) is the value when each distance between the base outer units is specified to 20mm.


SET FREE Σ CNCQ series  
 SPECIFICATIONS

# OPTIONAL PARTS

## PIPING CONNECTION KIT

Model	Outdoor unit capacity	Number of modules of 1 outdoor unit
M-30SNQ	26-34HP class	2
M-46SNQ	36-48HP class	2
M-30SNQ+M-46SNQ	50-54HP class	3
M-30SNQ+M-68SNQ	56-72HP class	3
M-30SNQ+M-30SNQ+M-68SNQ	74-96HP class	4

Example: M-30SNQ

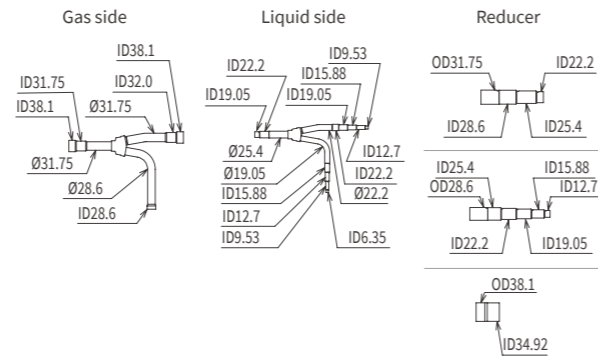


## MULTI-KIT

### 1) 1st branch Multi-kit


Main Piping ≥ 100m		Main Piping < 100m	
Model	Outdoor unit capacity	Model	Outdoor unit capacity
E-162SN	8-10HP class	E-102SN	8-10HP class
E-242SN	12-14HP class	E-162SN	12-16HP class
E-302SN	16-24HP class	E-242SN	18-24HP class
E-462SN	26-54HP class	E-302SN	26-54HP class
E-682SN	56-96HP class	E-462SN	56-72HP class
		E-682SN	74-96HP class

Example: E-462SN

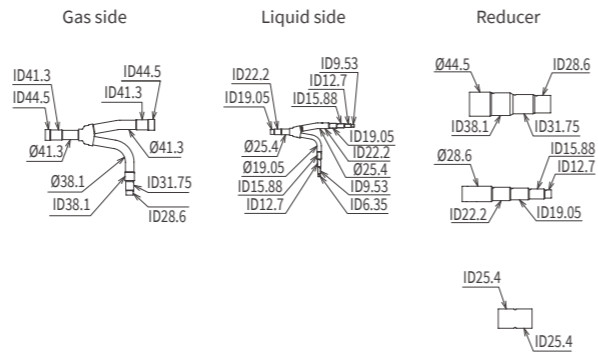

### 2) Multi-kit after 1st branch and pipe diameter

Model	Q= Total indoor unit capacity (kW)	Diameter (mm)	
		Gas Pipe	Liquid Pipe
E-102SN	Q ≤ 15.9	15.88	9.52
	16 ≤ Q < 25	19.05	9.52
	25 ≤ Q < 33.5	22.2	9.52
E-162SN	33.5 ≤ Q < 45	25.4	12.7
	45 ≤ Q < 50	28.58	12.7
E-242SN	50 ≤ Q < 72.9	28.58	15.88
	72.9 ≤ Q < 100.8	31.75	19.05
E-302SN	100.8 ≤ Q < 156.8	38.1	19.05
	156.8 ≤ Q < 190.4	44.45	19.05
E-462SN	190.4 ≤ Q < 207.2	44.45	22.2
	207.2 ≤ Q < 252	50.8	22.2
E-682SN	252 ≤ Q < 274.4	50.8	25.4
	274.4 ≤ Q < 349.5	50.8	28.58

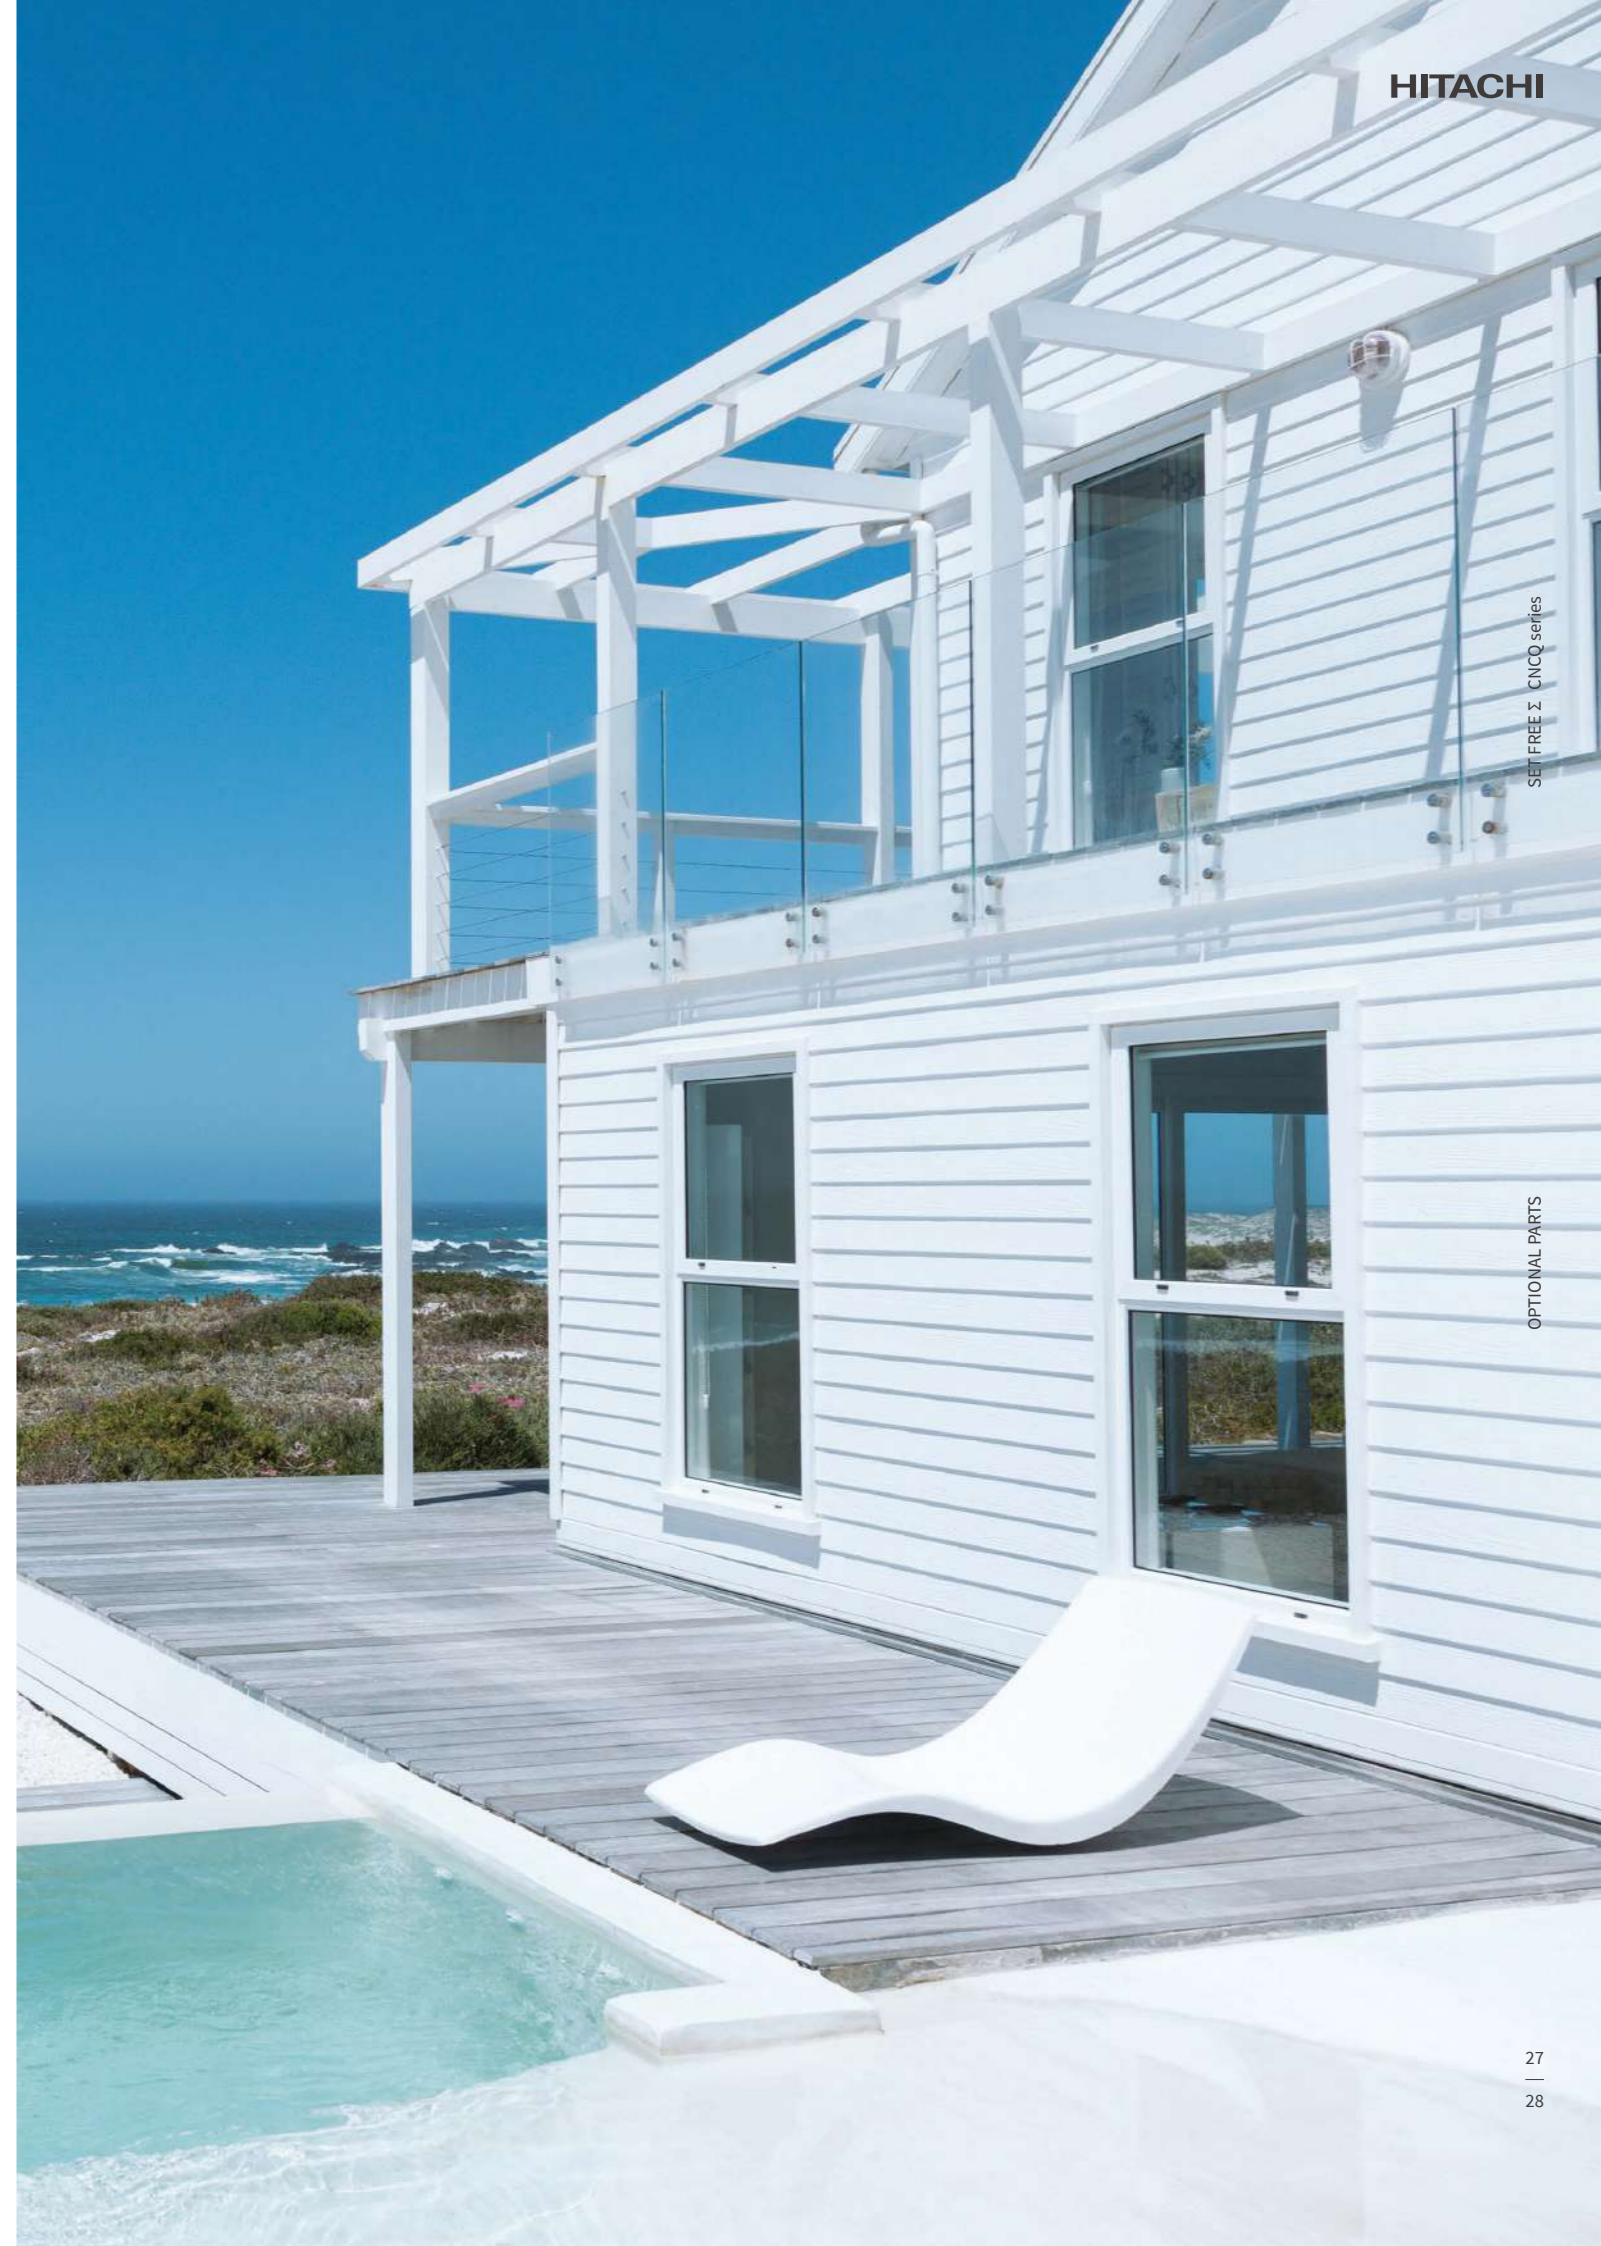

SET FREE Σ CNCQ series

OPTIONAL PARTS

# Indoor life

At work or at home, you want to be in control of your indoor environment. Of course that environment can take many forms, so the new SET FREE  $\Sigma$  range offers you the widest choice of indoor units, with the versatility to complement any interior. Named after the distinctive shape of its patented heat exchanger, SET FREE  $\Sigma$  is a next generation VRF system, setting new standards in power, reliability and efficiency. From small spaces to the largest buildings, you can create your own living harmony.





# LINE UP OVERVIEW

## COMPARING INDOOR UNITS CAPACITY

IDU Category	kW (Cooling)																			
	1.6	2.2	2.8	3.6	4.0	4.3	5.0	5.6	6.3	7.1	7.4	8.0	8.4	9.0	11.0	14.0	14.2	16.0	22.4	28.0
<b>CEILING CASSETTE</b>																				
4-WAY CASSETTE TYPE			●		●			●		●		●			●	●		●		
4-WAY CASSETTE COMPACT TYPE	●	●	●		●			●		●										
2-WAY CASSETTE TYPE		●	●		●			●		●		●			●	●		●		
1-WAY CASSETTE TYPE		●	●		●			●		●		●								
<b>DUCTED</b>																				
HIGH ESP TYPE													●	●	●		●	●	●	●
MEDIUM ESP TYPE		●	●	●		●	●	●	●	●									●	●
LOW ESP TYPE		●	●	●		●	●	●	●	●			●	●	●		●	●		
SLIM TYPE		●	●	●		●														
COMPACT TYPE (BOTH AC MOTOR TYPE AND DC MOTOR TYPE AVAILABLE)		●	●	●		●	●	●	●	●										
<b>OTHERS</b>																				
FLOOR CONCEALED TYPE			●		●			●		●										
FLOOR / CEILING CONVERTIBLE TYPE										●	●	●		●	●	●		●		
CEILING SUSPENDED TYPE					●			●		●		●			●	●		●		
WALL MOUNTED TYPE		●	●	●	●		●	●	●	●		●			●					

## COMPARING VENTILATIONS CAPACITY

Fan Air Flow Rate (m³/h)	200	300	400	500	650	800	1,000	1,080	1,250	1,500	1,680	2,000	2,100	2,500	3,000	4,000	5,000	6,000
<b>ALL FRESH AIR UNIT</b>									●		●		●		●	●	●	●
<b>TOTAL HEAT EXCHANGER</b>	●	●	●	●	●	●	●		●	●		●		●	●	●	●	

## KEY INFORMATION

### CEILING CASSETTE



#### 4-WAY CASSETTE TYPE

- With area of air distribution with 4 direction of louvers (distribution with distance available with optional parts (duct flange))
- Motion sensor available for better energy saving operation
- Individual four-way louvers for greater comfort for individual users
- Ideal for a higher ceiling location for installation (up to 5.5m in cooling mode)

#### 4-WAY CASSETTE COMPACT TYPE

- Dimensions correspond with 600mm x 600mm architectural module ceiling design specifications
- Quiet operation level (as low as 24.5 dB(A))
- Wide range of air flow rate ideal for high ceiling installation with 4.6m air blow down in cooling mode

#### 2-WAY CASSETTE TYPE

- Motion sensor available for better energy saving operation
- Ideal for a higher ceiling location for installation (up to 4.6m in cooling mode)
- Individual louvers operation for greater comfort for individual users
- Quiet operation level (as low as 27dB(A))

#### 1-WAY CASSETTE TYPE

- Motion sensor available for better energy saving operation
- Optimum air flow conditions are created by either downward air discharge or frontal air discharge (via optional grille) or a combination of both
- Quiet operation level (as low as 27dB(A))

### DUCTED



#### HIGH ESP TYPE

- High ESP (90/120Pa for 3.0-6.0 HP class, 180Pa for 8.0-10.0 HP class)
- Space saving design thanks to a height of only 300mm (3.0 - 6.0 HP class) or 470mm (8.0-10.0HP class)

#### MEDIUM ESP TYPE

- 2 steps of medium ESP (50/80Pa for 0.8- 2.5 HP class, 100Pa for 8.0-10.0 HP class)
- Space saving design thanks to a height of only 270mm (0.8 - 2.5HP class) or 470mm (8.0 - 10.0HP class)

#### LOW ESP TYPE

- Low ESP (30Pa for 0.8-2.5 HP class, 60Pa for 3.0-6.0 HP class)
- Space saving design thanks to a height of only 270mm (0.8-2.5HP class) or 350mm (3.0-6.0HP class)

#### SLIM TYPE

- Ideal for narrow ceiling voids installation thanks to low height up to 192mm & width just 700mm
- Drain-pump with 900mm lift as standard optional part
- Quiet operation level (as low as 22 dB(A))

#### COMPACT TYPE (BOTH AC MOTOR TYPE AND DC MOTOR TYPE AVAILABLE)

- Ideal for installation over the closet or windows thanks to the up to the compactness with 192mm height
- Drain-pump with 900mm lift as standard optional part
- Quiet operation level (as low as 21dB(A))
- Fan air flow rate up to 6 taps (DC motor model only)

### CONCEALED & EXPOSED



#### FLOOR CONCEALED TYPE

- Visual aesthetics: it can be hidden away even when there is no ceiling void. Little installation space required thanks to only 220mm depth
- Height just up to 620mm, suitable for installation beneath the window.

#### FLOOR/CEILING CONVERTIBLE TYPE

- Fully [Floor mounted] or [Ceiling suspended] installation convertible
- Easy installation
- Fresh air-intake design
- Optional drain pump available

#### CEILING SUSPENDED TYPE

- Ideal for a higher ceiling location for installation (up to 5.6m in cooling)
- Better power-saving with optional Motion Sensor
- Quiet operation level (as low as 28dB(A))

#### WALL MOUNTED TYPE

- Simple installation procedure
- Flexible discreet design suitable to any interior

### VENTILATIONS



#### ALL FRESH AIR UNIT

- Creates a comfortable and healthy indoor environment thanks to introducing fresh air function and cool function
- Various controllers can be selected and interfaced with the H-LINK system
- Longer ducts can be connected on-site, thanks to the higher ESP

#### TOTAL HEAT EXCHANGER

- Creates a healthy indoor environment thanks to introducing fresh air function and ventilation function
- Remote controller for Total Heat Exchanger is equipped in unit as standard part

# LINE UP OVERVIEW

## FEATURES COMPARISON

Model	4-WAY CASSETTE TYPE	4-WAY CASSETTE COMPACT TYPE	2-WAY CASSETTE TYPE	1-WAY CASSETTE TYPE	HIGH/MEDIUM/LOW ESP TYPE	(8/10HP class) HIGH/MEDIUM ESP TYPE	SLIM TYPE	COMPACT TYPE (AC)	COMPACT TYPE (DC)	FLOOR CONCEALED TYPE	FLOOR/CEILING CONVERTIBLE TYPE	CEILING SUSPENDED TYPE	WALL MOUNTED TYPE	
	RCI-FSKDNQ	RCIM-FSN4	RCD-FSN3	RCS-FSN	RPIH-HNAUNQ RPIM-HNAUNQ RPIL-HNAUNQ	RPI-FSNQ RPI-FSN3Q	RPIZ-FSNQS/P	RPIZ-HNATNQ	RPIZ-HNDTSQ	RPFI-FSNQ	RPFC-FSNQ	RPC-FSN3	RPK-FSNQS RPK-FSN4M	
<b>Temperature Setting Rate</b>	°C(0.5/1)_°F(1)	°C(0.5/1)_°F(1)	°C(0.5/1)_°F(1)	°C(0.5/1)_°F(1)	1°C/1°F	1°C/1°F	1°C/1°F	1°C/1°F	1°C/1°F	1°C/1°F	1°C/1°F	°C(0.5/1)_°F(1)	1°C/1°F	°C(0.5/1)_°F(1)
<b>Indoor Fan Speed</b>	4 taps	4 taps	4 taps	4 taps	3 taps	1 tap	3 taps	3 taps	6 taps	3 taps	3 taps	4 taps	3 taps	4 taps
<b>Louver Direction</b>	7 (*4)	7 (*4)	7 (*4)	7 (*5)	-	-	-	-	-	-	7 (*5)	7 (*5)	7 (*5)	7 (*5)
<b>Individual Louver Setting</b>	●	●	●	-	-	-	-	-	-	-	-	-	-	-
<b>Auto Louver Setting</b>	●	●	●	●	-	-	-	-	-	-	●	●	●	●
<b>Cold Draft Prevention Availability (*1)</b>	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>Dry mode Availability</b>	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>Power Saving with Motion Sensor</b>	●	●	●	●	-	-	-	-	-	-	-	●	-	-
<b>Outdoor Unit capacity control</b>	Peak cut control	●	●	●	-	-	-	-	-	-	-	●	-	●
	moderate control	●	●	●	-	-	-	-	-	-	-	●	-	●
<b>Indoor Unit Rotation Control</b>	Indoor Unit Address	●	●	●	●	-	-	-	-	-	-	●	-	●
	Indoor Air Temperature difference	●	●	●	●	-	-	-	-	-	-	●	-	●
<b>Automatic Fan Operation</b>	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>Quick Function</b>	●	●	●	●	-	-	-	-	-	-	-	●	-	●
<b>Comfort setting</b>	Control Cool Air	●	●	●	●	-	-	-	-	-	-	●	-	●
	Daylight Saving Time	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>Power Consumption visualization</b>	●	●	●	●	-	-	-	-	-	-	-	●	-	●
<b>Weekly Schedule Setting</b>	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>Power-Saving Setting</b>	●	●	●	●	-	-	-	-	-	-	-	●	-	●
<b>Dirty Filter Notice Availability</b>	●	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>Check Menu</b>	Sensor Condition Check (*9)	●	●	●	●	●	●	●	●	●	●	●	●	●
	Model Display (*2)	-	-	●	●	-	-	-	-	-	-	●	-	●
	Indoor / Outdoor PCB Check (*2)	●	●	●	●	●	●	●	●	●	●	●	●	●
	Alarm History Display (*9)	●	●	●	●	●	●	●	●	●	●	●	●	●
<b>Colored Decoration Panel availability</b>	-	-	●(*6)	●(*6)	-	-	-	-	-	-	-	-	-	-
<b>Motion Sensor</b>	PS-MSK2	SOR-NEC	SOR-NED	SOR-NES	-	-	-	-	-	-	-	SOR-NEP	-	-
<b>Receiver Kit for wireless remote controller</b>	HR4A10NEWQ PC-ALH3	PC-ALHC1	PC-ALHD1	PC-ALHS1	PC-RLH11 PC-ALHZ1	PC-RLH11 PC-ALHZ1	PC-RLH11 PC-ALHZ1	PC-RLH11 PC-ALHZ1	PC-RLH11 PC-ALHZ1	PC-RLH11 PC-ALHZ1	PC-RLH11 (*10) PC-ALHZ1	PC-ALHP1	PC-RLH11 (*10) PC-ALHZ1	PC-ALHZ1 (*11)
<b>Drain-up mechanism availability</b>	●(*3)	●(*3)	●(*3)	●(*3)	DUPI-131Q DUPI-361Q	DUPI-15H2Q	●(*3)	●(*3)	●(*3)	-	-	DUPC-63K1 DUPC-71K1 DUPC-160K1	-	●(*8)
<b>Fresh air intake design</b>	●(*7)	●(*7)	●(*7)	●(*7)	-	-	-	-	-	-	-	●(*7)	-	-
<b>Air filter</b>	●(*8)	●(*8)	●(*8)	●(*8)	KW-PP7/8/9/10Q	-	-	KW-PP5Q KW-PP6Q	KW-PP5Q KW-PP6Q	●(*8)	●(*8)	●(*8)	●(*8)	●(*8)
<b>Strainer kit</b>	-	-	-	-	-	-	-	-	-	-	-	-	MSF-NP63A1	MSF-NP63A1 MSF-NP112A1

(\*1) This function is utilized to prevent cold discharged air at start-up of heating operation, after defrosting operation, etc. The fan speed automatically switches from Slow to Low and then to the set fan speed. The fan operation might be stopped for up to 2 minutes. At this time the louver is fixed horizontally.  
 (\*2) Advanced wired remote controller PC-ARF1 needs to be connected.  
 (\*3) included as standard equipment  
 (\*4) 7 steps are available by individual louver setting. 5 steps only in the operation of Cooling or Dry.  
 (\*5) 5 steps only in the operation of Cooling or Dry.


(\*6) 3 colors available except white (Beige, Grey and Black)  
 (\*7) Optional parts: Duct Adapter is available. please consult your distributor.  
 (\*8) Please consult your distributor for the availability.  
 (\*9) PC-ARF1 or HCWA10NEGQ needs to be connected.  
 (\*10) Standard Receiver kit (PC-RLH11) is equipped with the unit in package as standard optional part with Wireless Remote Controller (PC-LH3A)  
 (\*11) Receiver Kit is installed in the unit as standard part. Please use Receiver Kit (PC-ALHZ1) when receiver kit needs to be installed separately from unit.

# 4-WAY CASSETTE TYPE




## DIMENSIONS

- RCI-1.0 FSKDNQ **20kg**
- RCI-1.5~2.0 FSKDNQ **21kg**
- RCI-2.5 FSKDNQ **22kg**
- Decoration panel **6.5kg**



- RCI-3.0~6.0 FSKDNQ **26kg**
- Decoration panel **6.5kg**




## FEATURES AND BENEFITS

### Adaptability

#### 1) Wide Detection area of motion sensor(PS-MSK2)


(optional part) to achieve better energy-saving

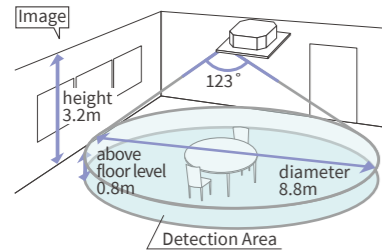

\* Motion sensor detecting area dimension  
 7.0m = 1.0-3.0FSKDNQ  
 8.8m = 4.0-6.0FSKDNQ  
 \* in case of use of PC-ARF1 (Advanced wired controller)


#### 2) Control air flow with individual four-way louvers

more comfortable air conditioning can be achieved along each zone requirement

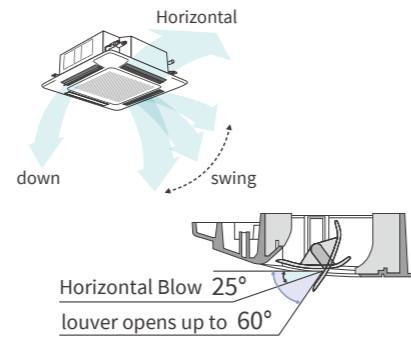

### Design Flexibility

#### Suitable for high ceiling space (e.g. Car showroom space!)

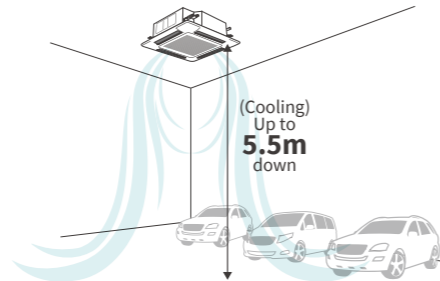

\* Air flow rate: HI2  
 \* 4.0-6.0 FSKDNQ



## Model

	RCI-1.0FSKDNQ	RCI-1.5FSKDNQ	RCI-2.0FSKDNQ	RCI-2.5FSKDNQ	RCI-3.0FSKDNQ	RCI-4.0FSKDNQ	RCI-5.0FSKDNQ	RCI-6.0FSKDNQ		
<b>Indoor Unit Power Supply</b>	AC 1Φ, [220-240V/50Hz]									
<b>Nominal Capacity</b>	<b>Cooling</b>	<b>kW</b>	2.8	4.0	5.6	7.1	8.0	11.2	14.0	16.0
<b>Sound Pressure Level</b>	<b>(Hi2/Hi/Me/Lo)</b>	<b>dB(A)</b>	33/30/28/27	35/31/30/27	37/32/30/27	42/36/32/28	42/36/32/28	48/43/39/33	48/45/40/35	48/46/41/37
<b>Outer Dimension</b>	<b>(H×W×D)</b>	<b>mm</b>	238×840×840	238×840×840	238×840×840	238×840×840	288×840×840	288×840×840	288×840×840	288×840×840
<b>Net Weight</b>		<b>kg</b>	20	21	21	22	26	26	26	26
<b>Refrigerant</b>			R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
<b>Indoor Fan Air Flow Rate</b>	<b>(Hi2/Hi/Me/Lo)</b>	<b>m³/min</b>	15/13/11/9	21/17/14/11	22/17/14/11	27/23/18/14	27/23/18/14	37/31/24/20	37/33/26/21	37/35/28/22
<b>Motor</b>		<b>W</b>	57	57	57	57	57	127	127	127
<b>Connections</b>			Flare-Nut Connection (with flare Nuts)							
<b>Refrigerant Piping Diameter</b>	<b>Liquid Line</b>	<b>mm</b>	Φ6.35	Φ6.35	Φ6.35	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52
	<b>Gas Line</b>	<b>mm</b>	Φ12.7	Φ12.7	Φ12.7	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88
<b>Condensate Drain</b>			VP25	VP25	VP25	VP25	VP25	VP25	VP25	VP25
<b>Approximate Packing Volume</b>		<b>m³</b>	0.26	0.26	0.26	0.26	0.31	0.31	0.31	0.31

## Adaptable Panel Model

Included (without Motion Sensor)

<b>Color</b>	Neutral White	
<b>Outer Dimension</b>	<b>(H×W×D)</b>	<b>mm</b>
<b>Net Weight</b>		<b>kg</b>
<b>Approximate Packing Volume</b>		<b>m³</b>

**NOTE:**

1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.

Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre


2. The sound pressure level is based on following conditions.  
 1.5 metre Beneath the Unit.  
 The data in the table above was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

# 4-WAY CASSETTE COMPACT TYPE



## DIMENSIONS

- RCIM-0.6~1.5 FSN4 **16kg**
- RCIM-2.0~2.5 FSN4 **17kg**
- P-AP56NAM **3kg**



## FEATURES AND BENEFITS

### Adaptability

Top-class silent operation  
as quiet as gentle breeze




IDU Capacity HP(Class)	0.6	0.8	1	1.5	2	2.5
Sound pressure level (dB(A))	24.5	24.5	24.5	27.5	31	35

\*Air flow rate: Lo




### Design Flexibility

1) Compact

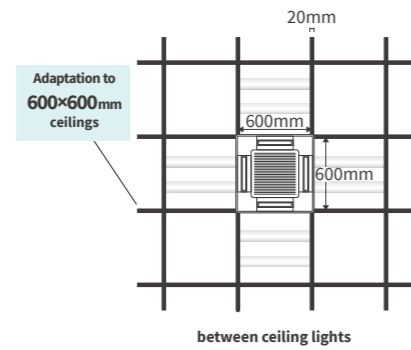

2) Suitable for high ceiling space  
• Standard drain-pump with 850mm lift

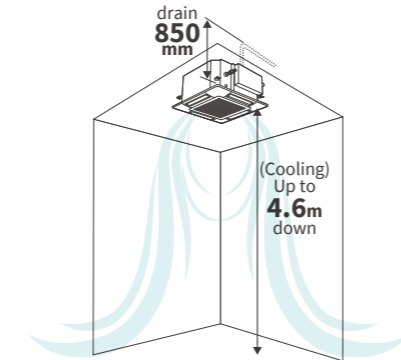

\* Air flow rate: Hi2  
\* 2.0-2.5 FSN4



## Model

	RCIM-0.6FSN4	RCIM-0.8FSN4	RCIM-1.0FSN4	RCIM-1.5FSN4	RCIM-2.0FSN4	RCIM-2.5FSN4	
Indoor Unit Power Supply		AC 1Φ [220-240V 50Hz]					
Nominal Capacity	Cooling kW	1.6	2.2	2.8	4.0	5.6	7.1
Sound Pressure Level	(Hi2/Hi/Me/Lo) dB(A)	34/30/28/24.5	36/33/29/24.5	38/34/30/24.5	41/37/33/27.5	45/39/35/31	47/43/39/35
Outer Dimension	(H×W×D) mm	280×570×570	280×570×570	280×570×570	280×570×570	280×570×570	280×570×570
Net Weight	kg	16	16	16	16	17	17
Refrigerant		R410A	R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi2/Hi/Me/Lo) m³/min	10/8.5/7.5/6	11/9.5/8/6	12/10/8.5/6	13/11/9.5/7	15/12/10/8	16/14/12/10
Motor	W	57	57	57	57	57	57
Connections		Flare-Nut Connection (with Flare Nuts)					
Refrigerant Piping Diameter	Liquid Line mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.52
	Gas Line mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.88
Condensate Drain		VP25	VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume	m³	0.13	0.13	0.13	0.13	0.13	0.13

## Adaptable Panel Model

P-AP56NAM (without Motion Sensor)

Color	Neutral White					
Outer Dimension (H×W×D) mm	30×620×620					
Net Weight kg	3.0					
Approximate Packing Volume m³	0.04					

### NOTE:

1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.

Cooling Operation Conditions	
Indoor Air Inlet Temperature:	27°C DB (80°F DB) 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature:	35°C DB (95°F DB)
Piping Length:	7.5 metre
Piping Lift:	0 metre

2. The sound pressure level is based on following conditions.  
1.5 metre Beneath the Unit.

The data in the table above was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

## 2-WAY CASSETTE TYPE



### DIMENSIONS



RCD-0.8~1.0 FSN3 **23kg**

RCD-1.5~3.0 FSN3 **25kg**

P-AP90DNA **7.5kg**

RCD-4.0~6.0 FSN3 **39kg**

P-AP160DNA **10.5kg**




### FEATURES AND BENEFITS

#### Adaptability


##### 1) Wide Detection area of motion sensor (SOR-NED)

(optional part) to achieve better energy-saving

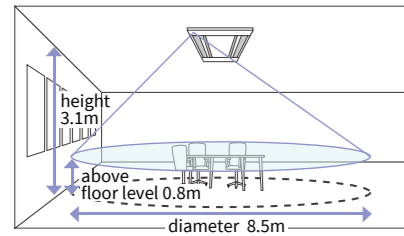


##### 2) Control air flow with individual louvers

suitable environment can be achieved for each person

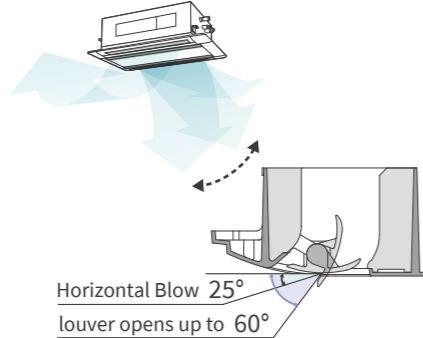

#### Design Flexibility

- Suitable for high ceiling space
- Standard drain-pump with 850mm lift

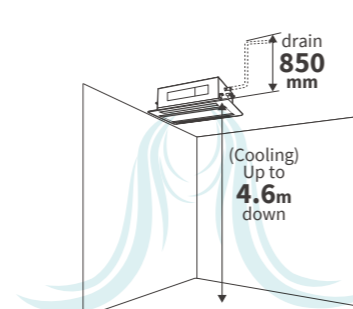

\* Air flow rate: Hi2  
\* 2.0-6.0 FSN3



### Model

RCD-0.8FSN3 RCD-1.0FSN3 RCD-1.5FSN3 RCD-2.0FSN3 RCD-2.5FSN3 RCD-3.0FSN3 RCD-4.0FSN3 RCD-5.0FSN3 RCD-6.0FSN3

#### Indoor Unit Power Supply

AC 1Φ, [220-240V/50Hz]

Nominal Capacity	Cooling	kW	2.2	2.8	4.0	5.6	7.1	8.0	11.2	14.0	16.0
Sound Pressure Level	(Hi2/Hi/Me/Lo)	dB(A)	30/29/28/27	31/29/28/27	37/34/31/30	39/36/33/30	42/39/36/33	45/42/38/33	43/40/37/34	47/44/41/35	48/45/42/39
Outer Dimension	(H×W×D)	mm	298×860×630	298×860×630	298×860×630	298×860×630	298×860×630	298×860×630	298×1,420×630	298×1,420×630	298×1,420×630
Net Weight		kg	23	23	25	25	25	25	39	39	39
Refrigerant			R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi2/Hi/Me/Lo)	m <sup>3</sup> /min	10/9/7.5/6.5	11/9.5/8.5/7	15/13/11.5/10	16.5/14.5/12.5/10.5	18.5/16.5/14.5/12.5	21/18.5/16/12.5	30/26.5/23/20	35/31/27/21	37/32.5/28.5/24
Motor		W	57	57	57	57	57	57	57 x 2	57 x 2	57 x 2
Connections			Flare-Nut Connection (with Flare Nuts)								
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52
	Gas Line	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88
Condensate Drain			VP25	VP25	VP25	VP25	VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.24	0.24	0.24	0.24	0.24	0.24	0.36	0.36	0.36

#### Adaptable Panel Model

P-AP90DNA (for RCD- [0.8-3.0] FSN3)

P-AP160DNA (for RCD- [4.0-6.0] FSN3)

Color		Neutral White	Neutral White	
Outer Dimension	(H×W×D)	mm	30×1,100×710	30×1,660×710
Net Weight		kg	7.5	10.5
Approximate Packing Volume		m <sup>3</sup>	0.13	0.20

#### NOTE:

1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.

Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions.

1.5 metre Beneath the Unit.  
 The data in the table above was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

# 1-WAY CASSETTE TYPE



## DIMENSIONS

RCS-0.8~1.0 FSN	25kg	
RCS-1.5~2.0 FSN	26kg	
P-AP36CNA	4.5kg	
P-AP56CNA	4.5kg	
RCS-2.5~3.0 FSN	33kg	
P-AP80CNA	6kg	

## FEATURES AND BENEFITS


### Adaptability

#### Quiet operation

new design in fan inlet and fan resulted in the low sound pressure

IDU cooling capacity (kW)	2.2	2.8	4.0	5.6	7.1	8.0
Sound Pressure Level (dB(A))	27	28	31	31	32	33

\*Air flow rate: Lo



### Design Flexibility

#### 1) 3 installation types selectable


##### Corner type (standard)

allows for ceiling planning for lighting and interiors, suitable for installation in the perimeter zone near the window




##### Clipped ceiling (one-way) type

suitable for design that focuses on lighting and clipped ceilings, in case the unit is unable to be directly embedded in the ceiling




##### Clipped ceiling (two-way) type

provides increased comfort through two-direction airflow by utilizing the advantages of installation on a clipped ceiling. Room temperature distribution can be improved by both forward airflow and downward airflow



#### 2) Suitable for high ceiling space

• Standard drain-pump with 850mm lift



\*Air flow rate: Hi2  
\*2.5-3.0FSN3  
\*standard corner type



## Model

	RCS-0.8FSN	RCS-1.0FSN	RCS-1.5FSN	RCS-2.0FSN	RCS-2.5FSN	RCS-3.0FSN		
Indoor Unit Power Supply	AC 1Φ, [220-240V/50Hz]							
Nominal Capacity	Cooling	kW	2.2	2.8	4.0	5.6	7.1	8.0
Sound Pressure Level	(Hi2/Hi/Me/Lo)	dB(A)	34/32/29/27	36/34/31/28	40/37/33/31	42/38/35/31	43/39/36/32	43/40/37/33
Outer Dimension	(H×W×D)	mm	235×900×720	235×900×720	235×900×720	235×900×720	235×1,210×720	235×1,210×720
Net Weight		kg	25	25	26	26	33	33
Refrigerant			R410A	R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi2/Hi/Me/Lo)	m³/min	8.5/7.5/6.5/6	9.5/8.5/7.5/6.5	13/11.5/10/8.5	14.5/13/11/9.5	18.5/16.5/14.5/12.5	20/17.5/15.5/13
Motor		W	50	50	50	50	80	80
Connections			Flare-Nut Connection (with Flare Nuts)					
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.52	Φ9.52
	Gas Line	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.88	Φ15.88
Condensate Drain			VP25	VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m³	0.25	0.25	0.25	0.25	0.32	0.32

## Adaptable Panel Model

	P-AP36CNA (for RCS-[0.8-1.0]FSN)	P-AP56CNA (for RCS-[1.5-2.0]FSN)	P-AP80CNA (for RCS-[2.5-3.0]FSN)
Color	Neutral White		
Outer Dimension	(H×W×D) mm	35×1,100×800	35×1,410×800
Net Weight	kg	4.5	6.0
Approximate Packing Volume	m³	0.098	0.125

### NOTE:

1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.

Cooling Operation Conditions	
Indoor Air Inlet Temperature:	27°C DB (80°F DB) 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature:	35°C DB (95°F DB)
Piping Length:	7.5 metre
Piping Lift:	0 metre

2. The sound pressure level is based on following conditions.

1.5 metre Beneath the Unit.  
The data in the table above was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

DUCTED



Type	HIGH ESP TYPE		MEDIUM ESP TYPE		LOW ESP TYPE		SLIM TYPE		COMPACT TYPE (AC MOTOR / DC MOTOR)	
Model	RPIH-(3.0~6.0)HNAUNQ RPI-(8.0~10.0)FSNQ		RPIM-(0.8~2.5)HNAUNQ RPI-(8.0~10.0)FSN3Q		RPLI-(0.8~6.0)HNAUNQ		RPIZ-(0.8~1.5)FSNQS/P		RPIZ-(0.8~2.5)HNATNQ RPIZ-(0.8~2.5)HNDSQ	
Capacity	Cooling	kW	8.4 - 28.0	2.2 - 28.0	2.2 - 16.0	2.2 - 4.3	2.2 - 7.1			
	Height	mm	300 - 470	270 - 470	270 - 300	192	192			
Dimensions	Width	mm	1,060 - 1,475	725 - 1,250	725-1,475	700	700 - 1,180			
	Depth	mm	800 - 1,120	720 - 1,120	720-800	602	447			
Net Weight		kg	45 - 104	24 - 106	24 - 54	21	17 - 28			

FEATURES AND BENEFITS

HIGH ESP / MEDIUM ESP / LOW ESP TYPE

Design Flexibility

High ESP type

- High ESP (90/120Pa for 3.0-6.0 HP class, 180Pa for 8.0-10.0 HP class)
- Space saving design thanks to a height of only 300mm (3.0 - 6.0 HP class) or 470mm (8.0-10.0HP class)

Medium ESP type

- 2 steps of medium ESP (50/80Pa for 0.8- 2.5 HP class, 100Pa for 8.0-10.0 HP class)
- Space saving design thanks to a height of only 270mm (0.8 - 2.5HP class) or 470mm (8.0 - 10.0HP class)

Low ESP type

- Low ESP (30Pa for 0.8-2.5 HP class, 60Pa for 3.0-6.0 HP class)
- Space saving design thanks to a height of only 270mm (0.8-2.5HP class) or 350mm (3.0-6.0HP class)

SLIM / COMPACT TYPE

Design Flexibility

Slim type

- Ideal for narrow ceiling voids installation thanks to low height up to 192mm & width just 700mm
- Drain-pump with 900mm lift as standard optional part
- Quiet operation level (as low as 22dB(A))

Compact type

- Ideal for installation over the closet or windows thanks to the up to the compactness with 192mm height
- Drain-pump with 900mm lift as standard optional part
- Quiet operation level (as low as 21dB(A))
- Fan air flow rate up to 6 taps (DC motor model only)

HIGH ESP (EXTERNAL STATIC PRESSURE) TYPE

Model			RPIH-3.0HNAUNQ	RPIH-3.3HNAUNQ	RPIH-4.0HNAUNQ	RPIH-5.0HNAUNQ	RPIH-6.0HNAUNQ
Indoor Unit Power Supply			AC 1 Φ, [220-240V/50Hz]				
Nominal Capacity	Cooling	kW	8.4	9.0	11.2	14.2	16.0
	Sound Pressure Level	(Hi/Me/Lo) dB(A)	42/39/34	42/39/34	43/39/34	44/41/37	48/42/37
Outer Dimension	(H×W×D)	mm	300×1,175×800	300×1,175×800	300×1,175×800	300×1,475×800	300×1,475×800
Net Weight		kg	45	45	45	53	54
Refrigerant			R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi/Me/Lo)	m <sup>3</sup> /min	30/28/23	30/28/23	30/28/23	35.5/32/27	41/33/26
External Static Pressure *3)		Pa	120(90)	120(90)	120(90)	120(90)	120(90)
Connections			Flare-Nut Connection (with Flare Nuts)				
Refrigerant Piping Diameter	Liquid Line	mm	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52
	Gas Line	mm	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88
Condensate Drain			VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.40	0.40	0.40	0.49	0.49

Model			RPI-8.0FSNQ	RPI-10.0FSNQ
Indoor Unit Power Supply			AC 3 Φ, [380-415V/50Hz]	
Nominal Capacity	Cooling	kW	22.4	28.0
	Sound Pressure Level	dB(A)	50	52
Outer Dimension	(H×W×D)	mm	470×1,060×1,120	470×1,250×1,120
Net Weight		kg	96	104
Refrigerant			R410A	R410A
Indoor Fan Air Flow Rate		m <sup>3</sup> /min	58	72
External Static Pressure *3)		Pa	180	180
Connections			Brazing	
Refrigerant Piping Diameter	Liquid Line	mm	Φ9.52	Φ9.52
	Gas Line	mm	Φ19.05	Φ22.23
Condensate Drain			VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.90	1.06

NOTE:

1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.

Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions.

1.4 metre Beneath the Unit.  
 With Discharge Duct (2.0 metre) and Return Duct (1.0 metre).  
 Voltage of the power source for the indoor fan motor is 220V.  
 (In case of the power source of 240V, the sound pressure level increases by about 1~2dB(A).)  
 The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

3. The data for external pressure (\*3) indicates "Standard Pressure Setting values when a filter is not used.

# MEDIUM ESP (EXTERNAL STATIC PRESSURE) TYPE

Model			RPIM-0.8HNAUNQ	RPIM-1.0HNAUNQ	RPIM-1.3HNAUNQ	RPIM-1.5HNAUNQ	RPIM-1.8HNAUNQ
Indoor Unit Power Supply			AC 1 Φ, [220-240V/50Hz]				
Nominal Capacity	Cooling	kW	2.2	2.8	3.6	4.3	5.0
Sound Pressure Level	(Hi/Me/Lo)	dB(A)	32/27/24	32/27/24	35/33/28	35/33/28	35.5/33/28
Outer Dimension	(H×W×D)	mm	270×725×720	270×725×720	270×725×720	270×725×720	270×975×720
Net Weight		kg	24	24	25	25	31
Refrigerant			R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi/Me/Lo)	m <sup>3</sup> /min	10/8/7	10/8/7	12/11/9	12/11/9	16/14/11.5
External Static Pressure *3)		Pa	50(80)	50(80)	50(80)	50(80)	50(80)
Connections			Flare-Nut Connection (with Flare Nuts)				
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35
	Gas Line	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.88
Condensate Drain			VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.22	0.22	0.22	0.22	0.28

Model			RPIM-2.0HNAUNQ	RPIM-2.3HNAUNQ	RPIM-2.5HNAUNQ	RPI-8.0FSN3Q	RPI-10.0FSN3Q
Indoor Unit Power Supply			AC 1 Φ, [220-240V/50Hz]				AC 3 Φ, [380-415V/50Hz]
Nominal Capacity	Cooling	kW	5.6	6.3	7.1	22.4	28.0
Sound Pressure Level	(Hi/Me/Lo)	dB(A)	35.5/33/28	39/34/26	39/34/26	50	52
Outer Dimension	(H×W×D)	mm	270×975×720	270×975×720	270×975×720	470×1,060×1,120	470×1,250×1,120
Net Weight		kg	31	32	32	96	104
Refrigerant			R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi/Me/Lo)	m <sup>3</sup> /min	16/14/11.5	20/16/11.5	20/16/11.5	58(56*)	72(70*)
External Static Pressure *3)		Pa	50(80)	50(80)	50(80)	100	100
Connections			Flare-Nut Connection (with Flare Nuts)			Brazing	
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ9.52	Φ9.52	Φ9.52	Φ9.52
	Gas Line	mm	Φ15.88	Φ15.88	Φ15.88	Φ19.05	Φ22.23
Condensate Drain			VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.28	0.28	0.28	0.90	1.06

NOTE:  
 1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre  
 2. The sound pressure level is based on following conditions.  
 1.4 metre Beneath the Unit.  
 With Discharge Duct (2.0 metre) and Return Duct (1.0 metre).  
 Voltage of the power source for the indoor fan motor is 220V.  
 (In case of the power source of 240V, the sound pressure level increases by about 1~2dB(A).)  
 The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.  
 3. The data for external pressure (\*3) indicates "Standard Pressure Setting values when a filter is not used."

# LOW ESP (EXTERNAL STATIC PRESSURE) TYPE

Model			RPIL-0.8HNAUNQ	RPIL-1.0HNAUNQ	RPIL-1.3HNAUNQ	RPIL-1.5HNAUNQ	RPIL-1.8HNAUNQ	RPIL-2.0HNAUNQ	RPIL-2.3HNAUNQ
Indoor Unit Power Supply			AC 1 Φ, [220-240V/50Hz]						
Nominal Capacity	Cooling	kW	2.2	2.8	3.6	4.3	5.0	5.6	6.3
Sound Pressure Level	(Hi/Me/Lo)	dB(A)	28/25/22	28/25/22	34/32/30	34/32/30	34/32/29	34/32/29	36.5/30.5/25
Outer Dimension	(H×W×D)	mm	270×725×720	270×725×720	270×725×720	270×725×720	270×975×720	270×975×720	270×975×720
Net Weight		kg	24	24	25	25	31	31	32
Refrigerant			R410A	R410A	R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi/Me/Lo)	m <sup>3</sup> /min	9/8/7	9/8/7	13/11/9	13/11/9	15/14/12	15/14/12	21/17/11
External Static Pressure (*3)		Pa	30	30	30	30	30	30	30
Connections			Flare-Nut Connection (with Flare Nuts)						
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.52
	Gas Line	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.88	Φ15.88	Φ15.88
Condensate Drain			VP25	VP25	VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.22	0.22	0.22	0.22	0.28	0.28	0.28

Model			RPIL-2.5HNAUNQ	RPIL-3.0HNAUNQ	RPIL-3.3HNAUNQ	RPIL-4.0HNAUNQ	RPIL-5.0HNAUNQ	RPIL-6.0HNAUNQ
Indoor Unit Power Supply			AC 1 Φ, [220-240V/50Hz]					
Nominal Capacity	Cooling	kW	7.1	8.4	9.0	11.2	14.2	16.0
Sound Pressure Level	(Hi/Me/Lo)	dB(A)	36.5/30.5/25	38/30/24	38/30/24	38/35/31	44/39/35	46/41/35
Outer Dimension	(H×W×D)	mm	270×975×720	300×1,175×800	300×1,175×800	300×1,175×800	300×1,475×800	300×1,475×800
Net Weight		kg	32	45	45	45	53	54
Refrigerant			R410A	R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi/Me/Lo)	m <sup>3</sup> /min	21/17/11	29/25/21	29/25/21	29/25/21	36/31/26	42/34/26
External Static Pressure (*3)		Pa	30	60	60	60	60	60
Connections			Flare-Nut Connection (with Flare Nuts)					
Refrigerant Piping Diameter	Liquid Line	mm	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52
	Gas Line	mm	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88
Condensate Drain			VP25	VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.28	0.40	0.40	0.40	0.49	0.49

NOTE:  
 1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre  
 2. The sound pressure level is based on following conditions.  
 1.4 metre Beneath the Unit.  
 With Discharge Duct (2.0 metre) and Return Duct (1.0 metre).  
 Voltage of the power source for the indoor fan motor is 220V.  
 (In case of the power source of 240V, the sound pressure level increases by about 1~2dB(A).)  
 The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.  
 3. The data for external pressure (\*3) indicates "Standard Pressure Setting values when a filter is not used."

SET FREE Σ CNCQ series

DUCTED



# SLIM TYPE

Model			RPIZ-0.8FSNQS/P	RPIZ-1.0FSNQS/P	RPIZ-1.3FSNQS/P	RPIZ-1.5FSNQS/P
Indoor Unit Power Supply			AC 1Φ, [220-240V/50Hz]			
Nominal Capacity	Cooling	kW	2.2	2.8	3.6	4.3
Sound Pressure Level	(Hi/Me/Lo)	dB(A)	28/25/22	28/25/22	32/30/28	32/30/28
Outer Dimension	(H×W×D)	mm	192×700×602	192×700×602	192×700×602	192×700×602
Net Weight		kg	21	21	21	21
Refrigerant			R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi/Me/Lo)	m <sup>3</sup> /min	8/7/6	8/7/6	10/8/7	10/8/7
External Static Pressure	Standard (min/max)	Pa	10(10/30)	10(10/30)	10(10/30)	10(10/30)
Connections	Flare-Nut Connection (with Flare Nuts)					
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35
	Gas Line	mm	Φ12.70	Φ12.70	Φ12.70	Φ12.70
Condensate Drain			VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.15	0.15	0.15	0.15

NOTE:  
 1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length:7.5 metre  
 Piping Lift:0 metre  
 2. The sound pressure level is based on following conditions.  
 1.4 metre Beneath the Unit.  
 With Discharge Duct (2.0 metre) and Return Duct (1.0 metre).  
 Voltage of the power source for the indoor fan motor is 220V.  
 (In case of the power source of 240V, the sound pressure level increases by about 1~2dB(A).)  
 The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.  
 3. The data for external pressure (\*3) indicates "Standard Pressure Setting values when a filter is not used.

# COMPACT TYPE (BOTH AC MOTOR TYPE AND DC MOTOR TYPE AVAILABLE)

Model (AC MOTOR)			RPIZ-0.8HNATNQ	RPIZ-1.0HNATNQ	RPIZ-1.3HNATNQ	RPIZ-1.5HNATNQ	RPIZ-1.8HNATNQ	RPIZ-2.0HNATNQ	RPIZ-2.3HNATNQ	RPIZ-2.5HNATNQ
Indoor Unit Power Supply			AC 1Φ, [220-240V/50Hz]							
Nominal Capacity	Cooling	kW	2.2	2.8	3.6	4.0	5.0	5.6	6.3	7.1
Sound Pressure Level	(Hi/Me/Lo)	dB(A)	30/23/20	30/23/20	34/25/22	32.5/26/23	34/26/25	34/26/25	37/29/27	37/29/27
Outer Dimension	(H×W×D)	mm	192×700×447	192×700×447	192×700×447	192×910×447	192×1,180×447	192×1,180×447	192×1,180×447	192×1,180×447
Net Weight		kg	17	17	17	21	27	27	28	28
Refrigerant			R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi/Me/Lo)	m <sup>3</sup> /min	9.5/6.5/5.5	9.5/6.5/5.5	9.5/6.5/5.5	10/7/6	15/10/9	15/10/9	17/10/9	17/10/9
External Static Pressure (*3)		Pa	10(30)	10(30)	10(30)	10(30)	10(30)	10(30)	10(30)	10(30)
Connections	Flare-Nut Connection (with Flare Nuts)									
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.52	Φ9.52
	Gas Line	mm	Φ12.70	Φ12.70	Φ12.70	Φ12.70	Φ15.88	Φ15.88	Φ15.88	Φ15.88
Condensate Drain			VP25	VP25	VP25	VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.142	0.142	0.142	0.15	0.18	0.18	0.18	0.18

Model (DC MOTOR)			RPIZ-0.8HNDSQ	RPIZ-1.0HNDSQ	RPIZ-1.3HNDSQ	RPIZ-1.5HNDSQ	RPIZ-1.8HNDSQ	RPIZ-2.0HNDSQ	RPIZ-2.3HNDSQ	RPIZ-2.5HNDSQ
Indoor Unit Power Supply			AC 1Φ, [220-240V/50Hz]							
Nominal Capacity	Cooling	kW	2.2	2.8	3.6	4.0	5.0	5.6	6.3	7.1
Sound Pressure Level	(6taps)	dB(A)	33/31/28/25/23.5/22.5	33/31/28/25/23.5/22.5	33/31/28/25/23.5/22.5	31/30/28/25/22/20	36/33.5/31/28/24.5/22.5	36/33.5/31/28/24.5/22.5	36/33.5/31/28/24.5/22.5	36/33.5/31/28/24.5/22.5
Outer Dimension	(H×W×D)	mm	192×700×447	192×700×447	192×700×447	192×910×447	192×1,180×447	192×1,180×447	192×1,180×447	192×1,180×447
Net Weight		kg	17	17	17	20	24	24	24	24
Refrigerant			R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(6taps)	m <sup>3</sup> /min	8.5/8/7/6/5.5/5	8.5/8/7/6/5.5/5	8.5/8/7/6/5.5/5	10/9/8/7.5/6.5/6	16.5/15/13/12/10/9	16.5/15/13/12/10/9	16.5/15/13/12/10/9	16.5/15/13/12/10/9
External Static Pressure (*3)		Pa	10(0-10-30)	10(0-10-30)	10(0-10-30)	10(0-10-30)	10(0-10-50)	10(0-10-50)	10(0-10-50)	10(0-10-50)
Connections	Flare-Nut Connection (with Flare Nuts)									
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.52	Φ9.52
	Gas Line	mm	Φ12.70	Φ12.70	Φ12.70	Φ12.70	Φ15.88	Φ15.88	Φ15.88	Φ15.88
Condensate Drain			VP25	VP25	VP25	VP25	VP25	VP25	VP25	VP25
Approximate Packing Volume		m <sup>3</sup>	0.142	0.142	0.142	0.15	0.18	0.18	0.18	0.18


NOTE:  
 1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length:7.5 metre  
 Piping Lift:0 metre  
 2. The sound pressure level is based on following conditions.  
 1.4 metre Beneath the Unit.  
 With Discharge Duct (2.0 metre) and Return Duct (1.0 metre).  
 Voltage of the power source for the indoor fan motor is 220V.  
 (In case of the power source of 240V, the sound pressure level increases by about 1~2dB(A).)  
 The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.  
 3. The data for external pressure (\*3) indicates "Standard Pressure Setting values when a filter is not used.

SET FREE Σ CNCQ series

DUCTED


# FLOOR CONCEALED TYPE

## DIMENSIONS

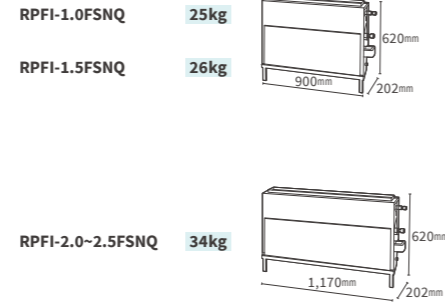

## FEATURES AND BENEFITS

- Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible.
- Its low height (only 620mm) enables the unit to fit perfectly beneath a window.
- Requires little installation space thanks to its slim 202mm depth.

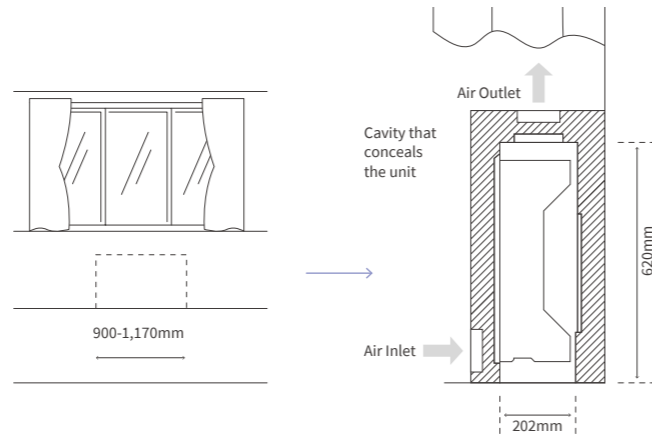

Model	RPF1-1.0FSNQ	RPF1-1.5FSNQ	RPF1-2.0FSNQ	RPF1-2.5FSNQ	
Indoor Unit Power Supply	AC 1Φ , [220-240V 50Hz]				
Nominal Capacity	Cooling kW	2.8	4.3	5.6	7.1
Sound Pressure Level	(Hi/Me/Lo) dB(A)	37/34/31	40/38/35	42/38/36	45/43/40
Outer Dimension	(H×W×D) mm	620×900×202	620×900×202	620×1,170×202	620×1,170×202
Net Weight	kg	25	26	34	34
Refrigerant		R410A	R410A	R410A	R410A
Indoor Fan Air Flow Rate	(Hi/Me/Lo) m <sup>3</sup> /min	8.5/7/6	12/8/7	16/12.5/10.5	16/14/12
Connections		Flare-Nut Connection (with Flare Nuts)			
Refrigerant Piping Diameter	Liquid Line mm	Φ6.35	Φ6.35	Φ6.35	Φ9.52
	Gas Line mm	Φ12.70	Φ12.70	Φ15.88	Φ15.88
Condensate Drain		VP25	VP25	VP25	VP25
Approximate Packing Volume	m <sup>3</sup>	0.19	0.19	0.23	0.23

NOTE:  
 1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.  
 Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre  
 2. The sound pressure level is based on following conditions.  
 1.0 metre beneath the unit  
 1.0 metre from inlet grille  
 The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

# FLOOR / CEILING CONVERTIBLE TYPE



## DIMENSIONS

RPFC-1.8~2.0FSNQ **31kg**




RPFC-2.3~2.5FSNQ **32kg**

RPFC-3.0FSNQ **39kg**

RPFC-3.3FSNQ **40kg**

RPFC-4.0FSNQ **41kg**

RPFC-5.0FSNQ **47kg**



## FEATURES AND BENEFITS

### Adapts to both floor and ceiling

#### [[CEILING USE]]


- Supplies air to a wide area.
- High ceiling use capability.

#### [[FLOOR USE]]

- Smaller footprint: Only 230mm in depth.
- Suitable for installation beneath a window thanks to the 680mm height.



Ceiling Type



Floor Type

### New air-intake design

Equipped with air-intakes, the unit connects with ventilations such as a Total Heat Exchanger using a duct, providing better interior air quality.

## Model

RPFC-1.8FSNQ RPFC-2.0FSNQ RPFC-2.3FSNQ RPFC-2.5FSNQ RPFC-3.0FSNQ RPFC-3.3FSNQ RPFC-4.0FSNQ RPFC-5.0FSNQ

### Indoor Unit Power Supply

AC 1Φ, [220-240V 50Hz]

Nominal Capacity	Cooling	kW	8.0	11.2	8.0	11.2	8.4	9.0	11.2	14.2
			<b>Sound Pressure Level</b> <b>Ceiling Mode dB(A)</b> 39/35/30 39/35/30 45/41/37 45/41/37 43/39/34 45/40/36 51/46/40 50/46/42 <b>Floor Mode dB(A)</b> 43/38/35 43/38/35 48/44/40 48/44/40 46/41/37 48/43/39 54/49/43 55/50/46							
Outer Dimension	(H×W×D)	mm	230×990×680	230×990×680	230×990×680	230×990×680	230×1,285×680	230×1,285×680	230×1,285×680	230×1,580×680
			<b>Net Weight</b> <b>kg</b> 31 31 32 32 39 40 41 47 <b>Refrigerant</b> R410A R410A R410A R410A R410A R410A R410A R410A <b>Indoor Fan Air Flow Rate (Hi/Me/Lo) m³/h</b> 780/660/540 780/660/540 966/840/678 966/840/678 1,092/912/732 1,164/978/798 1,488/1,230/978 1,980/1,680/1,380 <b>Motor</b> <b>W</b> 40 40 70 70 70 80 130 160 <b>Connections</b> Flare-Nut Connection (with Flare Nuts) <b>Refrigerant Piping Diameter</b> <b>Liquid Line mm</b> Φ6.35 Φ6.35 Φ9.52 Φ9.52 Φ9.52 Φ9.52 Φ9.52 Φ9.52 <b>Gas Line mm</b> Φ15.88 Φ15.88 Φ15.88 Φ15.88 Φ15.88 Φ15.88 Φ15.88 Φ15.88 <b>Condensate Drain</b> VP25 VP25 VP25 VP25 VP25 VP25 VP25 VP25 <b>Approximate Packing Volume m³</b> 0.31 0.31 0.31 0.31 0.40 0.40 0.40 0.48							

NOTE:

1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.

Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions.


1.0 metre Beneath the unit.  
 1.0 metre from Discharge grille.  
 The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.  
 When bottom air inlet is adopted, sound pressure will increase according to factors such as installation mode and the room structure.



# CEILING SUSPENDED TYPE



## DIMENSIONS

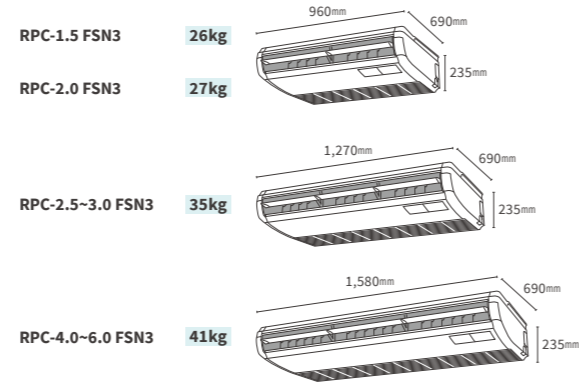


## FEATURES AND BENEFITS


### Adaptability

#### 1) Wide Detection area of motion sensor (SOR-NEP)

(optional part) to achieve better energy-saving

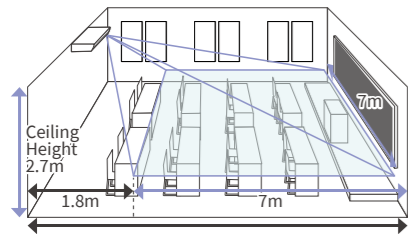


#### 2) Auto louver

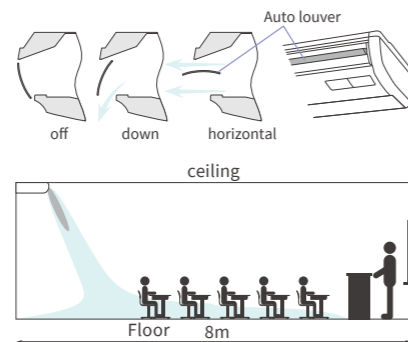

### Design Flexibility

#### Suitable for high ceiling space



\* Air flow rate: Hi2  
\* 4.0-6.0 FSN3

## Model

		RPC-1.5FSN3	RPC-2.0FSN3	RPC-2.5FSN3	RPC-3.0FSN3	RPC-4.0FSN3	RPC-5.0FSN3	RPC-6.0FSN3	
<b>Indoor Unit Power Supply</b>		AC 1Φ, [220-240V 50Hz]							
<b>Nominal Capacity</b>	<b>Cooling kW</b>	4.0	5.6	7.1	8.0	11.2	14.0	16.0	
<b>Sound Pressure Level</b>	<b>(Hi2/Hi/Me/Lo) dB(A)</b>	37/35/31/28	38/35/31/28	38/35/31/28	40/37/33/29	44/42/37/32	48/45/41/35	49/47/42/36	
<b>Color</b>		Neutral White							
<b>Outer Dimension</b>	<b>(H×W×D) mm</b>	235×960×690	235×960×690	235×1,270×690	235×1,270×690	235×1,580×690	235×1,580×690	235×1,580×690	
<b>Net Weight</b>	<b>kg</b>	26	27	35	35	41	41	41	
<b>Refrigerant</b>		R410A							
<b>Indoor Fan Air Flow Rate</b>	<b>(Hi2/Hi/Me/Lo) m³/min</b>	15/13/11/9	15/13/11/9	19/16.5/14/11.5	21/18.5/15.5/12.5	30/26.5/22/17	35/31/25.5/20	37/32.5/27/21	
<b>Motor</b>		W 50 50 80 80 160 160 160							
<b>Connections</b>		Flare-Nut Connection (with Flare Nuts)							
<b>Refrigerant Piping Diameter</b>	<b>Liquid Line mm</b>	Φ6.35	Φ6.35	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52	
	<b>Gas Line mm</b>	Φ12.7	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88	
<b>Condensate Drain</b>		VP20 VP20 VP20 VP20 VP20 VP20 VP20							
<b>Approximate Packing Volume</b>	<b>m³</b>	0.23	0.23	0.31	0.31	0.38	0.38	0.38	

NOTE:

1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.

Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions.

1.0 metre Beneath the unit.  
 1.0 metre from Discharge grille.  
 The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.  
 When bottom air inlet is adopted, sound pressure will increase according to factors such as installation mode and the room structure.




## WALL MOUNTED TYPE




### DIMENSIONS


RPK-0.8-1.5FSNQS 10kg



RPK-1.8-2.3FSNQS 12.5kg



RPK-2.5-4.0FSN4M 15kg



### FEATURES AND BENEFITS

#### Simple installation procedure

Refrigerant piping can be connected from the rear, base, or left of the unit, providing much greater flexibility for piping and selection of installation sites.

#### Flexible design suitable for any décor

With smooth flat covers, the units match most modern interiors. Their compact size enables them to blend in, even in small spaces.

#### Easy maintenance

Front flat panel keeps the unit from dust and facilitates maintenance work. The front grille hinges open easily—no tools are needed to gain quick access to the filter. The filter can be removed and cleaned as required.



### Type

Expansion Valve built-in type

### Model

RPK-0.8FSNQS RPK-1.0FSNQS RPK-1.3FSNQS RPK-1.5FSNQS RPK-1.8FSNQS RPK-2.0FSNQS RPK-2.3FSNQS

Indoor Unit Power Supply			AC 1Φ, [220-240V/50Hz]						
Nominal Capacity	Cooling	kW	2.2	2.8	3.6	4.0	5.0	5.6	6.3
Sound Pressure Level	(Hi2/Hi/Me/Lo)	dB(A)	35/32/31/29	39/35/32/30	39/35/32/30	46/40/36/33	39/35/32/30	46/40/36/33	42/40/38/33
Color			White						
Outer Dimension	(H×W×D)	mm	280×780×220	280×780×220	280×780×220	280×780×220	290×1,050×220	290×1,050×220	290×1,050×220
Net Weight		kg	10	10	10	10	12.5	12.5	12.5
Refrigerant			R410A						
Indoor Fan Air Flow Rate	(Hi/Me/Lo)	m <sup>3</sup> /min	8.5/7.5/6.5	8.5/7.5/6.5	9.2/7.5/6.7	10/8.5/7.5	12/10.3/8.7	12/10.3/8.7	13.7/12/10.3
Connections			Flare-Nut Connection (with Flare Nuts)						
Refrigerant Piping Diameter	Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35
	Gas Line	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7
Condensate Drain			VP16						
Approximate Packing Volume		m <sup>3</sup>	0.12	0.12	0.12	0.12	0.16	0.16	0.16

### Type

Expansion valve built-in type

### Model

RPK-2.5FSN4M RPK-3.0FSN4M RPK-4.0FSN4M

Indoor Unit Power Supply			AC 1Φ, [220-240V 50Hz]		
Nominal Capacity	Cooling	kW	7.1	8.0	11.2
Sound Pressure Level	(Hi2/Hi/Me/Lo)	dB(A)	45/42/38/35	47/44/40/35	51/48/44/39
Color			White		
Outer Dimension	(H×W×D)	mm	300×1,100×260	300×1,100×260	300×1,100×260
Net Weight		kg	15	15	15
Refrigerant			R410A		
Indoor Fan Air Flow Rate	(Hi2/Hi/Me/Lo)	m <sup>3</sup> /min	18.5/16.5/14/12	20/17.5/15.5/12.5	23/20/17.5/14.5
Motor		W	38	38	38
Connections			Flare-Nut Connection (with Flare Nuts)		
Refrigerant Piping Diameter	Liquid Line	mm	Φ9.52	Φ9.52	Φ9.52
	Gas Line	mm	Φ15.88	Φ15.88	Φ15.88
Condensate Drain			VP16		
Approximate Packing Volume		m <sup>3</sup>	0.14	0.14	0.14

NOTE:

1. The cooling capacities above show the maximum capacities when the outdoor and indoor temperature are under the following conditions.

Cooling Operation Conditions  
 Indoor Air Inlet Temperature: 27°C DB (80°F DB)  
 19.0°C WB (66.2°F WB)  
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)  
 Piping Length: 7.5 metre  
 Piping Lift: 0 metre

2. The sound pressure level is based on following conditions.

1.0 metre Beneath the unit.  
 1.0 metre from Discharge grille.

The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field. When bottom air inlet is adopted, sound pressure will increase according to factors such as installation mode and the room structure.

# VENTILATION

## ALL FRESH AIR UNIT



Model	RPI-5.0KFNQ	RPI-8.0KFNQ	RPI-10.0KFNQ	RPI-12.0KFNQ
Unit Power Supply	AC 1Φ, 220-240V/50Hz			AC 3Φ 380-415V/50Hz
Connectable Outdoor Unit	SET FREE Σ CNCQ Series			RAS-12CNBCM-Q
Nominal Capacity	14.0	22.4	28.0	33.5
Sound Pressure Level	42	44	47	56
Outer Dimensions (H×W×D)	370 × 1,320 × 800	486 × 1,270 × 1,069	486 × 1,270 × 1,069	486 × 1,270 × 1,069
Net Weight	63	110	110	110
Refrigerant	R410A			R410A
Fan Air Flow Rate	1,080	1,680	2,100	3,000
External Static Pressure	200	220	220	220
Refrigerant Piping Diameter	Φ9.53	Φ9.53	Φ9.53	Φ12.7
Condensate Drain	VP25, outer diameter: Φ32mm			
Temperature range of fresh air drawn	Cooling: 20°C ~ 43°C			

Model	RPI-16.0KFNQL	RPI-16.0KFNQH	RPI-20.0KFNQL	RPI-20.0KFNQH	RPI-20.0KFNQLF	RPI-20.0KFNQHF
Unit Power Supply	AC 3Φ 380-415V/50Hz					
Connectable Outdoor Unit	RAS-16CNBCM-Q	RAS-16CNBCM-Q	RAS-20CNBCM-Q	RAS-20CNBCM-Q	RAS-20CNBCM-Q	RAS-20CNBCM-Q
Nominal Capacity	45.0	45.0	56.0	56.0	56.0	56.0
Sound Pressure Level	58	62	61	65	63	67
Outer Dimensions (H×W×D)	635 × 1,950 × 805	635 × 1,950 × 805	735 × 1,950 × 805	735 × 1,950 × 805	735 × 1,950 × 805	735 × 1,950 × 805
Net Weight	196	196	222	222	222	222
Refrigerant	R410A					
Fan Air Flow Rate	4,000	4,000	5,000	5,000	6,000	6,000
External Static Pressure	200	300	200	300	200	300
Refrigerant Piping Diameter	Φ12.7	Φ12.7	Φ15.88	Φ15.88	Φ15.88	Φ15.88
Condensate Drain	RC1 (Internal Screw)					
Temperature range of fresh air drawn	Cooling: 20°C ~ 43°C					

NOTE:

- Cooling capacity test in the following conditions:  
Cooling conditions: 33°CDB, 28°CWB, pipeline length 7.5 metre, pipe height difference 0.0 metre
- Noise test conditions are as follows:  
At a distance of 1.5 metre from the unit surface.  
The above parameters are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be counted at the scene.
- An air filter with dust removal efficiency of 50% or more needs to be installed at the air inlet.
- When the field duct resistance is small and the fan speed is too high, the unit will appear the phenomena of abnormal shutdown, fault, water spray etc., and the duct pipe should be insulated to prevent generating dew.
- Air processor can only be used for processing fresh air, indoor air conditioning load processing need to use other air conditioners.
- Refer to capacity restrains shown on Table below for indoor unit capacity connectable to outdoor unit.

System	Only All Fresh Air Unit System	Mixed System (All Fresh Air Unit and Other Indoor Unit)
Range of Combination Capacity	80 to 100%	i) 80 to 100% and ii) Total Capacity of All Fresh Air: 30%

- When outdoor temperature is below 20°C in cooling operation, the system will be automatically converted to ventilation operation.

## TOTAL HEAT EXCHANGER



Model	KPI-20H-A-GQ	KPI-30H-A-GQ	KPI-40H-A-GQ	KPI-50H-A-GQ	KPI-65H-A-GQ	KPI-80H-A-GQ	KPI-100H-A-GQ	KPI-125H-A-GQ
Unit Power Supply	AC 1Φ, [220V 50Hz]							
Temp. Efficiency (Hi/Me/Lo)	%	64/64/70	60/60/65	61/61/66	60/60/62	65/65/69	65/65/69	65/65/69
Enthalpy Efficiency (Hi/Me/Lo)	%	69/69/76	63/63/70	64/64/69	63/63/65	57/57/60	60/60/63	58/58/63
Sound Pressure Level (Hi/Me/Lo)	dB(A)	32/30/25	36/34/28	39/37/30	40/38/31	40/38/35	40/38/34	43/42/34
Outer Dimension (H×W×D)	mm	220×962×735	220×962×735	220×1,112×735	220×1,112×735	388×1,119×884	388×1,119×884	388×1,119×884
Net Weight	kg	38	40	46	52	61	69	95
Air Flow Rate (Hi/Me/Lo)	m³/h	200/200/150	300/300/210	400/400/230	500/500/400	650/650/550	800/800/650	1,000/1,000/700
External Static Pressure (Hi/Me/Lo)	Pa	100/70/40	120/90/50	120/90/50	120/90/50	130/100/90	130/100/90	165/120/60
Power Input (Hi/Me/Lo)	W	120/110/75	165/155/120	210/200/130	330/310/230	2×(188/173/142)	2×(207/188/165)	2×(250/228/205)
Current (Hi/Me/Lo)	A	0.6/0.5/0.4	0.8/0.7/0.6	1.0/1.0/0.7	1.6/1.5/1.1	1.72/1.58/1.31	2.04/1.93/1.73	2.35/2.09/1.92
Connection Duct Diameter	mm	Φ144	Φ144	Φ144	Φ194	Φ242	Φ242	320×250 +320×250
Approximate Packing Volume	m³	0.37	0.37	0.43	0.49	0.94	1.15	1.15

Model	KPI-150H-E-GQ	KPI-200H-E-GQ	KPI-250H-E-GQ	KPI-300H-E-GQ	KPF-400H-E-GQ	KPF-500H-E-GQ
Unit Power Supply	AC 3 Φ, [380V 50Hz]					
Temp. Efficiency	%	63	63	63	63	63
Enthalpy Efficiency	%	57	57	55	56	55
Sound Pressure Level	dB(A)	50	51	53	54	57
Outer Dimension (H×W×D)	mm	536×1,500×1,300	536×1,500×1,400	640×1,700×1,500	640×1,750×1,600	1,655×1,400×850
Net Weight	kg	144	155	180	220	260
Air Flow Rate	m³/h	1,500	2,000	2,500	3,000	4,000
External Static Pressure	Pa	165	160	180	200	240
Power Input	W	2×440	2×810	2×925	2×1080	2×1,470
Current	A	2.84	3.08	4.19	5.23	7.51
Connection Duct Diameter	mm	400×320 +400×320	400×320 +400×320	500×350 +500×350	500×350 +500×350	400×320 +590×320
Approximate Packing Volume	m³	1.82	1.95	2.63	2.93	3.01

NOTE:

Remote controller for Total Heat Exchanger is included in the unit package as standard equipment

## OPTIONAL PARTS

(Each number (HP class) represents the number in the model nomenclature of each indoor units)

(kW = Cooling capacity)

### CEILING CASSETTE

#### 4-way cassette type



Decoration Panel	- (included as standard equipment)	
Receiver Kit	Standard	HR4A10NEWQ
	Optional	PC-ALH3
Motion Sensor	PS-MSK2	
Duct Adapter	PD-75A	

#### 4-way cassette compact type



Decoration Panel	P-AP56NAM	
Receiver Kit	PC-ALHC1	
Motion Sensor	SOR-NEC	
Duct Adapter	PD-75C	

#### 2-way cassette type



Decoration panel	0.8-3.0 (HP class)	P-AP90DNA
	4.0-6.0 (HP class)	P-AP160DNA
Receiver kit	PC-ALHD1	
Motion Sensor	SOR-NED	
Duct Adapter	PD-150D	

#### 1-way cassette type



Decoration Panel	0.8-1.0 (HP class)	P-AP36CNA
	1.5-2.0 (HP class)	P-AP56CNA
	2.5-3.0 (HP class)	P-AP80CNA
Receiver Kit	PC-ALHS1	
Motion Sensor	SOR-NES	
Duct Adapter	PD-100	

### DUCTED



Receiver Kit	Standard	PC-RLH11
	Optional	PC-ALHZ1
Drain-up mechanism kit	0.8-2.5 (HP class)	DUPI-131Q
	3.0-6.0 (HP class)	DUPI-361Q
	8.0-10.0 (HP class)	DUPI-15H2Q
	Slim/Compact	- (included as standard equipment)
Air filter	Medium ESP/Low ESP	0.8-1.5 (HP class) KW-PP7Q
	Medium ESP/Low ESP	1.8-2.5 (HP class) KW-PP8Q
	High ESP/Low ESP	3.0-4.0 (HP class) KW-PP9Q
	High ESP/Low ESP	5.0-6.0 (HP class) KW-PP10Q
	Compact	0.8-1.5 (HP class) KW-PP5Q
	Compact	1.8-2.5 (HP class) KW-PP6Q

### OTHERS

#### Floor concealed type



Receiver Kit	Standard	PC-RLH11
	Optional	PC-ALHZ1

#### Ceiling/Floor convertible type



Receiver Kit	Standard	PC-RLH11
	Optional	PC-ALHZ1

Standard Receiver kit (PC-RLH11) is equipped with the unit in package as standard optional part with Wireless Remote Controller (PC-LH3A).

#### Ceiling suspended type



Receiver kit	PC-ALHP1	
Motion Sensor	SOR-NEP	
	1.5 (HP class)	DUPC-63K1
Optional Drain Pump	2.0 (HP class)	DUPC-71K1
	2.5-6.0 (HP class)	DUPC-160K1

#### Wall mounted type




Receiver kit	Standard	PC-RLH11
	Optional	PC-ALHZ1
Strainer kit	0.8-2.3 (HP class)	MSF-NP63A1
	2.5-4.0 (HP class)	MSF-NP112A1

(0.8-2.3HP class)  
Standard Receiver kit (PC-RLH11) is equipped with the unit in package as standard optional part with Wireless Remote Controller (PC-LH3A).  
(2.5-4.0HP class)  
Receiver Kit is installed in the unit as standard part. Please use Receiver Kit (PC-ALHZ1) when receiver kit needs to be installed separately from unit.

## INTRODUCTION OF MOTION SENSOR KIT

### What is it?


It senses the amount of human activity, undertakes automatic saving and achieves intelligent energy saving.

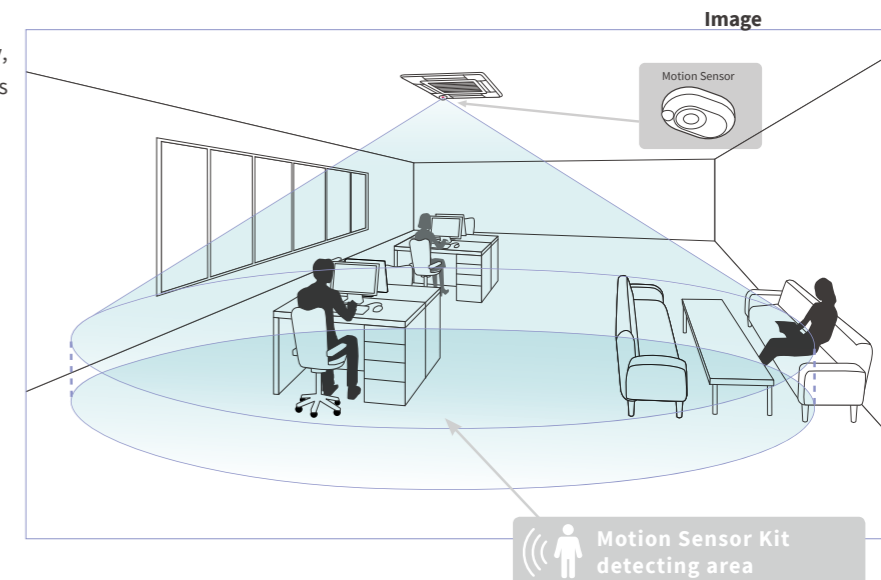


### How does it work?

Perceives the amount of human activity and undertakes automatic saving.


<example>

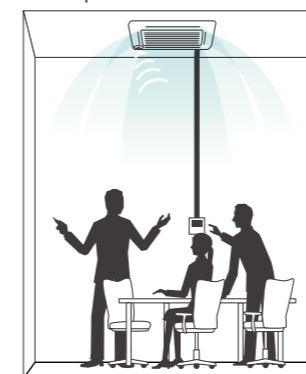


Standard operation for a room with a lot of human movement.

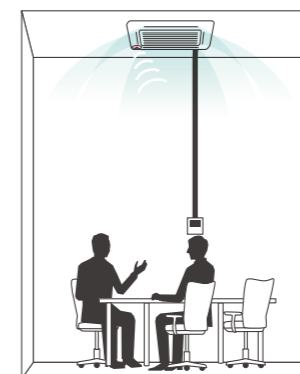

Moderate operation for a room with little human movement.

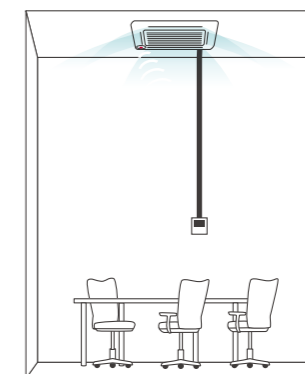

More moderate operation if people are absent for a certain period.

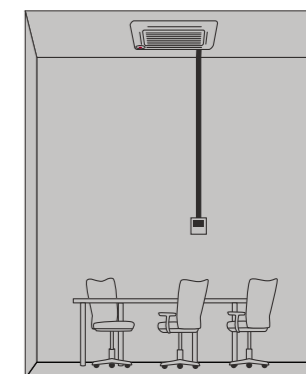

It is also possible to stop the operation of the unit by applying a particular setting if people remain absent for more than 30 minutes.


### MODEL

Motion Sensor Kit	Indoor Unit
PS-MSK2	4-way cassette type
SOR-NEC	4-way cassette compact type
SOR-NED	2-way cassette type
SOR-NES	1-way cassette type
SOR-NEP	Ceiling Suspended type

※ Motion Sensor Kit is available only when advanced wired remote controller (PC-ARF1) is connected to each indoor unit.

# Management made simple


We all like to have control over the indoor spaces where we live, work and play. That power is at your fingertips with a range of controllers for every application. Simple and intuitive interfaces, wireless mobility and seamless connectivity make managing even the most complex systems second nature.

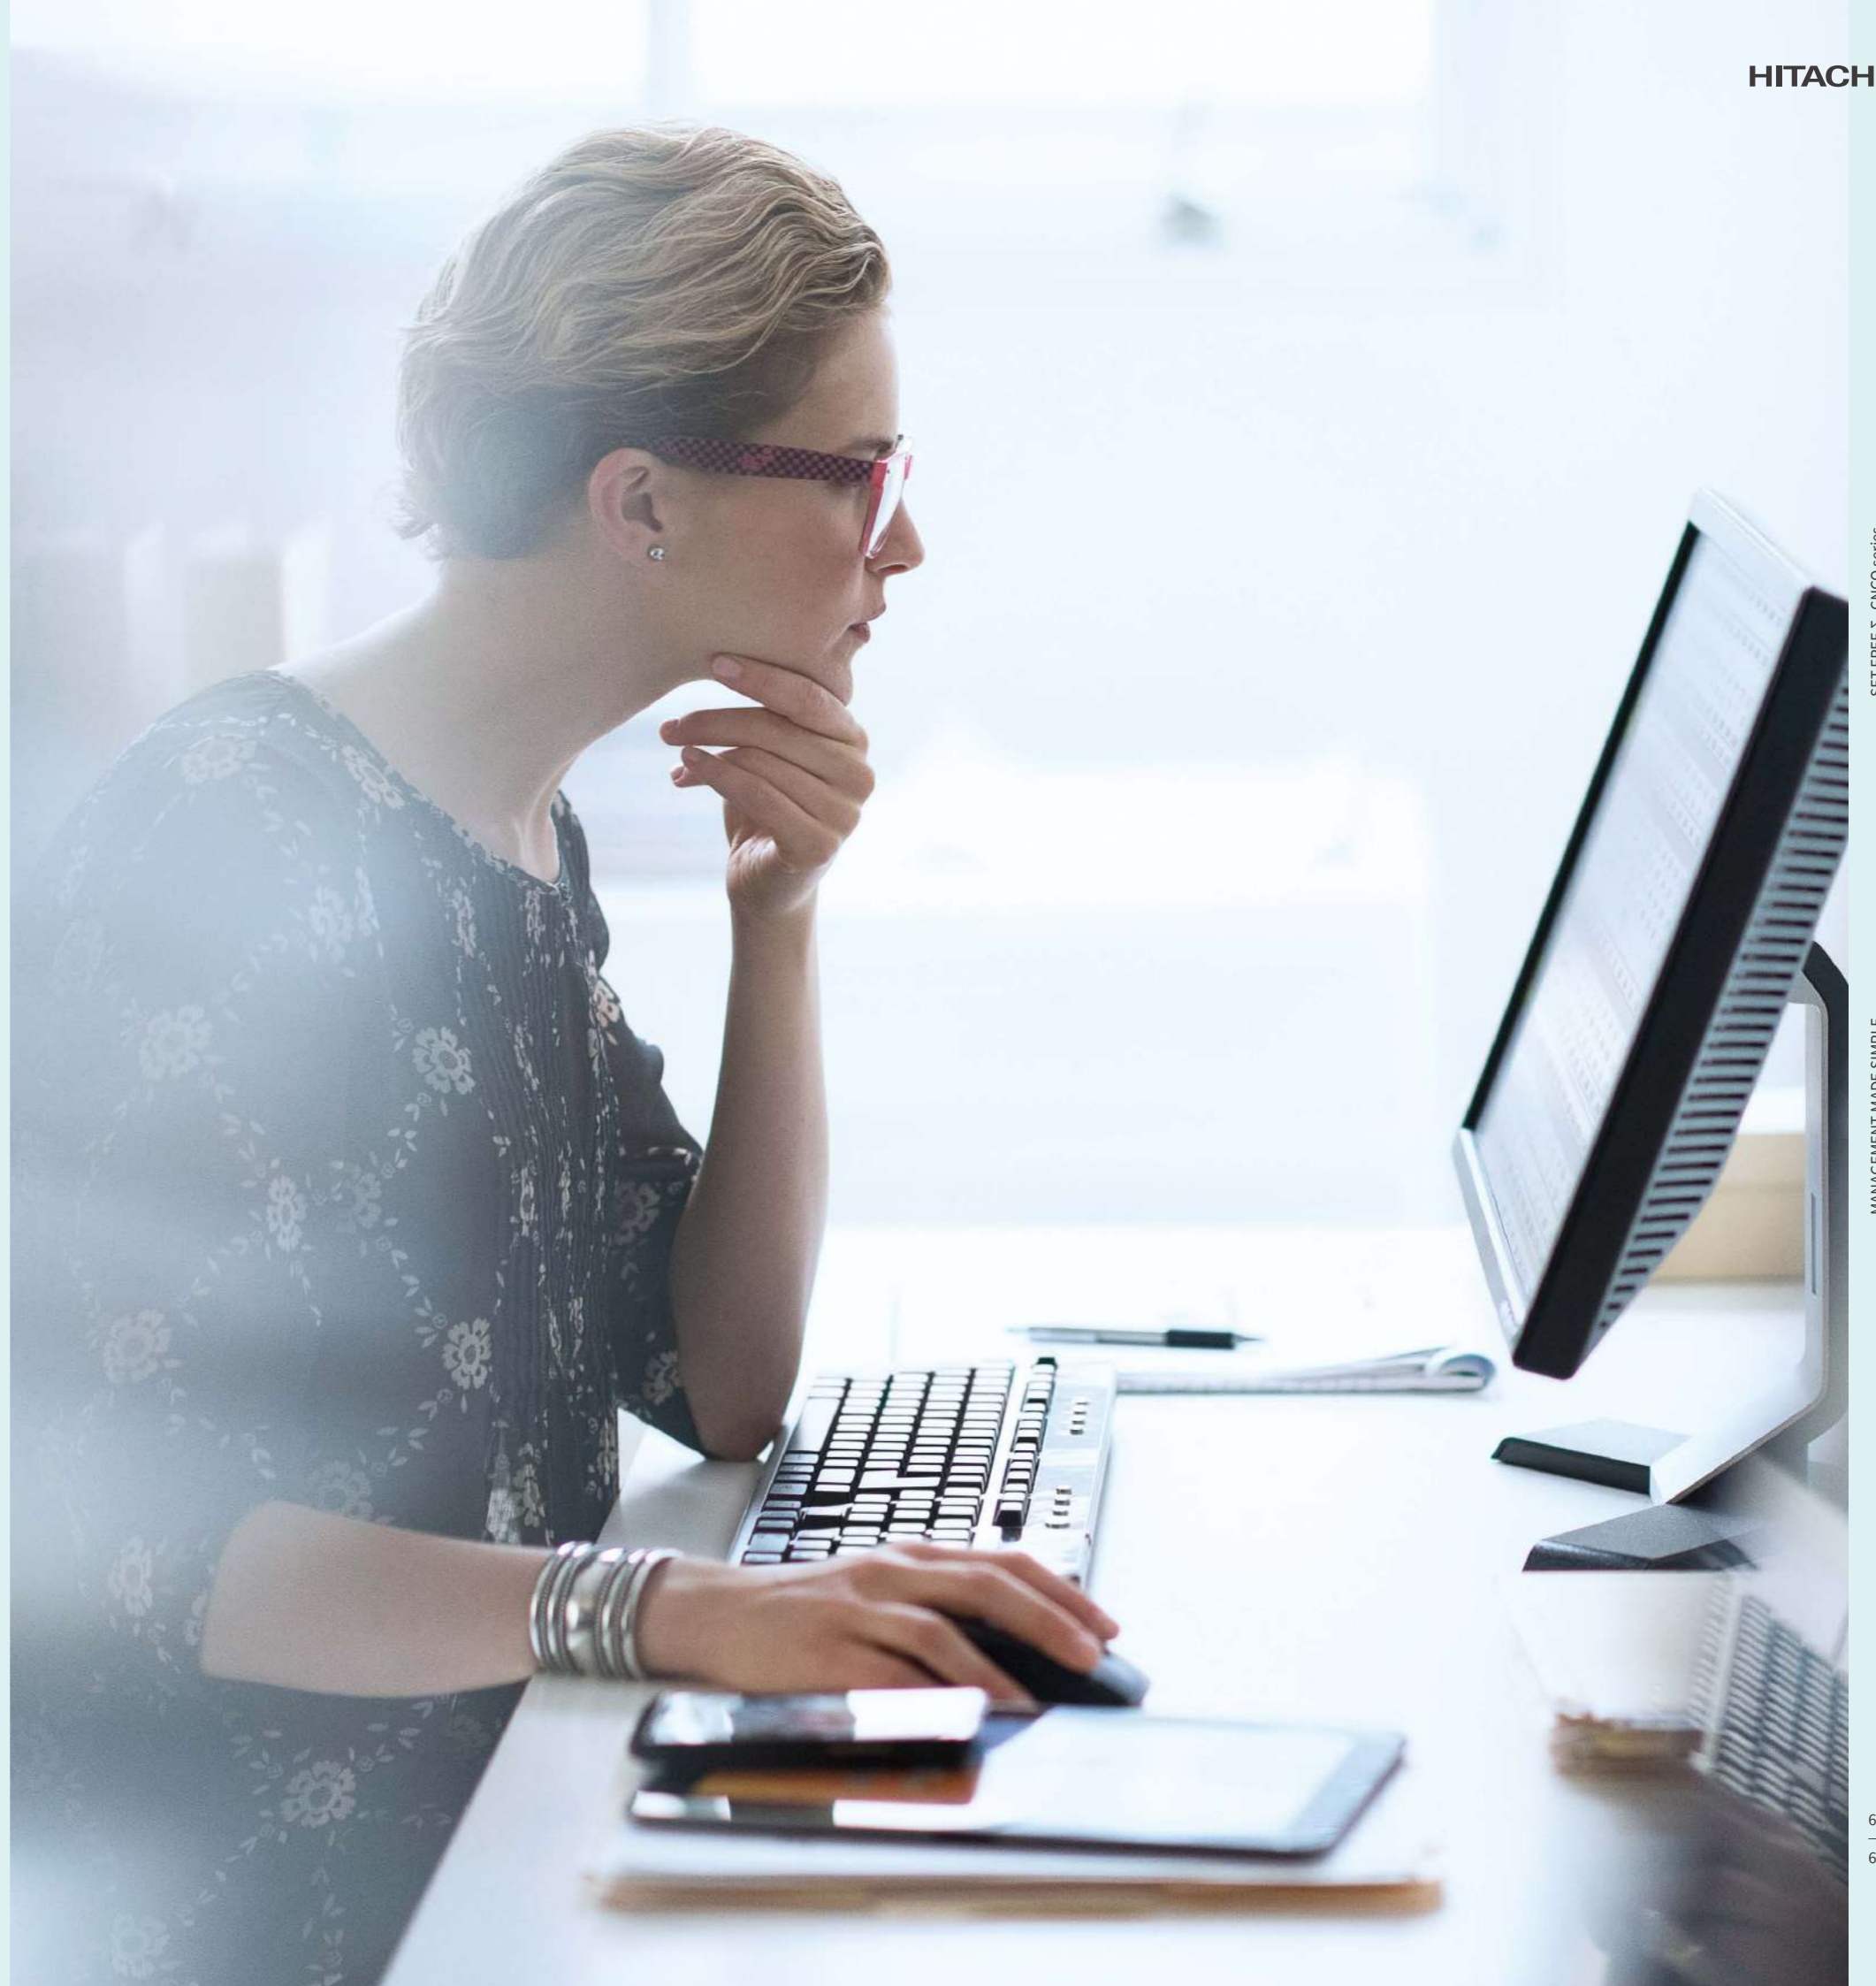



# LINE UP OVERVIEW

## COMPARING INDIVIDUAL CONTROLLERS

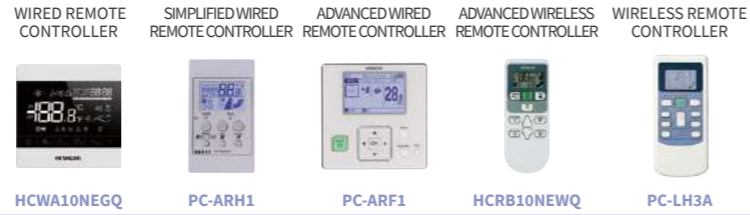

		HCWA10NEGQ	PC-ARH1	PC-ARF1	HCRB10NEWQ	PC-LH3A
Connection Capacity	RCS Groups	1	1	1	-	-
	Indoor units (*1)	16	16	16	-	-
Setting	Temperature Setting Rate (*2)	°C (0.5/1) °F (1)	°C (0.5/1) °F (1)	°C (0.5/1) °F (1)	°C (0.5/1) °F (1)	°C (1)
	Indoor Fan Speed (*2) (*3)	3/4/6 taps	3/4/6 taps	3/4/6 taps	3/4/6 taps	3 taps
	Louver Direction (*2)	●	●	●	●	●
	Individual Louver Setting (*2)	●	-	●	-	-
	Remote Control Primary-Secondary Setting	-	●	●	-	-
	Function Selection	●	●	●	-	-
	Automatic Restart with Eco-operation	●	●	●	-	-
	Automatic Reset Temperature (Cooling)	●	●	●	-	-
	Temperature Indication (*4)	●	-	●	-	-
	Filter Sign	●	-	●	-	-
Service & Installation	Filter Sign Reset	●	-	●	●	●
	Louver Open / Close	-	-	●	-	-
	Room Name Setting	-	-	●	-	-
	Alarm Sign	●	●	●	-	-
	Identifying indoor units side-by-side	-	-	-	●	●
	Screen	-	-	●	-	-
	Screen Adjustment	-	-	●	-	-
	Language	-	-	●	-	-
	Temperature Unit - °C / °F	●	● (*5)	●	●	-
	Adjusting Brightness of Run Indicator	-	-	●	-	-
Check Menu	Sensor Condition Check	●	-	●	-	-
	Model Display (*2)	-	-	●	-	-
	Indoor / Outdoor PCB Check	-	-	●	-	-
	Alarm History Display	●	-	●	-	-
Management	Operation Lock / Set	● (*6)	-	●	-	-
	Lower Limit for Cooling Operation	●	●	●	-	-
	Built-in Timer (On / Off)	●	-	●	●	●
	Adjusting Date / Time Setting	●	-	●	-	-
	Automatic OFF timer setting	-	●	●	-	-
	Schedule	-	-	●	-	-
	Weekly Schedule	-	-	●	-	-
	Settable Timer Operation Times (Per Day)	-	-	5	-	-
	Holiday Setting	-	-	●	-	-
	Schedule On / Off	-	-	●	-	-
Power Saving	Power Saving with Motion Sensor	-	-	●	-	-
	Outdoor Unit capacity control	-	-	●	-	-
	Peak cut control	-	-	●	-	-
	moderate control	-	-	●	-	-
MENU	Indoor Unit Address	-	-	●	-	-
	Rotation Control	-	-	●	-	-
	Indoor Air Temperature difference	-	-	●	-	-
	Automatic Fan Operation	-	-	●	-	-
MENU	ODU silent mode	-	-	●	-	-
	Quick Function	-	-	●	-	-
	Comfort setting	-	-	●	-	-
	Control Cool Air	-	-	●	-	-
MENU	Saving/ODU Noise Reduction Schedule	-	-	●	-	-
	Daylight Saving Time	-	-	●	-	-
MENU	Power Consumption visualization	-	-	●	-	-

(\*1) All 16 indoor units need to be connected with transition wire.  
 (\*2) Availability depends on the indoor unit type connected to the each individual controllers. Please consult your distributors for more details.  
 (\*3) 6 taps is available for Ducted indoor unit, compact type, RPIZ-HNDTSQ only.  
 (\*4) Indicated temperature can be selected from two options, the thermistor in the indoor unit or in the individual controller.  
 (\*5) Please contact your distributor in case temperature unit needs to be changed from °C to °F.  
 (\*6) Only "bulk operation lock" available

## COMPARING CENTRALIZED CONTROLLERS



		PSC-A32MN	PSC-A64GT	PSC-A128EX	PSC-A64S	PSC-A16RS
Capacity comparison	RCS group	32	64	2560 (*1)	64	16
	Group	4	64	2048 (*1)	64	-
	Block	2/4/8/16	4	512 (*2)	4	-
	Area	-	-	512 (*2)	-	-
	Indoor unit	160	160	2560 (*1)	160	160
	Outdoor unit	64	64	1024 (*1)	64	-
Building scale	Building scale	Small	Medium	Large	Medium	Medium
	Operation	Touch screen	Touch screen	Touch screen	Button	Button
Display	Operation panel size options	4	2	7	-	-
	Layout	-	-	●	-	-
	List options	-	-	3	-	-
Operation unit	All together	●	●	●	●	●
	By layout	-	-	●	-	-
	By area	-	-	●	-	-
	By block	●	●	●	●	-
	By group	-	-	●	-	-
	By RCS group	●	●	-	●	●
Control Function	By indoor unit	-	-	●	-	-
	Main 5 functions (*5)	●	●	●	●	- (*6)
	Individual controller lock	●	△ (*3)	●	●	-
	Filter sign reset	●	●	●	●	-
	Outdoor unit capacity control	△ (*4)	-	●	-	-
	Outdoor unit noise control	-	-	●	-	-
Monitor Function	Main 5 functions (*5)	●	●	●	●	-
	Individual controller lock	●	●	●	●	-
	Alarm status & code	●	●	●	●	- (*7)
	Filter sign	●	●	●	●	-
	Air inlet temperature of indoor unit	●	●	●	-	-
	Air inlet temperature of outdoor unit	●	●	●	-	-
Schedule Function	Weekly	●	●	●	- (*8)	- (*8)
	Setting times per day	10	10	16	3 (*8)	3 (*8)
	Special day setting	-	-	5	-	-
	Annual/Summer/Winter schedule	-	-	●	-	-
Other function	Alarm history (records number)	100	100	10000	-	-
	External in/output history	-	-	1000	-	-
	Management report visualization	●	●	●	-	-
	Data output by external media	-	-	SD card, USB flash device	-	-

(\*1) One external adapter can control [128 remote controller groups / 128 groups / 32 blocks], and Central Station EX can connect up to 15 adapters.  
 (\*2) No restriction on the number of H-LINK  
 (\*3) Individual Function Control in Each Remote Controller is not applicable  
 (\*4) Applicable by Schedule function or External Signal input  
 (\*5) Main 5 functions mean 1) Run/Stop 2) Operation mode 3) Temperature setting 4) Fan speed 5) Louver control  
 (\*6) Only Run/Stop is available  
 (\*7) Alarm Code cannot be displayed, but Operation indicator keeps flashing in red to inform abnormal condition  
 (\*8) Available with 7-day timer (PSC-A1T)

**WIRED REMOTE CONTROLLER HCWA10NEGQ**

Temperature display  
Room temperature  
RT 26.0°C SET 79.0°F

Set temperature  
SET 26.0°C SET 79.0°F

ON/OFF Button  
Mode Button

Liquid Crystal Display (LCD) Screen  
Up Button & Down Button

Operation Mode

- Cooling Mode ❄️
- Dry Mode 💧
- Fan Mode 🌀
- Auto Mode 🔄

Fan Speed Setting

Timer/Clock Setting

Fan Speed

(flickering) MAX

MIN

Timer Setting

- ON OFF
- Timer On
- Timer Off
- ONCE Timer Valid for One Time
- DAILY Timer Valid for One Day
- WEEKLY Timer Set for a Week

**SPECIFICATIONS**

**Outer Dimensions (H×W×D)**

(mm) 88.0×88.0×15.5

**FUNCTIONS**

	Run / Stop
	Operation Mode
	Auto Mode
	Temperature Setting Rate _ 0.5°C/1°C/1°F
<b>Setting</b>	Temperature Unit _ °C/°F
	Fan Speed _ 3/4/6 taps
	Louver Direction
	Individual Louver Setting
<b>Service</b>	Filter Sign
	Filter Sign Reset
	Alarm Sign
	Alarm Sign History
<b>Schedule &amp; Management</b>	Daily Timer
	Weekly Timer
	Main-sub Control Operation Lock

Notes:

1. Fan Speed Taps setting unit availability varies with the indoor unit. Please check each technical catalog in advance.
2. Initial Setting of temperature display is "Set temperature" display only. Please contact your dealer to display room temperature.

**SIMPLIFIED WIRED REMOTE CONTROLLER PC-ARH1**

Run Indicator (Red)  
ON / OFF Switch

Operation Mode Switch

- FAN
- COOL
- DRY
- AUTO

TEMP (Temperature Setting) Switch

Swing Louver (Swing Louver Operation) Switch

Fan Speed Switch

By repeatedly pressing the button, the fan speed setting will change sequentially.

**SPECIFICATIONS**

**Outer Dimensions (H×W×D)**

(mm) 120.0×70.0×17.0

**FUNCTIONS**

	Run / Stop
	Operation Mode
	Auto Mode Setting
<b>Setting</b>	Temperature Setting
	Temperature setting rate_°C (0.5/1)_°F(1)
	Back-light screen
	Fan Speed_ 3/4/6 taps
	Louver Direction


\*Please contact your dealer in case "temperature setting rate" needs to be changed from °C to °F.



SET FREE Σ CNCQ series

INDIVIDUAL CONTROLLERS

# ADVANCED WIRED REMOTE CONTROLLER PC-ARF1

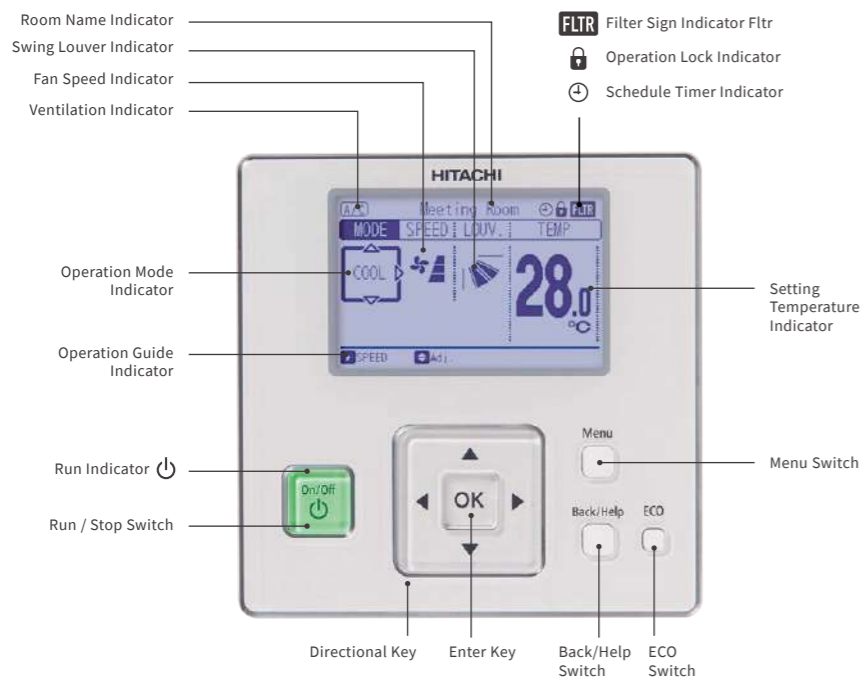


## SPECIFICATIONS

Outer Dimensions (H×W×D)  
(mm) 120.0×120.0×17.9

## SIMPLE OPERATION


### Directional Key

4 main items [Mode] [Speed] [Louver] [Temperature]

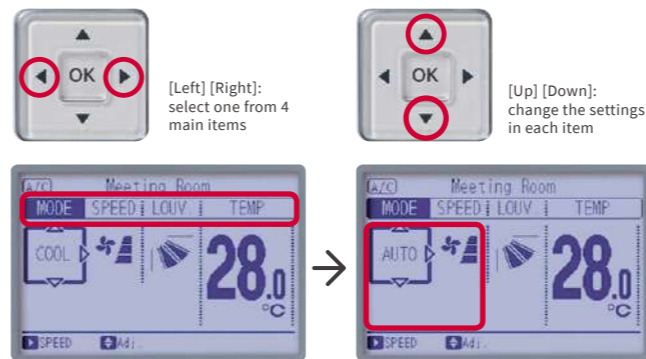

### Power-saving button

Easy access to the any power-saving functions, including support-guidance.




### Menu button

Display all setting except 4 main items, like schedule.




## EXAMPLE OF SYSTEM CONFIGURATION

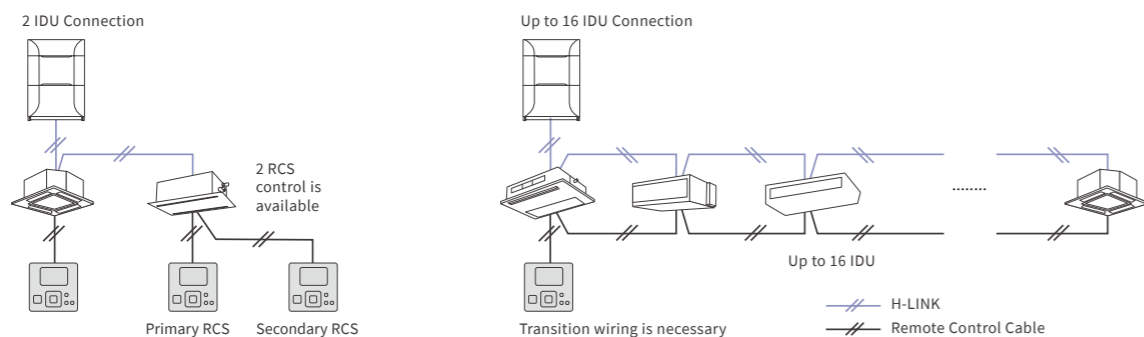

## ADAPTABILITY

### Improved main-sub RCS control

By one main RCS, you can control the multiple IDUs which are controlled by sub RCS.  
\* Operation Mode  
\* Setting Temperature

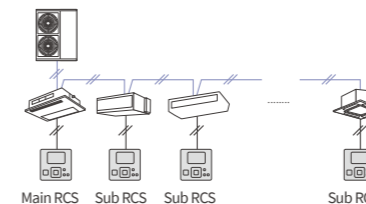

### Thermometer function

Current temperature can be displayed anytime, without being in maintenance mode.  
\*Thermometer can be chosen out of 3 sensors (Air inlet, Air outlet, Remote controller)



### Alarm code check

Contact address shown in the same display.




### ODU silent mode

Set in the weekly schedule by 5 times.



Setting	Function Selection	Management	Service	Screen	Power-Saving	Schedule
Run/Stop	Automatic Restart with Eco-operation	Built-in-Timer (on/off)	Filter Sign	Temperature Unit - °C /°F	With Motion Sensor Kit	With Motion Sensor Kit
Operation Mode	Automatic Reset Temperature (Cooling)	Adjusting Date / Time Setting	Filter Sign Reset	Adjusting Brightness of Run Indicator	ODU Capacity Control	ODU Capacity Control
Auto Mode Setting	Temperature Indication	Thermometer Indication	Louver Open / Close	Operation Lock / Set	• Peak Shaving Control	• Peak Shaving Control
Temperature Setting			Room Name Setting	Main / Sub Control	• Proper Limit Control	• Proper Limit Control
Fan Speed _ 3/4/6 taps			Alarm Sign	Maintenance Mode	Indoor Unit Rotation Control	Indoor Unit Rotation Control
Louver Direction			Alarm History Display	Screen Adjustment	Automatic Fan Operation	Automatic Fan Operation
Individual Louver Setting			Screen Adjustment	Temperature Unit - °C /°F	Auto Recovery of Temperature	Auto Recovery of Temperature
Remote Control Primary-Secondary Setting			Adjusting Brightness of Run Indicator	Adjusting Brightness of Run Indicator	Lower Limit for Cooling Operation	Lower Limit for Cooling Operation
Automatic Restart with Eco-operation			Operation Lock / Set	Operation Lock / Set	Weekly Schedule	Weekly Schedule
Automatic Reset Temperature (Cooling)			Main / Sub Control	Main / Sub Control	Settable Timer Operation Times (per day): 5	Settable Timer Operation Times (per day): 5
Temperature Indication			Built-in-Timer (on/off)	Built-in-Timer (on/off)	Holiday Setting	Holiday Setting
			Adjusting Date / Time Setting	Adjusting Date / Time Setting	Schedule On / Off	Schedule On / Off
			Thermometer Indication	Thermometer Indication	ODU Noise Reduction Schedule	ODU Noise Reduction Schedule

# ADVANCED WIRELESS REMOTE CONTROLLER HCRB10NEWQ

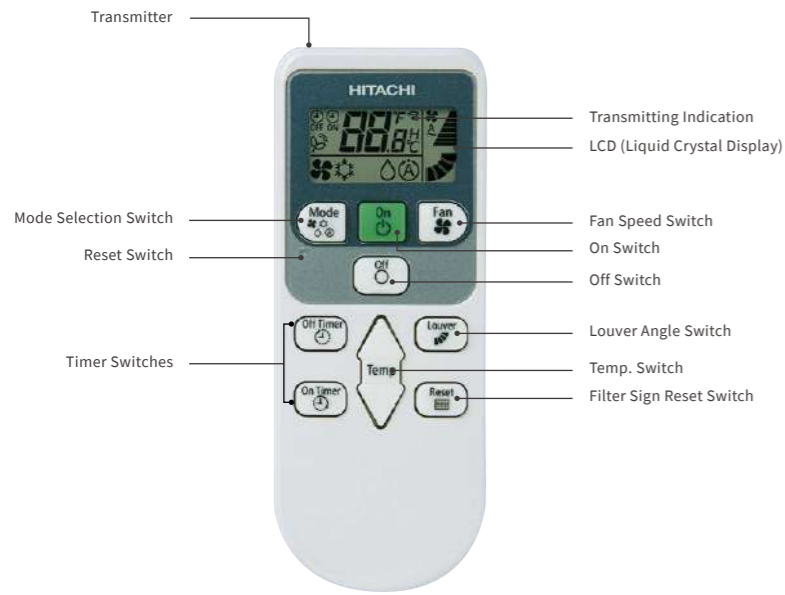


## SPECIFICATIONS

**Outer Dimensions (H×W×D)**  
(mm) 140.0×55.0×16.8

## FUNCTIONS

<b>Setting</b>	Run / Stop Operation Mode Auto Mode Setting Temperature Setting Temperature Setting Rate _ °C (0.5/1)_°F(1) Fan Speed _ 3/4/6 taps Louver Direction Filter Sign Reset
<b>Service</b>	Identifying indoor units side-by-side Temperature Unit - °C / °F
<b>Schedule</b>	Built-in Timer (On / Off)

## EXAMPLE OF SYSTEM CONFIGURATION

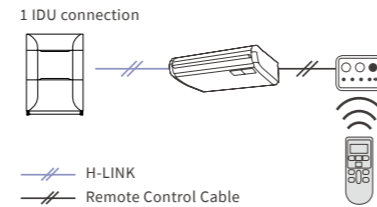

# RECEIVER KIT FOR WIRELESS REMOTE CONTROLLER

Model	HR4A10NEWQ (Standard) (*1)	PC-ALH3 (Optional) (*1)	PC-ALHC1	PC-ALHD1	PC-ALHS1	PC-ALHP1	PC-RLH11 (Standard) (*1)	PC-ALHZ1 (Optional)	
IDU type	4-way cassette RCI-FSKDNQ	4-way cassette compact RCIM-FSN4	2-way cassette RCD-FSN3	1-way cassette RCS-FSN	Ceiling suspended RPC-FSN3	Ducted RPIH-HNAUNQ RPIM-HNAUNQ RPIL-HNAUNQ RPIZ-FSNQS/P RPIZ-HNATNQ RPIZ-HNDTSQ RPI-FSNQ RPI-FSN3Q	Floor concealed RPF1-FSNQ	Floor/ceiling convertible RPF1-FSNQ RPFC-FSNQ (*2)	Wall mounted RPK-FSNQS (*2) RPK-FSN4M (*3)
Compatible wireless remote controller	HCRB10NEWQ PC-LH3A								

(\*1) Fan speed = 3 taps available only when you use the standard receiver kit (PC-RLH11 or HR4A10NEWQ)  
 (\*2) Concerning only [Floor/Ceiling Convertible type: RPF1-FSNQ] & [Wall Mounted Unit: RPK-FSNQS] Standard Receiver kit (PC-RLH11) is equipped with the unit in package as standard optional part with Wireless Remote Controller (PC-LH3A)  
 (\*3) Receiver Kit is installed in the unit as standard part. Please use Receiver Kit (PC-ALHZ1) when receiver kit needs to be installed separately from unit.

Notes  
 When you use standard receiver kit (PC-RLH11 or HR4A10NEWQ) equipped with wireless remote controller (PC-LH3A)  
 1) Setting Hi2 air flow rate is not available even if the connected indoor units has Hi2 air flow rate setting  
 2) It is not available to set up "remote control switch operation prohibited by each function setting" from central station (mini/EZ/EX)  
 3) It is not available to set up "remote control switch temperature setting range limitation function" from central station (mini/EZ/EX)

# WIRELESS REMOTE CONTROLLER PC-LH3A



## SPECIFICATIONS

**Outer Dimensions (H×W×D)**  
(mm) 125.0×56.0×16.4


## FUNCTIONS

<b>Setting</b>	Run / Stop Operation Mode Auto Mode Setting Temperature Setting Temperature Setting Rate _ 1°C Fan Speed _ 3 Taps Louver Direction
<b>Service</b>	Identifying indoor units side-by-side Temperature Unit _ °C
<b>Schedule</b>	Built-in Timer (On / Off)

※When you use Standard Receiver kit equipped with PC-LH3A (Wired Remote Controller), Centralized Controller cannot be operated.



# CENTRAL STATION mini FOR SMALL-SCALE BUILDINGS PSC-A32MN

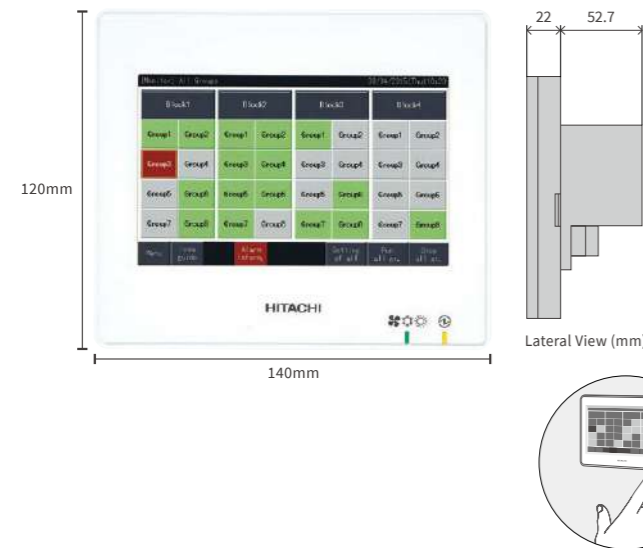

## CAPACITY

RC group	32
Group	32
Block	4 Patterns (2/4/8/16)
Indoor Unit	160
Outdoor Unit	64
Building Scale	Small

## SPECIFICATIONS

Rated Power Supply	1-, AC 100-240V, 50/60Hz
Electrical Power Consumption	20W (Max.)
Communication Unit	Units of Adopting for H-LINK
Communication Line	Non-polar 2-wire
Communication Speed	9,600bps
Wiring Length	1,000m (Total Length)
Display	5.0-inch Wide Color LCD (Full Dot)
Display Control	Touch Panel

## FUNCTIONS

<b>Monitor Function</b>	<ul style="list-style-type: none"> <li>Run/Stop/Abnormality</li> <li>Setting Temperature</li> <li>RCS Operation Prohibited Setting</li> <li>Accumulated Operating Time</li> <li>Operation Mode</li> <li>Setting Fan Speed</li> <li>Setting Louver</li> <li>Filter Sign</li> <li>Alarm Code*</li> </ul>
<b>Control Function</b>	<ul style="list-style-type: none"> <li>Run/Stop*</li> <li>Fan Speed</li> <li>Operation Mode</li> <li>Louver</li> <li>Temperature Setting</li> <li>RCS Operation Prohibited</li> <li>Filter Sign Reset</li> </ul>


\*: "All Groups Run/Stop" command signal exception function for selected groups is available by "Exception of Run/Stop Operation." function.

Most compact in our touch panel centralized controller. Its down-to-detail control functionalities, such as Weekly Scheduling, Accumulated Work Hours, etc., help you save energy. Up to 32 remote-controlled groups and up to 160 indoor units can be connected to the single air-conditioning system.

## RECOMMENDED FACILITIES



## EXAMPLE OF SYSTEM CONFIGURATION

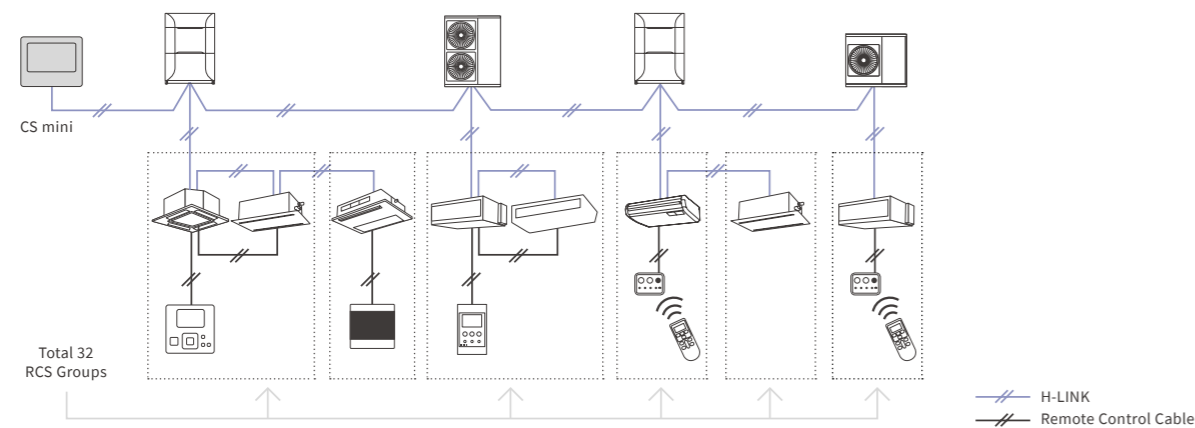

## (5-inch) Touch Panel Operation

Easy to check the operation status using either of two monitoring screens (all groups or four pattern blocks [2/4/8/16])



[Monitor (Block)]

## RCS Group Function Control


-each operational item blocking-prevent incorrect operation



ON/OFF, "operation mode," "fan speed," "swing louver direction," "setting temperature," and "prohibition of remote control operation for individual items (run/stop, operation mode, fan speed, wind direction, setting temperature)"

## Energy Saving

Outdoor unit power consumption control by schedule or external signals. Setting temperature range.

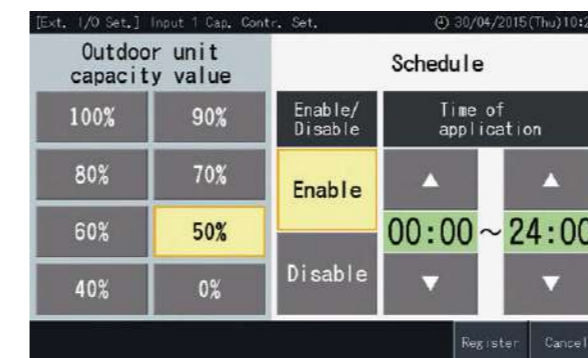

[Capacity Control of ODU]

## Schedule

Up to 10 actions/day per RCS group can be set as available as auto switch-off timer



mini		In case of classroom in cooling mode	
9:00	~	10:00	27 °C Class: on
10:00	~	11:00	27 °C Class: on
11:00	~	12:00	- °C No class: off
12:00	~	13:00	25 °C LUNCH TIME
13:00	~	14:00	- °C No class: off
14:00	~	15:00	27 °C Class: on
15:00	~	16:00	- °C No class: off
16:00	~	17:00	27 °C Class: on
17:00	~	-	- °C No class: off

## Accumulated Operation-Time Visualization

Support energy-saving management




ON/OFF, "operation mode," "fan speed," "swing louver direction," "setting temperature," and "prohibition of remote control operation for individual items (run/stop, operation mode, fan speed, wind direction, setting temperature)"



[Temperature Limitation for Each Remote Controller]

# CENTRAL STATION EZ FOR MEDIUM-SCALE BUILDINGS PSC-A64GT

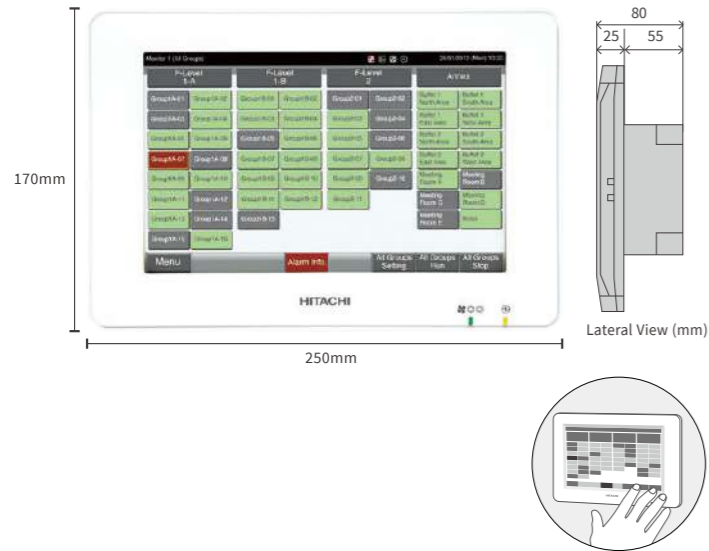

Easy control with 8.5 inch color touch panel, Its down-to-detail control functionalities, such as Weekly Scheduling, Accumulated Work Hours, etc., help you save energy. Up to 64 remote-controlled groups and up to 160 indoor units can be connected to the single air-conditioning system.

## CAPACITY

RC group	64
Group	64
Block	4 Patterns
Indoor Unit	160
Outdoor Unit	64
Building Scale	Small - Medium

## SPECIFICATIONS

Rated Power Supply	1-, AC 100-240V, 50/60Hz
Electrical Power Consumption	30W (Max.)
Communication Unit	Units of Adopting for H-LINK
Communication Line	Non-polar 2-wire
Communication Speed	9,600bps
Wiring Length	1,000m (Total Length)
Display	8.5-inch Wide Color LCD (Full Dot)
Display Control	Touch Panel

## FUNCTIONS


<b>Monitor Function</b>	<ul style="list-style-type: none"> <li>• Run/Stop/Abnormality</li> <li>• RCS Operation Prohibited Setting</li> <li>• Accumulated Operating Time</li> <li>• Operation Mode</li> <li>• Setting Fan Speed</li> <li>• Setting Louver</li> <li>• Filter Sign</li> <li>• Alarm Code</li> </ul>
<b>Control Function</b>	<ul style="list-style-type: none"> <li>• Run/Stop*</li> <li>• Fan Speed</li> <li>• Operation Mode</li> <li>• Louver</li> <li>• Temperature Setting</li> <li>• RCS Operation Prohibited</li> <li>• Filter Sign Reset</li> </ul>

\*: "All Groups Run/Stop" command signal exception function for selected groups is available by "Exception of Run/Stop Operation." function.

## RECOMMENDED FACILITIES



## EXAMPLE OF SYSTEM CONFIGURATION

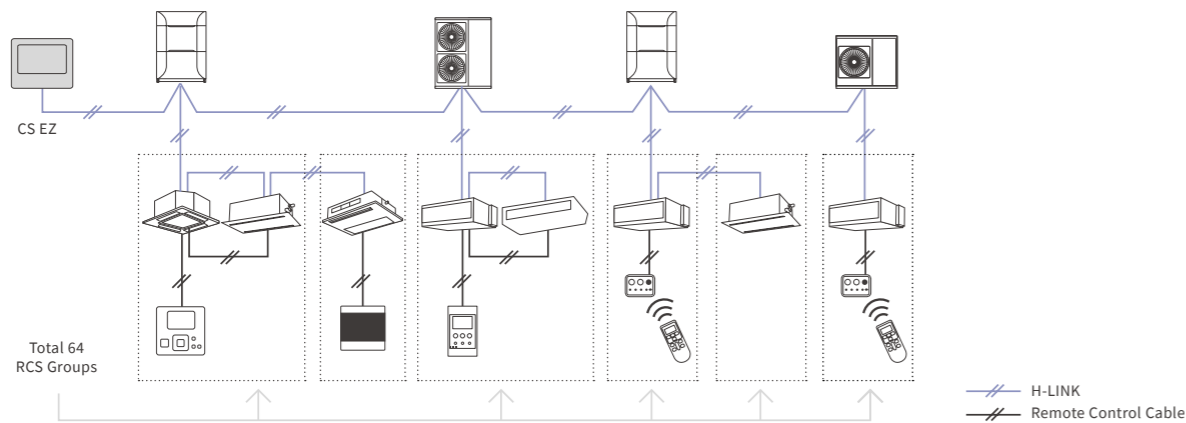

## (8.5-inch) Touch Panel Operation

A total of 64 remote controller groups (4 blocks)(64 outdoor units/160 indoor units) can be controlled Easy to check the operation status using either of two monitoring screens (all groups or blocks) The panel for the block is bigger than for the CS MINI; you can check Mode, Fan Speed, Louver, Temperature, Inlet and Ambient Temperature.




[Monitor 1 (all groups)]



[Monitor 2 (block)]


## ACCUMULATED OPERATION-TIME VISUALIZATION

Supports Energy-Saving Management

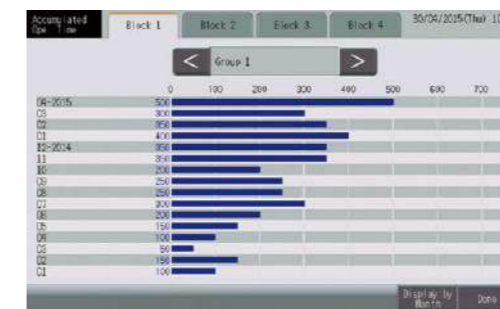

## Alarm Information

Red color indication: immediate display of malfunction location and cause.

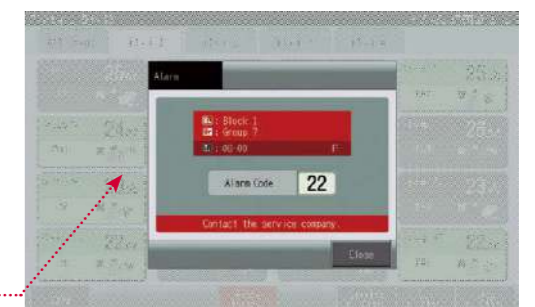

## Schedule

Up to 10 actions/day per RCS groups can be set as available as auto switch-off timer.



[Weekly Schedule]



[Holiday Setting]

# CENTRAL STATION EX FOR LARGE-SCALE BUILDINGS PSC-A128EX



Energy Calculation Software\*  
**PSC-AS01EX**  
\*Required only for calculating electricity

## CAPACITY

<b>H-LINK</b>	16
<b>Remote Controller group</b>	2,560 (*1)
<b>Group</b>	2,048 (*1)
<b>Block</b>	512 (*2)
<b>Area</b>	512 (*2)
<b>Indoor unit</b>	2,560 (*1)
<b>Outdoor unit</b>	1,024 (*1)
<b>Building scale</b>	Large

(\*1) One external adapter can control [160 RC groups / 128 groups / 160 IDUs / 64 ODUs / Each layout], and Central Station EX can connect up to 15 adapters.  
(\*2) No restriction on the number of H-LINK

## SPECIFICATIONS

<b>Rated power supply</b>	100-240VAC ± 10% (50/60Hz)
<b>Electrical power consumption</b>	50W (Max.)
<b>Communication unit</b>	Units of Adopting for H-LINK
<b>Communication line</b>	Nonpolar Two Wires
<b>Communication speed</b>	9,600bps
<b>Wiring length</b>	1,000m (Total Length)
<b>Display</b>	12.1 inch TFT color liquid crystal display
<b>Display control</b>	Touch Panel

For large scale buildings such as hotels, educational facilities, or hospitals, our Central Station EX features a highly intuitive and functional 12.1-inch wide, wall-mountable, colorful LCD screen. Control up to 2,560 indoor units with our proprietary H-LINK system with 15 Extension Adapters (PSC-AD128EX)

## RECOMMENDED FACILITIES



## FUNCTIONS

<b>Operation unit</b>	All together Each area Each block Each group Each RCS group
<b>Control function</b>	On/Off Mode Set temperature Fan speed Louver RC prohibition Filter sign reset Function selection for indoor units (*1) Function selection for outdoor units (*2) Capacity control for outdoor units (*2) Lower noise control for outdoor units (*2)
<b>Monitor function</b>	On/Off Mode Set temperature Air intake temperature RC sensor temperature (*3) Air intake temperature of outdoor unit Fan Speed Louver RC prohibition Thermo-ON information Filter sign/Auto cleaning fault Alarm status/Alarm codes
<b>Schedule function</b>	Each of the following setting is available in 3 different [annual][summer][winter] category => Weekly schedule => Up to 16 actions can be set per day => Exception day setting: 5 different types => Holiday setting
<b>History</b>	Alarm history: 10,000 records External In/Output history: 1,000 records Pulse input history: 6 months
<b>Management report visualization</b>	Each of the following data of up to 2 years can be shown: • Accumulated operation time (min.) • Accumulated thermo-ON time (min.) • Average air intake temp temperature of indoor unit • Average air intake temperature of outdoor unit • Average setting temperature • Average RC sensor temperature


<b>Energy saving</b>	• Run/Stop • RC prohibition • Temperature shift (For Cool/Dry mode: +1°C ~ +9°C (+1°F ~ +18°F)) • Mode shift (Mode shifted to Fan when in Cool/Dry mode) • Capacity control on outdoor units • Lower noise control for outdoor units
<b>External input / output</b>	<b>Control/Monitor</b> => Controlled items: • Run/Stop • Mode (Cool) => Monitored items: • Run/Stop • Mode (Cool) • Alarm state
<b>Others</b>	• Power consumption signal input • Emergency stop

(\*1) Some indoor units may not fully support all functions.  
(\*2) It is available for applicable outdoor units only.  
(\*3) There is a case that it cannot be shown in the screen, depending on the remote controller setting.

## EASY TO READ, EASY TO USE


The stand-alone Central Station EX uses a touch screen, capacitive LCD panel.

Better display resolution (1,280x800)  
Larger screen (12.1 inches wide)

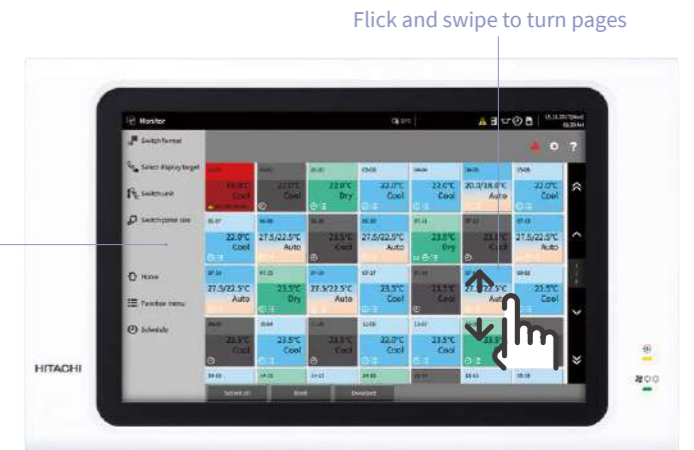


## BETTER ENERGY SAVING AND QUICKER MANAGEMENT

Management reports can be visualized in various ways, and data can be acquired using SD memory and USB flash devices.

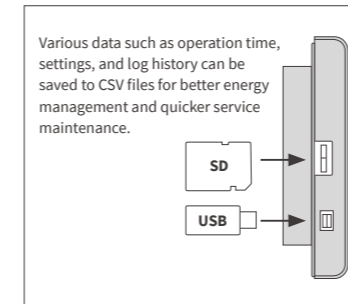

The following data can be displayed up to the previous two years:

- Accumulated operation time (min.)
- Accumulated thermo-ON time (min.)
- Average air intake temperature of indoor unit
- Average air intake temperature of outdoor unit
- Average setting temperature
- Average RC sensor temperature (It may not be available depending on RC settings.)

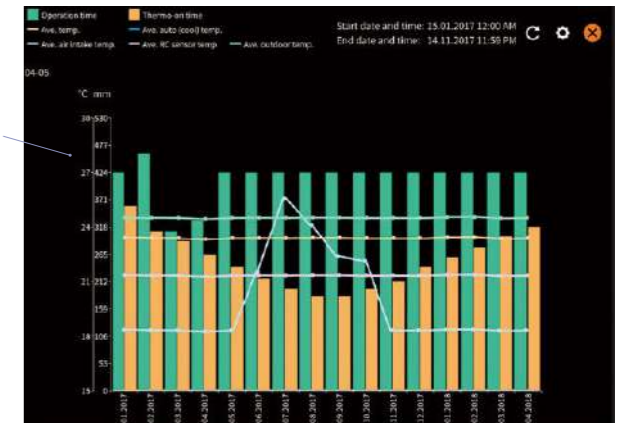


## IMPROVED SCHEDULE SETTING

Three long-term category settings are now available: Annual, Summer, and Winter.

Touch and hold the memory axis to add the memory to the schedule

Schedules can be color coded for easy confirmation

Touch the + button to see the detailed schedule

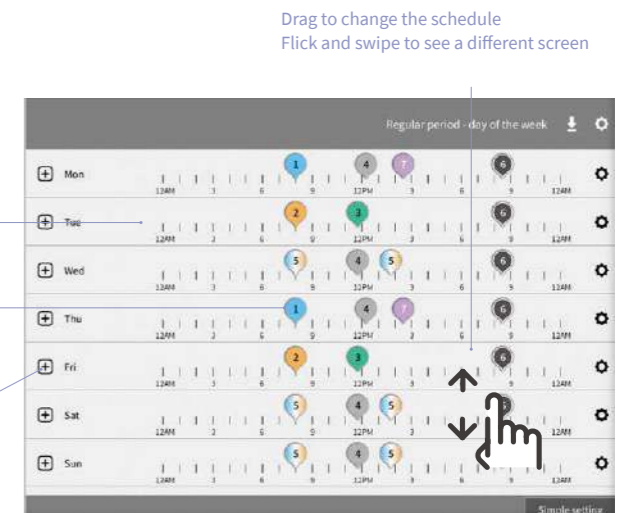

# CENTRAL STATION EX FOR LARGE-SCALE BUILDINGS PSC-A128EX

## INTUITIVE INTERFACE FOR BETTER MONITORING



Three monitoring styles are available.

### 1. Panel style

The panel color clearly shows the air conditioner operation mode.

One maximum-sized panel can show the following items with colors and icons for easy confirmation:

- Room name
- Run/stop
- Mode
- Temperature
- Fan speed
- Louver
- Air intake temperature (RC sensor temperature or indoor temperature)
- Current status icon

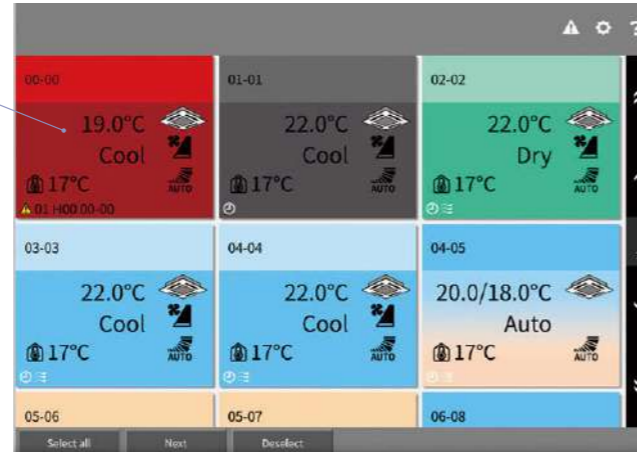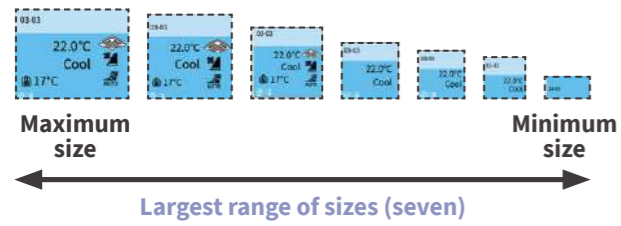


### 2. Layout style


Upload your own layout images in multiple formats (BMP, JPEG, PNG) and easily arrange indoor units by dragging them on the touch panel.



Floor view

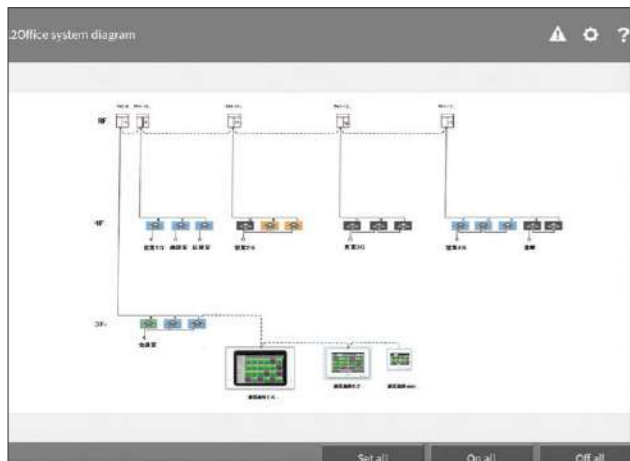

System diagram

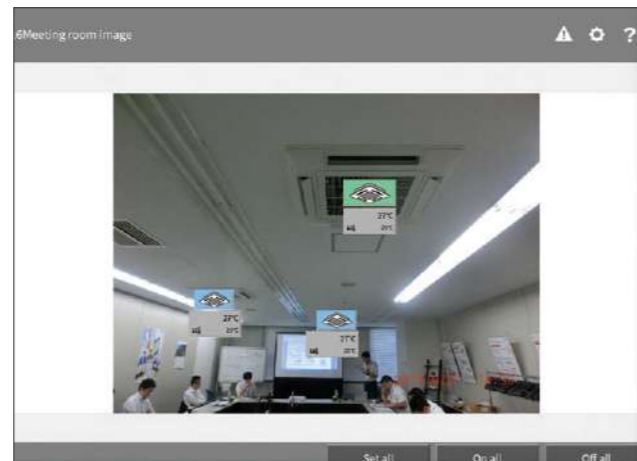

Actual room image

### 3. List style


Setting/control information is shown in a list that can be filtered and sorted for easy confirmation and comparison. In the list display, normal temperature and power consumption are provided so users can select formats according to their desired items.





# CENTRAL STATION FOR SMALL-MEDIUM-SCALE BUILDINGS

PSC-A64S

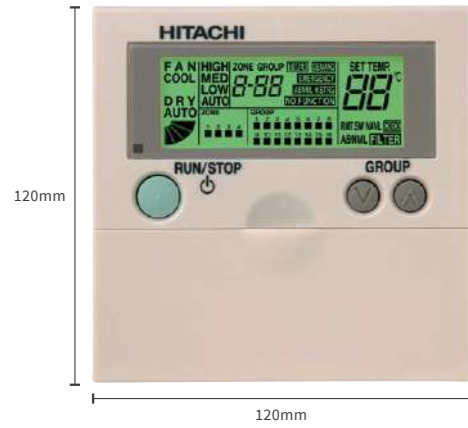

## SPECIFICATIONS

### Outer Dimensions (H×W×D)

(mm) 120.0×120.0×70.5

### CAPACITY

RC group	64
Group	64
Block	4 Patterns
Indoor Unit	160
Outdoor Unit	64


### FUNCTIONS

<b>Monitor Function</b>	<ul style="list-style-type: none"> <li>• Run/Stop/Abnormality</li> <li>• Setting Temperature</li> <li>• RCS Operation Prohibited Setting</li> <li>• Accumulated Operating Time</li> <li>• Operation Mode</li> <li>• Setting Fan Speed</li> <li>• Setting Louver</li> <li>• Filter Sign</li> <li>• Alarm Code</li> </ul>
<b>Control Function</b>	<ul style="list-style-type: none"> <li>• Run/Stop*</li> <li>• Fan Speed</li> <li>• Operation Mode</li> <li>• Louver</li> <li>• Temperature Setting</li> <li>• RCS Operation Prohibited</li> <li>• Filter Sign Reset</li> </ul>

\*: "All Groups Run/Stop" command signal exception function for selected groups is available by "Exception of Run/Stop Operation." function.

If your site has a dedicated building manager, the Central Station PSC-A64S is suitable for providing convenient monitoring of indoor climates. It controls up to 160 indoor units and up to 8 sub-controllers can be connected via H-LINK. In addition to setting the operation mode and temperature, PSC-A64S also gives you advanced control over air quality and louver orientation. Should a problem occur, a dedicated alarm code helps you identify the issue.

# CENTRALIZED ON / OFF CONTROLLER PSC-A16RS

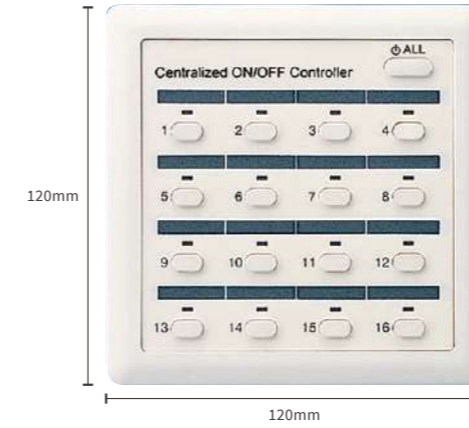

## SPECIFICATIONS

### Outer Dimensions (H×W×D)

(mm) 120.0×120.0×68.5

### CAPACITY

RCS group	16
Group	64
Block	-
Indoor Unit	160
Outdoor Unit	-

### FUNCTIONS

<b>Monitor Function</b>	<ul style="list-style-type: none"> <li>• Run/Stop</li> <li>• Alarm Notification</li> </ul>
<b>Control Function</b>	<ul style="list-style-type: none"> <li>• Individual Run/Stop</li> <li>• Simultaneous All Run/Stop</li> </ul>

- Only performs operation / stop control per remote control group.
- By connecting to the H-LINK, up to 16 remote control groups and 160 indoor units can be controlled. Up to 8 controllers can be connected to the H-LINK.
- An external input terminal is provided as standard. External signals enable the following functions: central operation / stop, emergency stop, central operation output, central alarm output.
- Can be used in combination with the central station.
- \*Be sure to use it with a remote control switch. Indoor units cannot be used without a remote control switch.
- \*There are restrictions on remote group registration. Please contact our sales staff for more information.




# H-LINK

## WHAT IS H-LINK?

H-LINK is a "Hitachi" original communication system that can be used to control multiple outdoor and indoor units from one control point. Its use assists installers and service engineers by simplifying commissioning and service maintenance. For building owners and occupants, it provides outstanding versatility enabling the connection of various types of central control options, enabling better system management. Our proprietary high-performance communication system enables the connection of control wiring between indoor and outdoor units, and between a centralized control system and indoor/outdoor units across two or more refrigerant systems.

### Basic Wiring

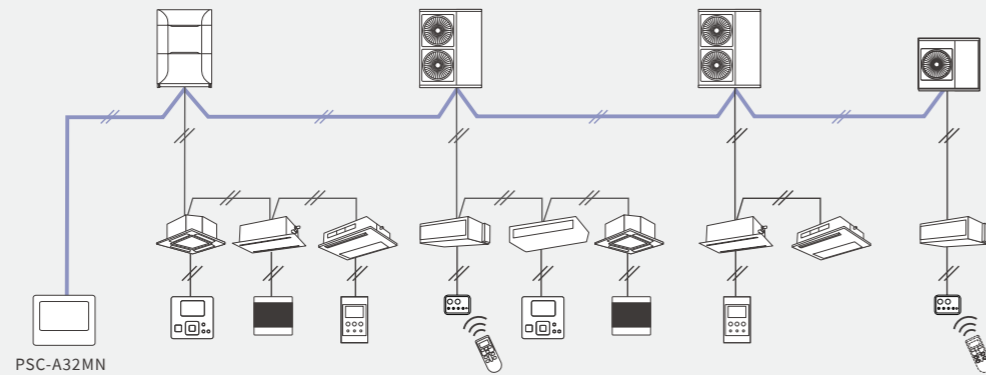

## ADVANTAGES

1. A multi air conditioner for a building and a package air conditioner for a store or office. It can be used with a home air conditioner.
2. There are no restrictions on the delivery route or order for wiring.
3. Just connect to a terminal block.  
(An adapter and a dedicated connector are not necessary.)

## RECOMMENDED FACILITY (EXAMPLE)



Educational institutions such as primary schools where installation work cannot be performed on weekdays.




Hotels where it is preferable to complete installation work during late evenings.



Rehabilitation facilities or hospitals where it is necessary to minimize the burden on users.

## DEFINITION OF TERMS IN HITACHI CENTRALIZED CONTROL SYSTEMS

1. CS-Net / Central Station  
→ Hitachi original central controller
2. RCS Group (Remote Controller System Group)  
→ Stands for a number of indoor units (up to 16 units) connected using "same remote controller" wiring. In this group, connected indoor units are all controlled in the same way.
3. Group  
→ Stands for the multiple "RCS groups" that are registered in the central controller network setting.
4. Block  
→ Stands for the multiple "groups" that are registered in the central controller network setting.

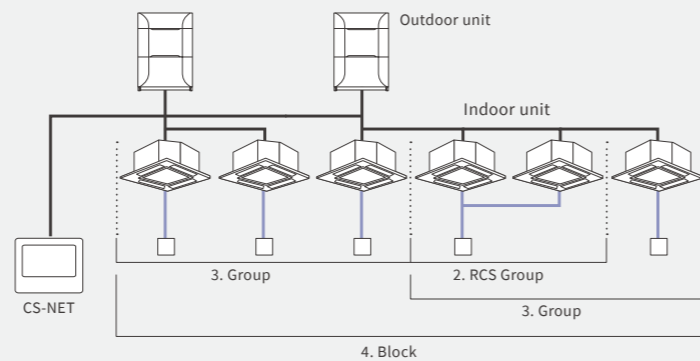


## POINT

### Flexible Wiring Routes


**(1) If indoor units are located in one place and the indoor unit to be controlled is in the room where "Centralized Controller" is installed**

- Overall control is possible by connecting "Centralized Controller" to the indoor unit.
- Delivery distance can be greatly reduced.

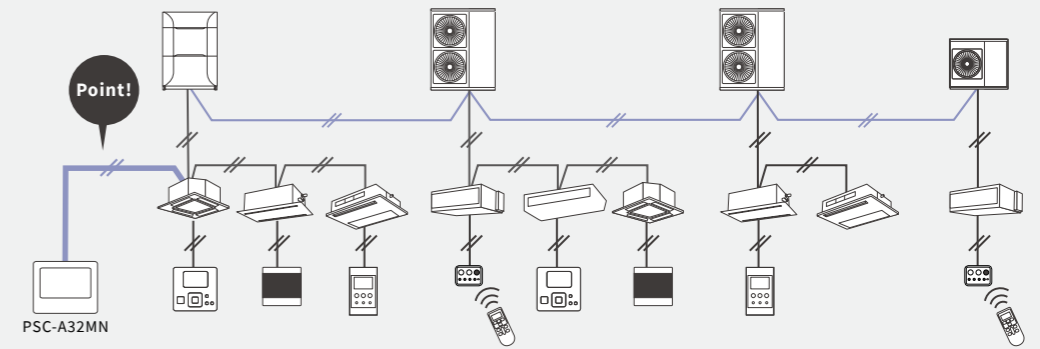


**(2) If indoor units are located in two places and any indoor units of each system are located close together**

- Overall control is possible by connecting part of the indoor units of each system.
- Delivery distance can be greatly reduced.

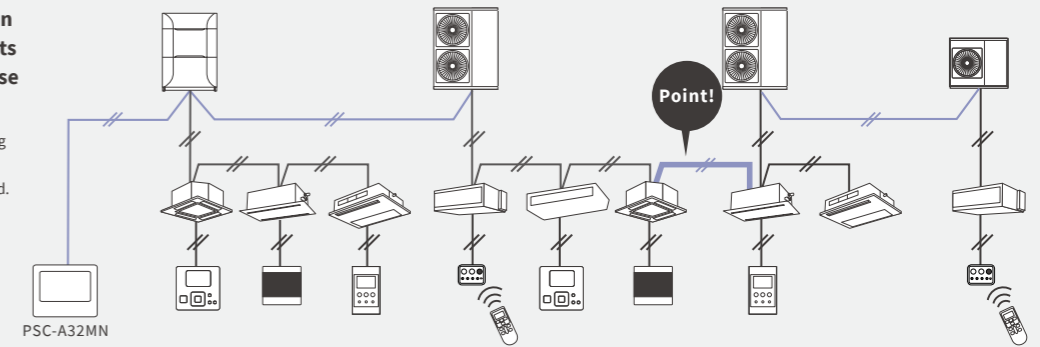


**(3) If two systems are completely separated**

- Overall control is possible by separately connecting the two systems to "Centralized Controller."
- It is possible to select a wiring route based on the wiring distance and the ease of installation.

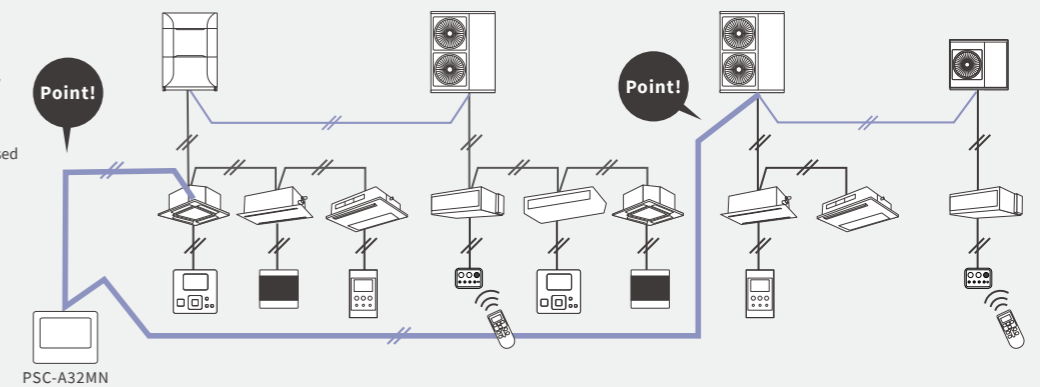

**(4) If indoor units are located discretely**


- Overall control is possible by connecting indoor units.
- Installation is possible through indoor wiring only without outdoor wiring.

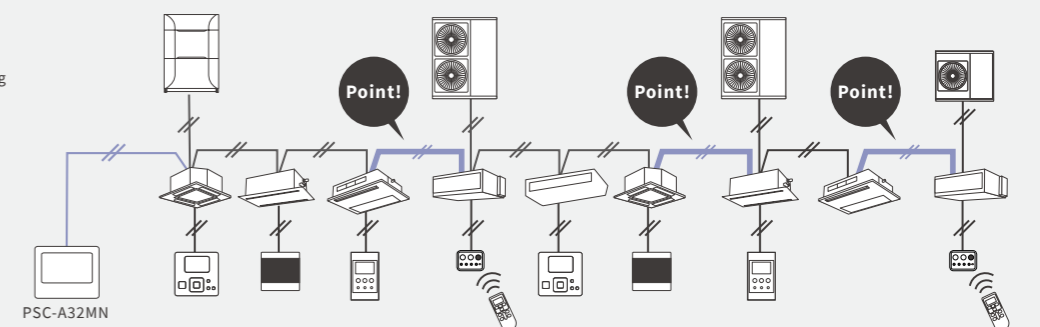

**BMS ADAPTER for BACnet®** HC-A64BNP1  
Control up to 64 Indoor Units



**EXAMPLE OF SYSTEM CONFIGURATION**

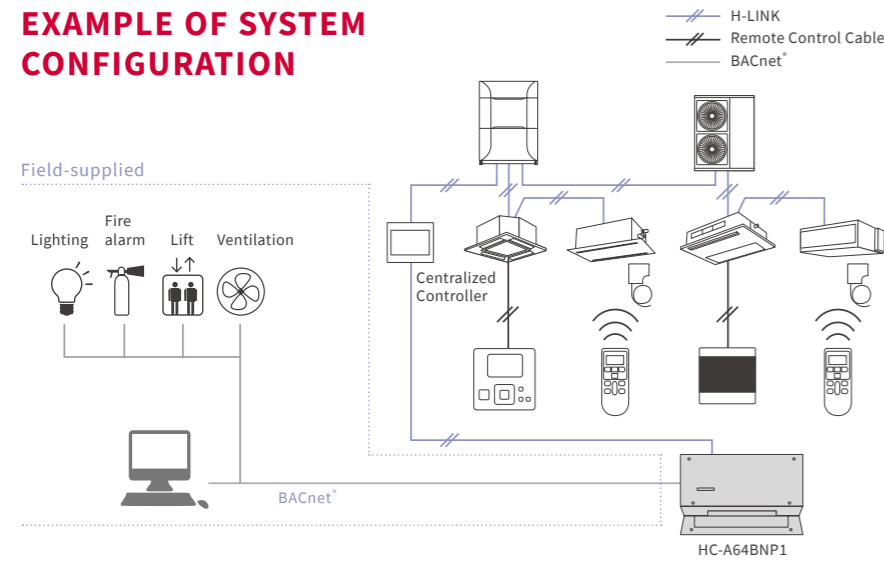

**SPECIFICATIONS**

**Outer Dimensions (H×W×D)**  
(mm) 68.0×240.0×154.0

**FUNCTIONS**

<b>Corresponding BACnet® Standard</b>	ANSI / ASHRAE Standard 135-2004
<b>Control Item at Upper System</b>	<ul style="list-style-type: none"> <li>• Run Stop (Setting)</li> <li>• Operation Mode (Setting)</li> <li>• Fan Speed Level (Setting)</li> <li>• Indoor Temperature (Setting)</li> <li>• Prohibiting RC Operation (Setting)</li> <li>• Filter Sign Reset</li> </ul>
<b>Monitoring Item at Upper System</b>	<ul style="list-style-type: none"> <li>• Run Stop (State)</li> <li>• Operation Mode (State)</li> <li>• Fan Speed Level (State)</li> <li>• Indoor Temperature (State)</li> <li>• Prohibiting RC Operation (State)</li> <li>• Filter Sign</li> <li>• Indoor Air Intake Temperature</li> <li>• Alarm Signal</li> <li>• Alarm Code</li> <li>• Communication State</li> </ul>


**7 DAY TIMER** PSC-A1T  
Scheduling Operation with PSC-A64S / PSC-A16RS



**SPECIFICATIONS**

**Outer Dimensions (H×W×D)**  
(mm) 120.0×120.0×17.0

**EXAMPLE OF SYSTEM CONFIGURATION**

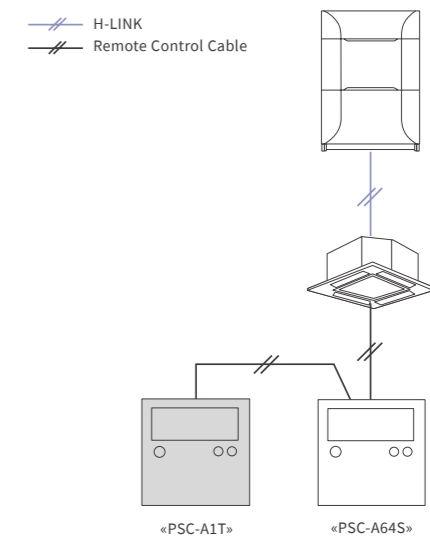


- By using PSC-A1T with PSC-A64S or PSC-A16RS controllers, the air conditioners controlled by them can be operated according to a schedule.
- The timer can be set at 7-day intervals, and operation / stop can be set 3 times daily.
- Remote control can be prohibited in accordance with the OFF time (when used with PSC-A64S and PSC-A16RS).
- Two types of weekly schedule (A and B) can be set, and can easily be changed for summer and winter.
- The settings are all digitally displayed, allowing operations and settings to be checked easily.
- The power failure backup function prevents the timer from being stopped due to a power failure lasting up to 2 weeks.

**BMS ADAPTER for LONWORKS®** HARC70-PE1  
Bigger Connection Capacity (Up to 128 Indoor Units)



**EXAMPLE OF SYSTEM CONFIGURATION**

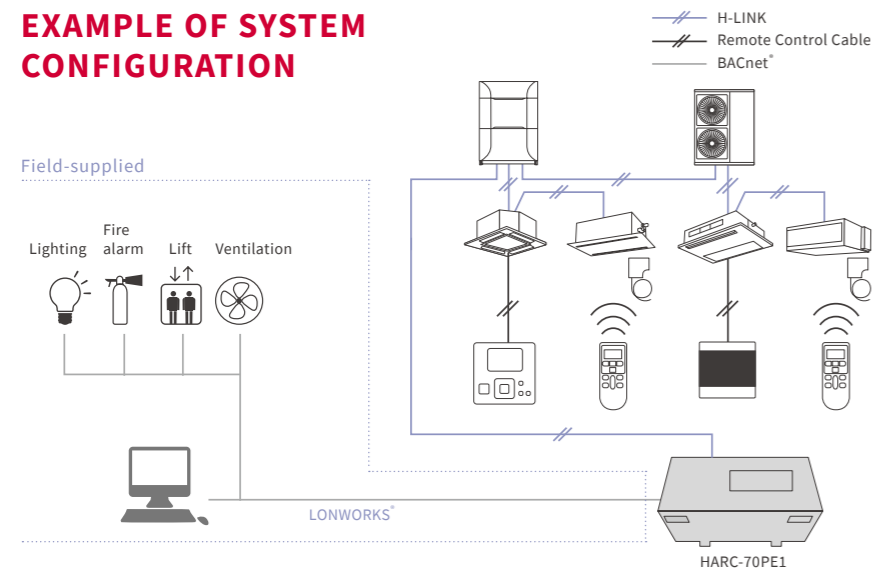

**SPECIFICATIONS**

**Outer Dimensions (H×W×D)**  
(mm) 80.0×170.0×75.0

**FUNCTIONS**

<b>Connection Method to Upper System</b>	Connection by SNVT (Standard Network Variable Type) to LONWORKS® Network
<b>Quantity of Connection</b>	8 Remote Control Groups (Max. 128 indoor Units)
<b>Control Item in Upper System (ng: 0-7)</b>	<ul style="list-style-type: none"> <li>• On / Off Order (nviOnOff_ng)</li> <li>• Operation Mode Setting (nviMode_ng)</li> <li>• Temperature Setting (nviSetPoint_ng)</li> <li>• All On / Off Order (nvi All OnOff)</li> <li>• On / Off State &amp; Alarm (nvoOnOff_ng)</li> </ul>
<b>Monitoring Item in Upper System (ng: 0-7)</b>	<ul style="list-style-type: none"> <li>• Operation Mode State (nvoMode_ng)</li> <li>• Temperature Setting (nvoSetPoint_ng)</li> <li>• Individual Thermostat State (nvoThermo_ng)</li> </ul>

\*The number of maximum connectable refrigerant systems is 8 (0 to 7). The available setting range of refrigerant system number and indoor unit addresses is 0 to 15.

OUR HERITAGE

MAIN PRODUCTS

Air Compressor, Casting      Roller, Casting      PAC, Refrigerators, Compressor for REF, Casting      PAC, Refrigerators, Compressor      VRF, PAC, Compressors

**1943** Shimizu Factory Founded

**1951** Roller for mill

**1952** Japan's 1st window-type air conditioner, installed in a hotel in Kyoto

**1956** Compressor for Refrigerators

**1958** Large casting; fan for tunnel

**1961** PAC exported from Shimizuto UK for the 1st time

**1963** Hitachi's 1st Packaged AC (Water-cooled) (Floor Standing type)

**1965** 1st air-cooled Unitary PAC for export market

**1970** 1st training school established

**1971** Indoor unit: Floor-exposed type (RPF)

**1972** Indoor unit: Ceiling Suspended type (RPC)

**1973** Outdoor unit: for low-ambient-temperature market

**1976** 2nd Overseas Factory founded in Brazil

**1978** Outdoor unit: PAC controlled by micro-computer built-in

**1979** Indoor unit: Wall Mounted type (RPK)

**1981** Indoor unit: Ceiling Cassette type

**1982** Outdoor unit: PAC controlled by micro-computer built-in

**1983** Hitachi's 1st Inverter-driven VRF With Scroll Compressor built-in

**1984** Hitachi's first VRF "High-Multi" series  
Contains multiple reciprocating compressors  
Individual indoor unit control available

**1986** VRF 3RD GENERATION  
Up to 5 indoor units  
World 1st IGBT Inverter-driven VRF  
Up to 115 Hz 1986

**1988** VRF 2ND GENERATION  
Hitachi's 1st Inverter-driven VRF With Scroll Compressor built-in

**1990** VRF 4TH GENERATION  
10 HP  
Up to 8 indoor units (130% capacity)  
World 1st IGBT built-in Inverter VRF leading to top-in-class quietest operation

**1991** VRF 5TH GENERATION  
30HP  
Up to 12 indoor units (130% in capacity)  
Newly R407C adopted VRF "SET FREE FSG": heat-pump type "SET FREE FXG": heat-recovery type

**1996** 5th overseas factory in the Philippines

**1999** 1st Scroll Compressor Factory in China

**2003** 6th overseas factory in China

**2005** Centrifugal VRF Point: "Outdoor unit" that can be installed inside the building

**2011** VRF 7TH GENERATION  
54HP  
Heat-pump/Heat-recovery compatible Modular System VRF "SET FREE FSXN"

**2012** VRF 8TH GENERATION  
96HP  
Hitachi New Generation VRF  
This New Generation VRF is 8th Generation VRF after 33 Years Experience in VRF

**2016** VRF 6TH GENERATION  
32 HP  
Newly R410A adopted VRF "SET FREE FSN": heat-pump type "SET FREE FXN": heat-recovery type

**3rd overseas factory in Malaysia**

SET FREE Σ CNCQ series

OUR HERITAGE